

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642567

Luminaire Tested: ML5615LSFL409FS1E - 692SC - 1200LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642567
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-37)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSFL409FS1E - 692SC - 1200LM - 3000K
Description: ML56 RR, 40D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1489.5 lumens
Efficiency: N/A
Efficacy: 111.2 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.66
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642567
CATALOG NUMBER: ML5615LSFL409FS1E - 692SC - 1200LM - 3000K

Luminous Intensity Polar Plot

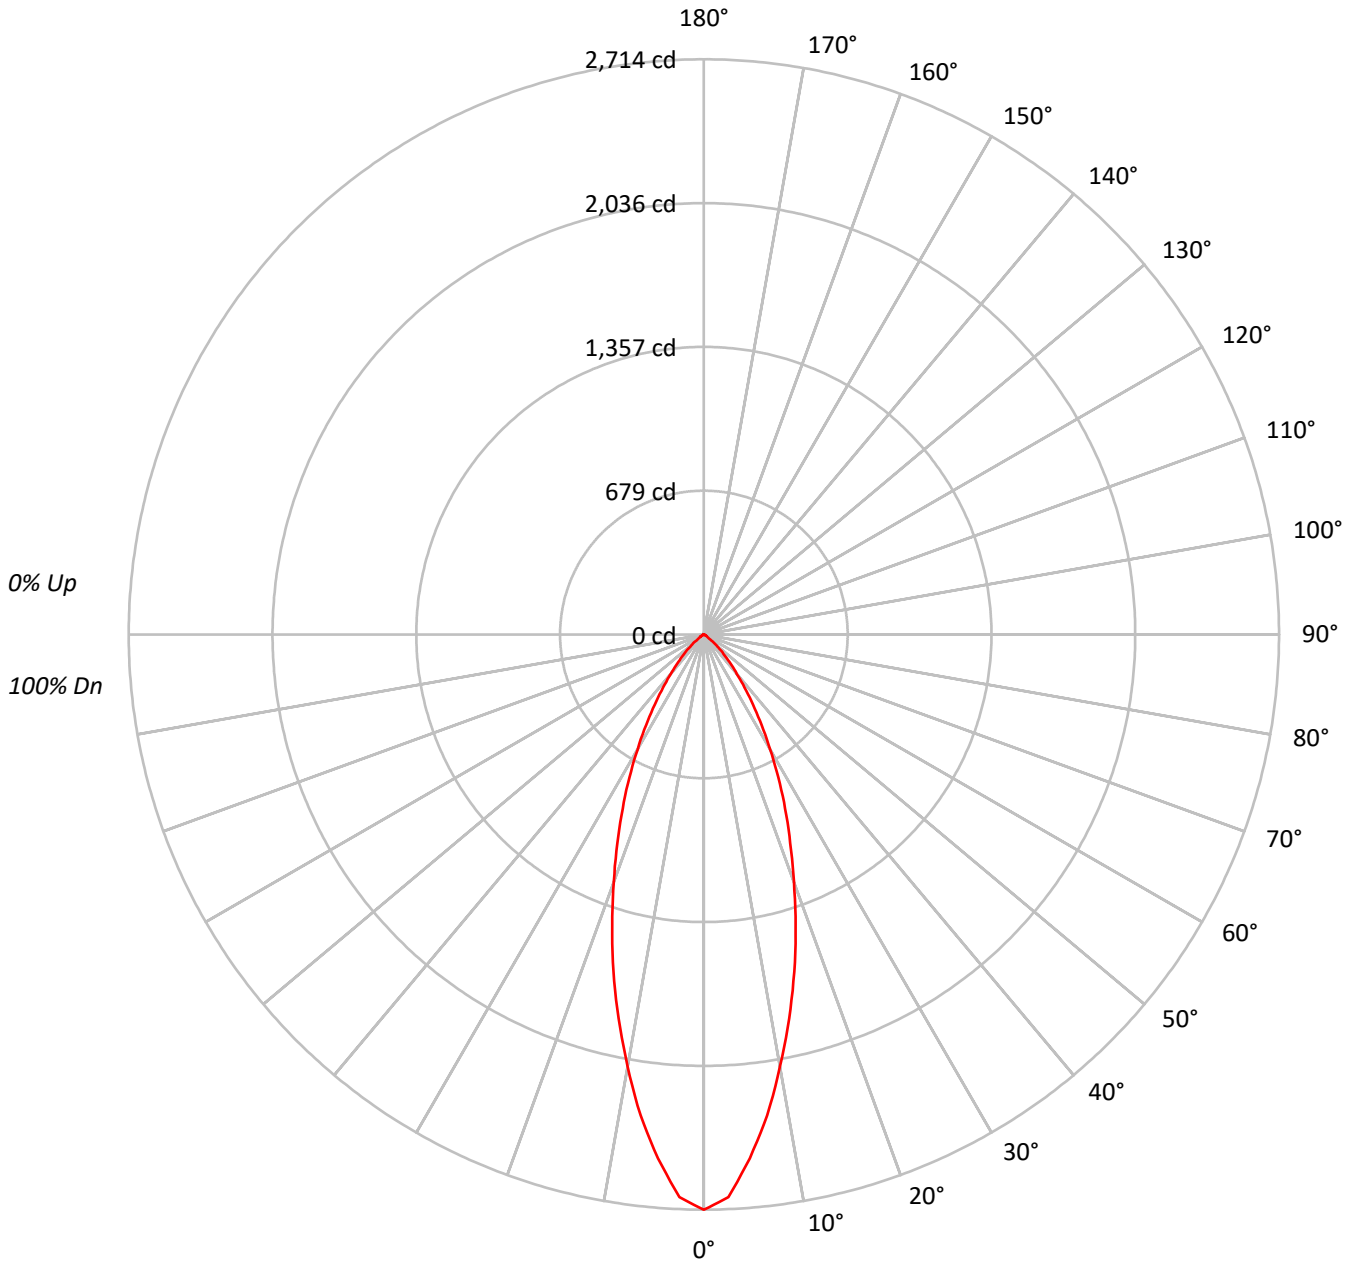



TEST NUMBER: P642567

CATALOG NUMBER: ML5615LSFL409FS1E - 692SC - 1200LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88																			
3	103	97	92	88	101	96	91	88	93	89	86	91	88	85	88	86	84	82																			
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77																			
5	94	86	80	76	92	85	79	75	83	78	75	81	77	74	80	76	73	72																			
6	89	81	75	71	88	80	74	71	78	74	70	77	73	70	76	72	69	68																			
7	85	76	70	66	84	76	70	66	74	69	66	73	69	66	72	68	65	64																			
8	81	72	66	62	80	72	66	62	71	66	62	69	65	62	69	65	62	60																			
9	78	68	63	59	77	68	63	59	67	62	59	66	62	59	65	61	58	57																			
10	74	65	60	56	73	65	59	56	64	59	56	63	59	56	62	58	55	54																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	148798
5°	136550
10°	115239
15°	93491
20°	72415
25°	54856
30°	39538
35°	26997
40°	17318
45°	10590
50°	5552
55°	2112
60°	1283
65°	506
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10590 cd/sqm



TEST NUMBER: P642567

CATALOG NUMBER: ML5615LSFL409FS1E - 692SC - 1200LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	224.2	15.1
10°-20°	455.5	30.6
20°-30°	415.8	27.9
30°-40°	255.7	17.2
40°-50°	109.8	7.4
50°-60°	24.3	1.6
60°-70°	4.3	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1095.6	73.6
0°-40°	1351.2	90.7
0°-60°	1485.2	99.7
0°-90°	1489.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1489.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2714	
5°	2481	224
15°	1647	456
25°	907	416
35°	403	256
45°	137	110
55°	22	24
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642567

CATALOG NUMBER: ML5615LSFL409FS1E - 692SC - 1200LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2714.3
2.5°	2657.0
5°	2481.4
7.5°	2288.8
10°	2070.2
12.5°	1856.8
15°	1647.3
17.5°	1437.8
20°	1241.3
22.5°	1065.7
25°	906.9
27.5°	759.9
30°	624.6
32.5°	506.2
35°	403.4
37.5°	314.9
40°	242.0
42.5°	186.1
45°	136.6
47.5°	100.2
50°	65.1
52.5°	32.5
55°	22.1
57.5°	16.9
60°	11.7
62.5°	7.8
65°	3.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)