

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: HALO

Report Number: P642782

Luminaire Tested: ML5615LSNFL259FS1E - 593SNB - 1500LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642782
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 593SNB - 1500LM - 3000K
Description: ML56 RR, 25D TIR OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1610.6 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642782
CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1500LM - 3000K

Luminous Intensity Polar Plot

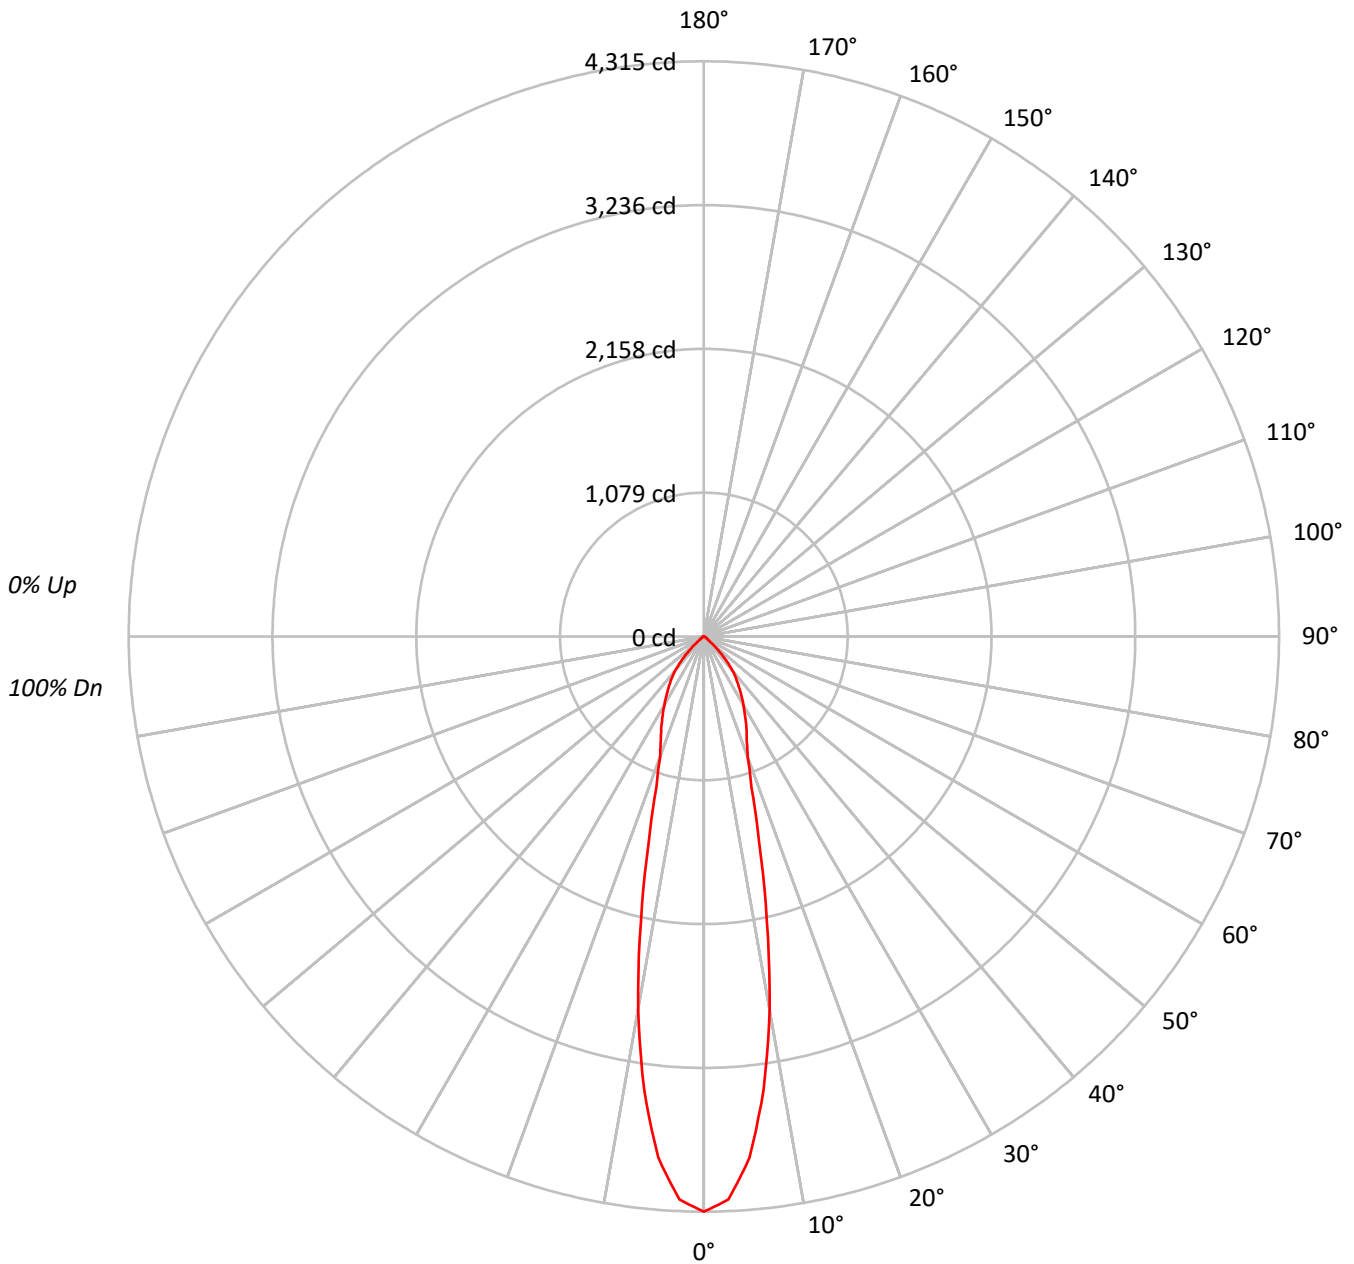



TEST NUMBER: P642782

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1500LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88																			
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	83																			
4	99	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77																			
5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	80	77	74	73																			
6	90	82	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69																			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	66	65																			
8	82	73	68	64	81	73	68	64	72	67	64	71	67	63	70	66	63	62																			
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59																			
10	76	67	61	58	75	66	61	58	66	61	58	65	61	58	64	60	57	56																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	340622
5°	311003
10°	227426
15°	130573
20°	80479
25°	65753
30°	54081
35°	43925
40°	34615
45°	21066
50°	6681
55°	3523
60°	2526
65°	1494
70°	739
75°	488
80°	727
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 21066 cd/sqm



TEST NUMBER: P642782

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1500LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	339.1	21.1
10°-20°	458.7	28.5
20°-30°	347.2	21.6
30°-40°	285.3	17.7
40°-50°	143.5	8.9
50°-60°	25.6	1.6
60°-70°	8.3	0.5
70°-80°	2.3	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1145.0	71.1
0°-40°	1430.3	88.8
0°-60°	1599.3	99.3
0°-90°	1610.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1610.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4315	
5°	3925	339
15°	1598	459
25°	755	347
35°	456	285
45°	189	143
55°	26	26
65°	8	8
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P642782

CATALOG NUMBER: ML5615LSNFL259FS1E - 593SNB - 1500LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	4314.9
2.5°	4228.6
5°	3924.7
7.5°	3430.5
10°	2837.2
12.5°	2183.1
15°	1597.7
17.5°	1186.7
20°	958.0
22.5°	841.2
25°	754.9
27.5°	670.1
30°	593.3
32.5°	521.4
35°	455.8
37.5°	395.0
40°	335.9
42.5°	257.5
45°	188.7
47.5°	115.2
50°	54.4
52.5°	33.6
55°	25.6
57.5°	20.8
60°	16.0
62.5°	11.2
65°	8.0
67.5°	4.8
70°	3.2
72.5°	3.2
75°	1.6
77.5°	1.6
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)