

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643159

Luminaire Tested: ML5615LSVWFL759FS1E - 593WB - 1500LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643159
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-74)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 593WB - 1500LM - 4000K
Description: ML56 RR, 75D TIR OPTIC, 5" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1902.0 lumens
Efficiency: N/A
Efficacy: 111.2 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643159

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1500LM - 4000K

Luminous Intensity Polar Plot

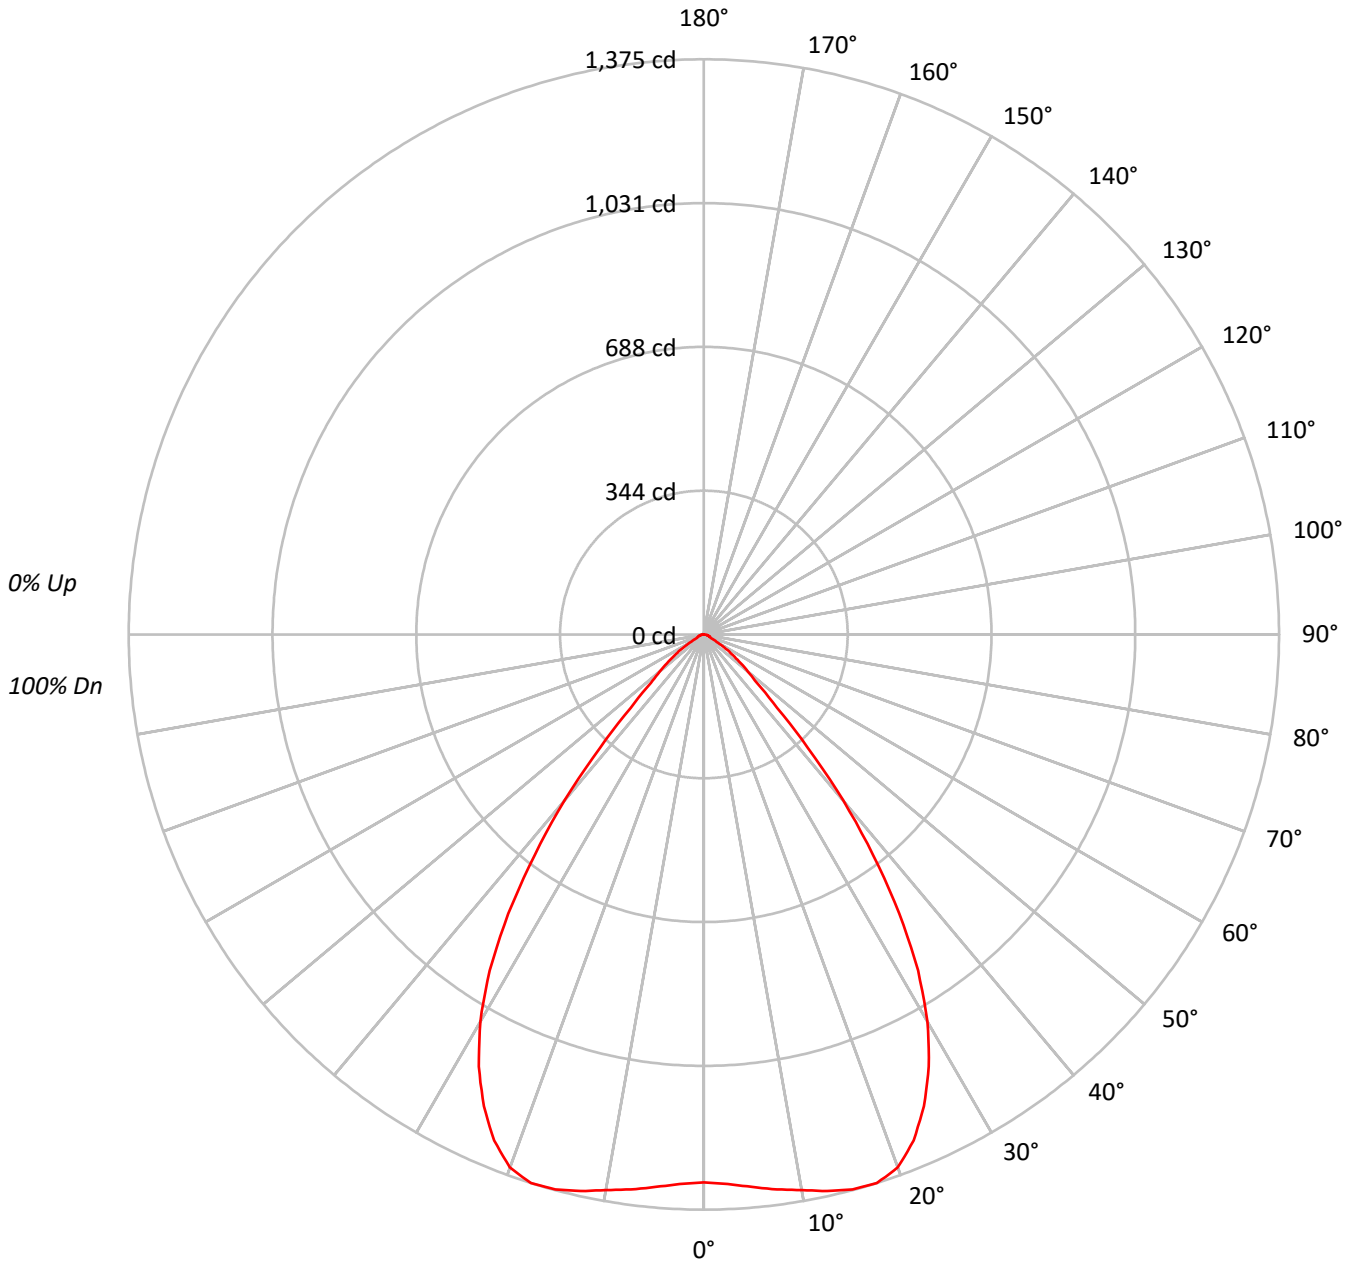



TEST NUMBER: P643159

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1500LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	85	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	59	59	59	59
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	62	56	52	61	55	51	60	55	51	50	50	50	50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	48	46	46	46	46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	103389
5°	105044
10°	108102
15°	112242
20°	113889
25°	108381
30°	97470
35°	78522
40°	53370
45°	27631
50°	16936
55°	11189
60°	5589
65°	3306
70°	3254
75°	3233
80°	3228
85°	3170

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27631 cd/sqm



TEST NUMBER: P643159

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1500LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.3	6.7
10°-20°	387.4	20.4
20°-30°	566.7	29.8
30°-40°	499.7	26.3
40°-50°	211.7	11.1
50°-60°	73.7	3.9
60°-70°	20.5	1.1
70°-80°	11.2	0.6
80°-90°	3.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1081.4	56.9
0°-40°	1581.1	83.1
0°-60°	1866.5	98.1
0°-90°	1902.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1902.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1310	
5°	1326	127
15°	1373	387
25°	1244	567
35°	815	500
45°	248	212
55°	81	74
65°	18	20
75°	11	11
85°	4	4
90°	0	



TEST NUMBER: P643159

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1500LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1309.7
2.5°	1315.0
5°	1325.6
7.5°	1338.0
10°	1348.6
12.5°	1362.7
15°	1373.4
17.5°	1375.1
20°	1355.7
22.5°	1309.7
25°	1244.3
27.5°	1164.8
30°	1069.3
32.5°	952.7
35°	814.8
37.5°	664.6
40°	517.9
42.5°	367.6
45°	247.5
47.5°	171.4
50°	137.9
52.5°	106.1
55°	81.3
57.5°	58.3
60°	35.4
62.5°	24.7
65°	17.7
67.5°	15.9
70°	14.1
72.5°	12.4
75°	10.6
77.5°	8.8
80°	7.1
82.5°	5.3
85°	3.5
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)