

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643263

Luminaire Tested: ML5615LSVWFL759FS1E - 692SC - 1500LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643263
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-83)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 692SC - 1500LM - 3500K
Description: ML56 RR, 75D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1797.3 lumens
Efficiency: N/A
Efficacy: 105.1 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.01
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643263

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692SC - 1500LM - 3500K

Luminous Intensity Polar Plot

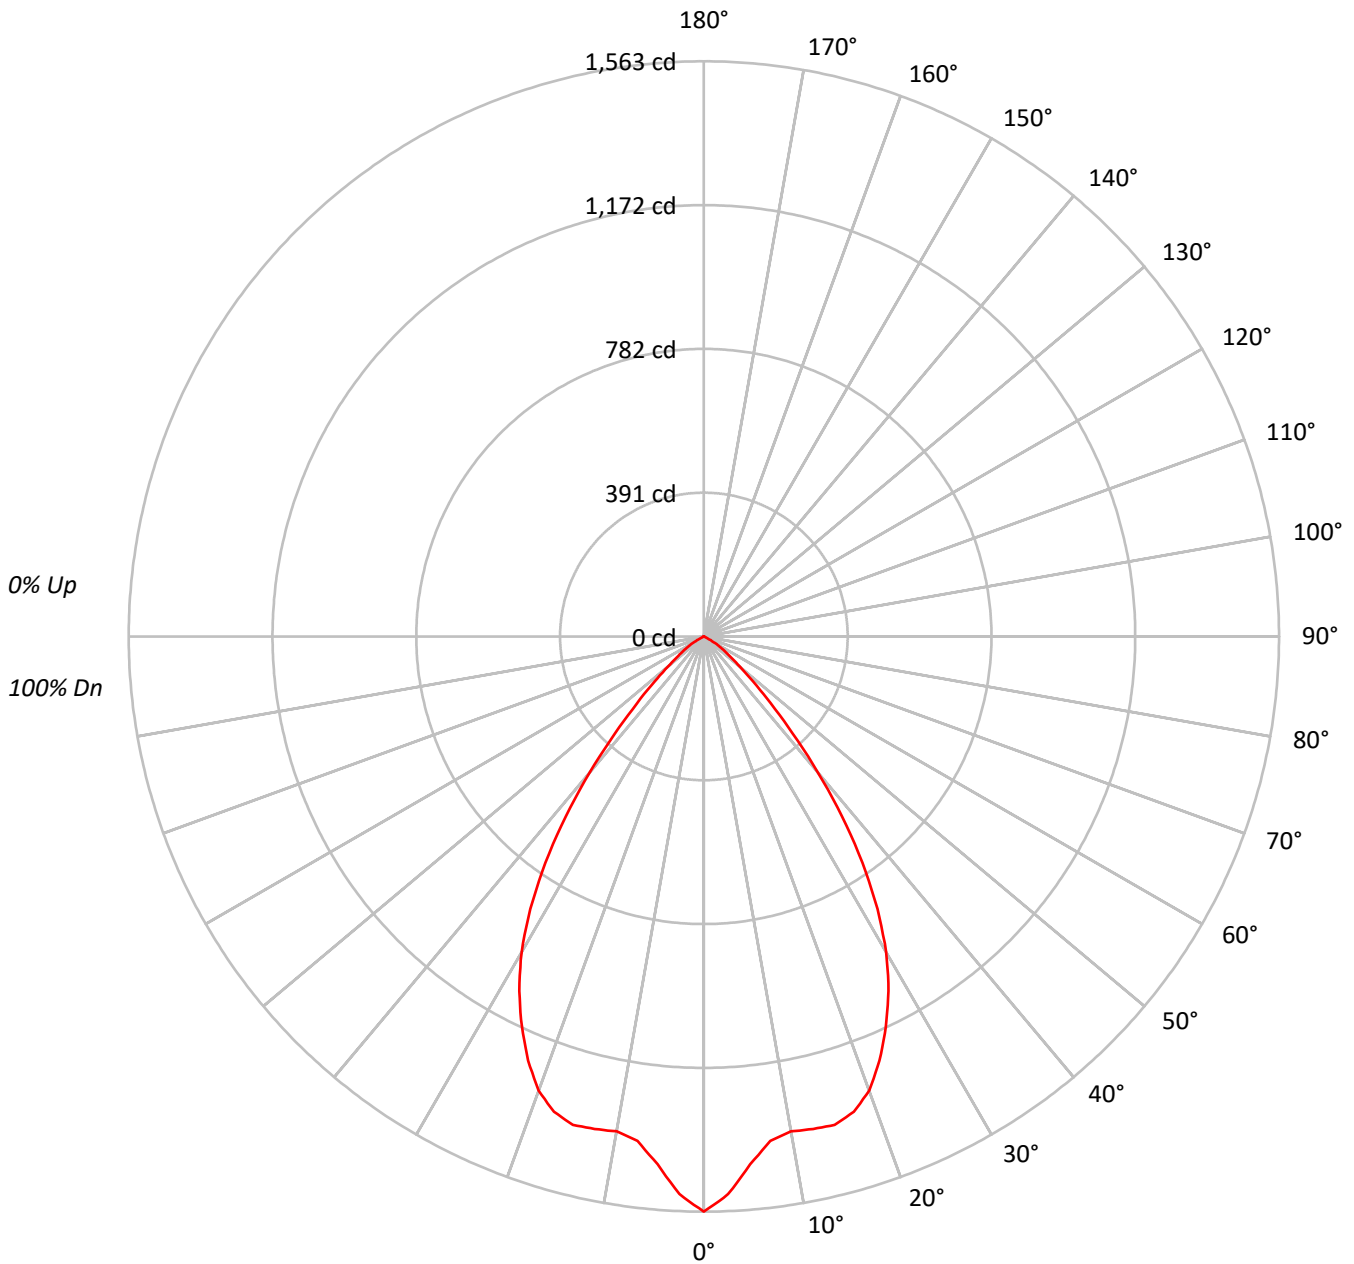



TEST NUMBER: P643263

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692SC - 1500LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	94	88	84	99	92	87	83	89	85	82	87	83	80	85	82	79	78	78	78	78
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	67	74	70	67	65	65	65	65
6	84	74	68	63	83	74	67	63	72	66	62	70	66	62	69	65	61	60	60	60	60
7	79	69	63	58	78	68	62	58	67	62	57	66	61	57	65	60	57	55	55	55	55
8	75	65	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	49	59	53	49	58	53	49	57	52	49	47	47	47	47
10	67	57	50	46	66	56	50	46	55	50	46	54	49	46	54	49	46	44	44	44	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	85678
5°	79221
10°	76023
15°	77974
20°	76604
25°	70776
30°	62731
35°	50259
40°	34457
45°	19878
50°	10789
55°	6442
60°	3421
65°	856
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19878 cd/sqm



TEST NUMBER: P643263

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692SC - 1500LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.1	7.5
10°-20°	384.7	21.4
20°-30°	534.4	29.7
30°-40°	461.9	25.7
40°-50°	208.8	11.6
50°-60°	63.0	3.5
60°-70°	9.4	0.5
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1054.2	58.7
0°-40°	1516.1	84.4
0°-60°	1787.9	99.5
0°-90°	1797.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1797.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1563	
5°	1440	135
15°	1374	385
25°	1170	534
35°	751	462
45°	256	209
55°	67	63
65°	7	9
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P643263

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692SC - 1500LM - 3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1562.9
2.5°	1516.9
5°	1439.6
7.5°	1382.1
10°	1365.7
12.5°	1370.6
15°	1373.9
17.5°	1354.2
20°	1313.1
22.5°	1247.3
25°	1170.1
27.5°	1086.3
30°	991.0
32.5°	877.6
35°	751.0
37.5°	616.3
40°	481.5
42.5°	356.6
45°	256.4
47.5°	180.8
50°	126.5
52.5°	90.4
55°	67.4
57.5°	47.7
60°	31.2
62.5°	14.8
65°	6.6
67.5°	1.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)