

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643858

Luminaire Tested: ML5615LSWFL559FS1E - 594SNB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643858
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-56)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 594SNB - 1200LM - 3500K
Description: ML56 RR, 55D TIR OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1522.0 lumens
Efficiency: N/A
Efficacy: 113.6 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.88
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643858
CATALOG NUMBER: ML5615LSWFL559FS1E - 594SNB - 1200LM - 3500K

Luminous Intensity Polar Plot

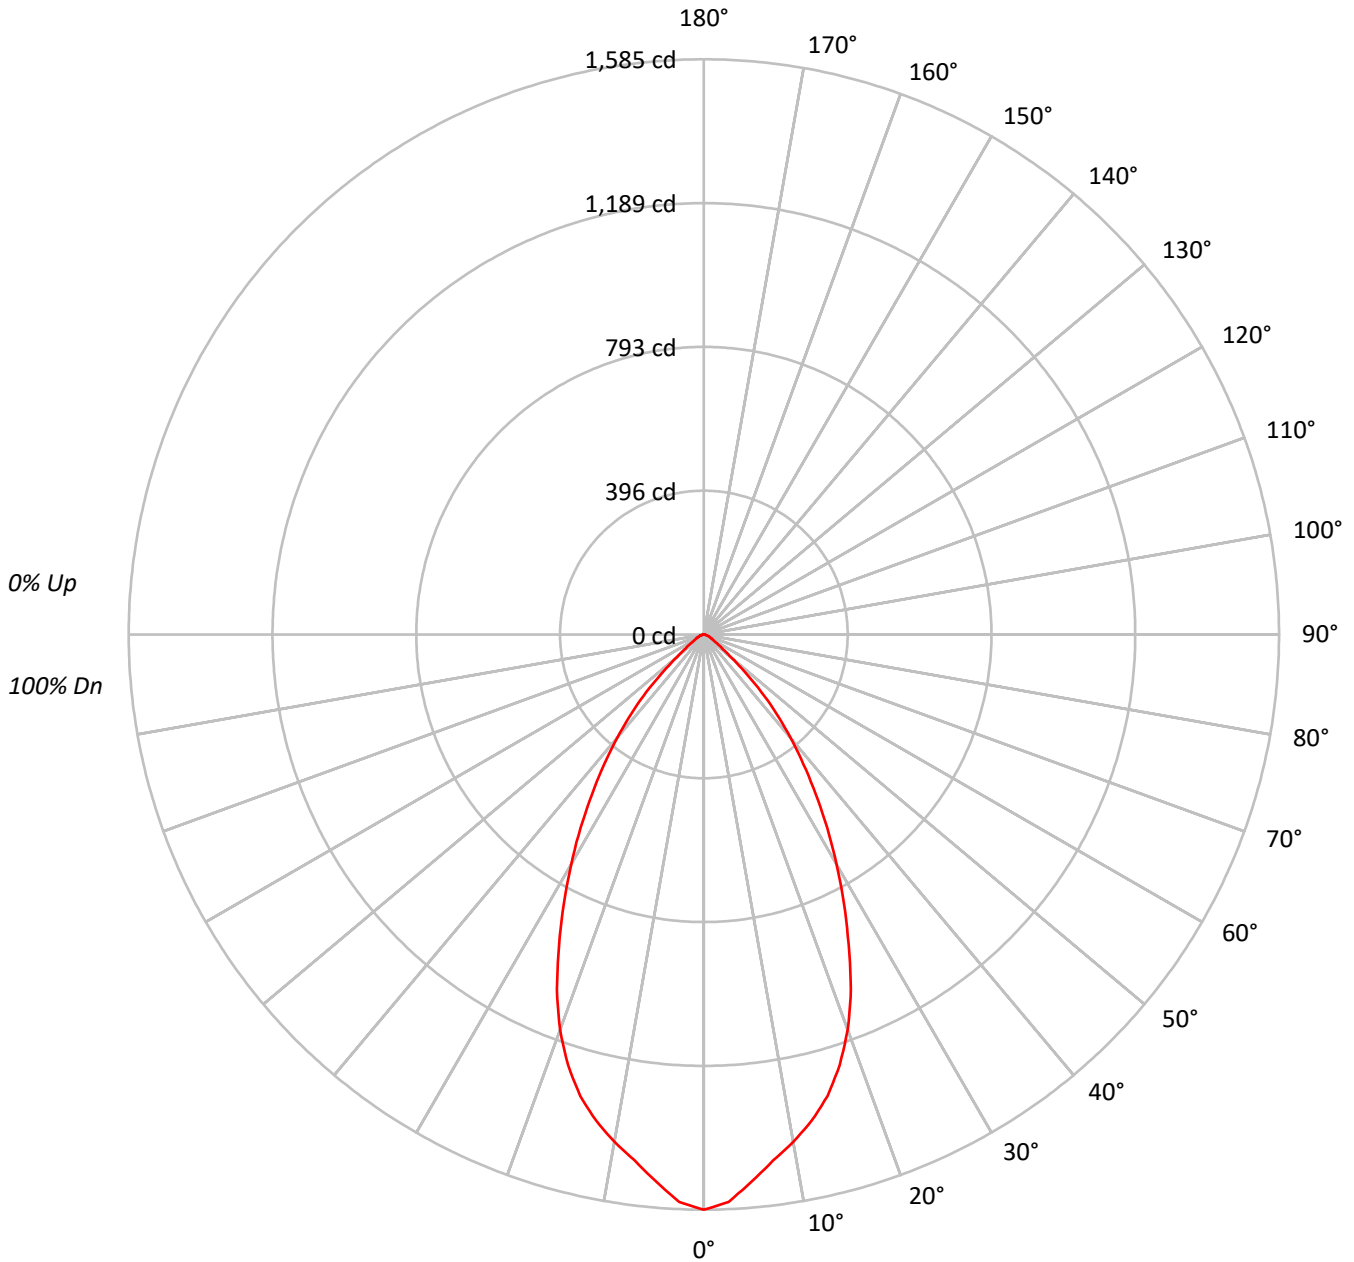



TEST NUMBER: P643858

CATALOG NUMBER: ML5615LSWFL559FS1E - 594\$NB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92			92
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85			85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72
5	90	81	74	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66
6	85	75	69	64	83	74	68	64	73	68	64	71	67	63	70	66	63	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53			53
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49			49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	47	46			46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	125121
5°	119878
10°	113769
15°	107584
20°	97339
25°	82180
30°	66633
35°	51769
40°	38283
45°	25063
50°	11986
55°	6441
60°	4215
65°	3493
70°	3093
75°	2044
80°	1227
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25063 cd/sqm



TEST NUMBER: P643858

CATALOG NUMBER: ML5615LSWFL559FS1E - 594\$NB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.5	9.3
10°-20°	366.3	24.1
20°-30°	431.8	28.4
30°-40°	336.5	22.1
40°-50°	172.1	11.3
50°-60°	46.6	3.1
60°-70°	19.1	1.3
70°-80°	7.4	0.5
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	939.6	61.7
0°-40°	1276.1	83.8
0°-60°	1494.8	98.2
0°-90°	1522.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1522.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1585	
5°	1513	141
15°	1316	366
25°	944	432
35°	537	337
45°	224	172
55°	47	47
65°	19	19
75°	7	7
85°	0	1
90°	0	



TEST NUMBER: P643858

CATALOG NUMBER: ML5615LSWFL559FS1E - 594\$NB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1585.0
2.5°	1564.9
5°	1512.8
7.5°	1462.0
10°	1419.3
12.5°	1372.5
15°	1316.4
17.5°	1244.2
20°	1158.7
22.5°	1058.4
25°	943.5
27.5°	835.3
30°	731.0
32.5°	632.1
35°	537.2
37.5°	450.4
40°	371.5
42.5°	295.3
45°	224.5
47.5°	149.7
50°	97.6
52.5°	66.8
55°	46.8
57.5°	34.7
60°	26.7
62.5°	22.7
65°	18.7
67.5°	16.0
70°	13.4
72.5°	9.4
75°	6.7
77.5°	4.0
80°	2.7
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)