

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P644053

Luminaire Tested: ML5615LSWFL559FS1E - 694WB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P644053
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-67)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 694WB - 1200LM - 3500K
Description: ML56 RR, 55D TIR OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1519.4 lumens
Efficiency: N/A
Efficacy: 113.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P644053
CATALOG NUMBER: ML5615LSWFL559FS1E - 694WB - 1200LM - 3500K

Luminous Intensity Polar Plot

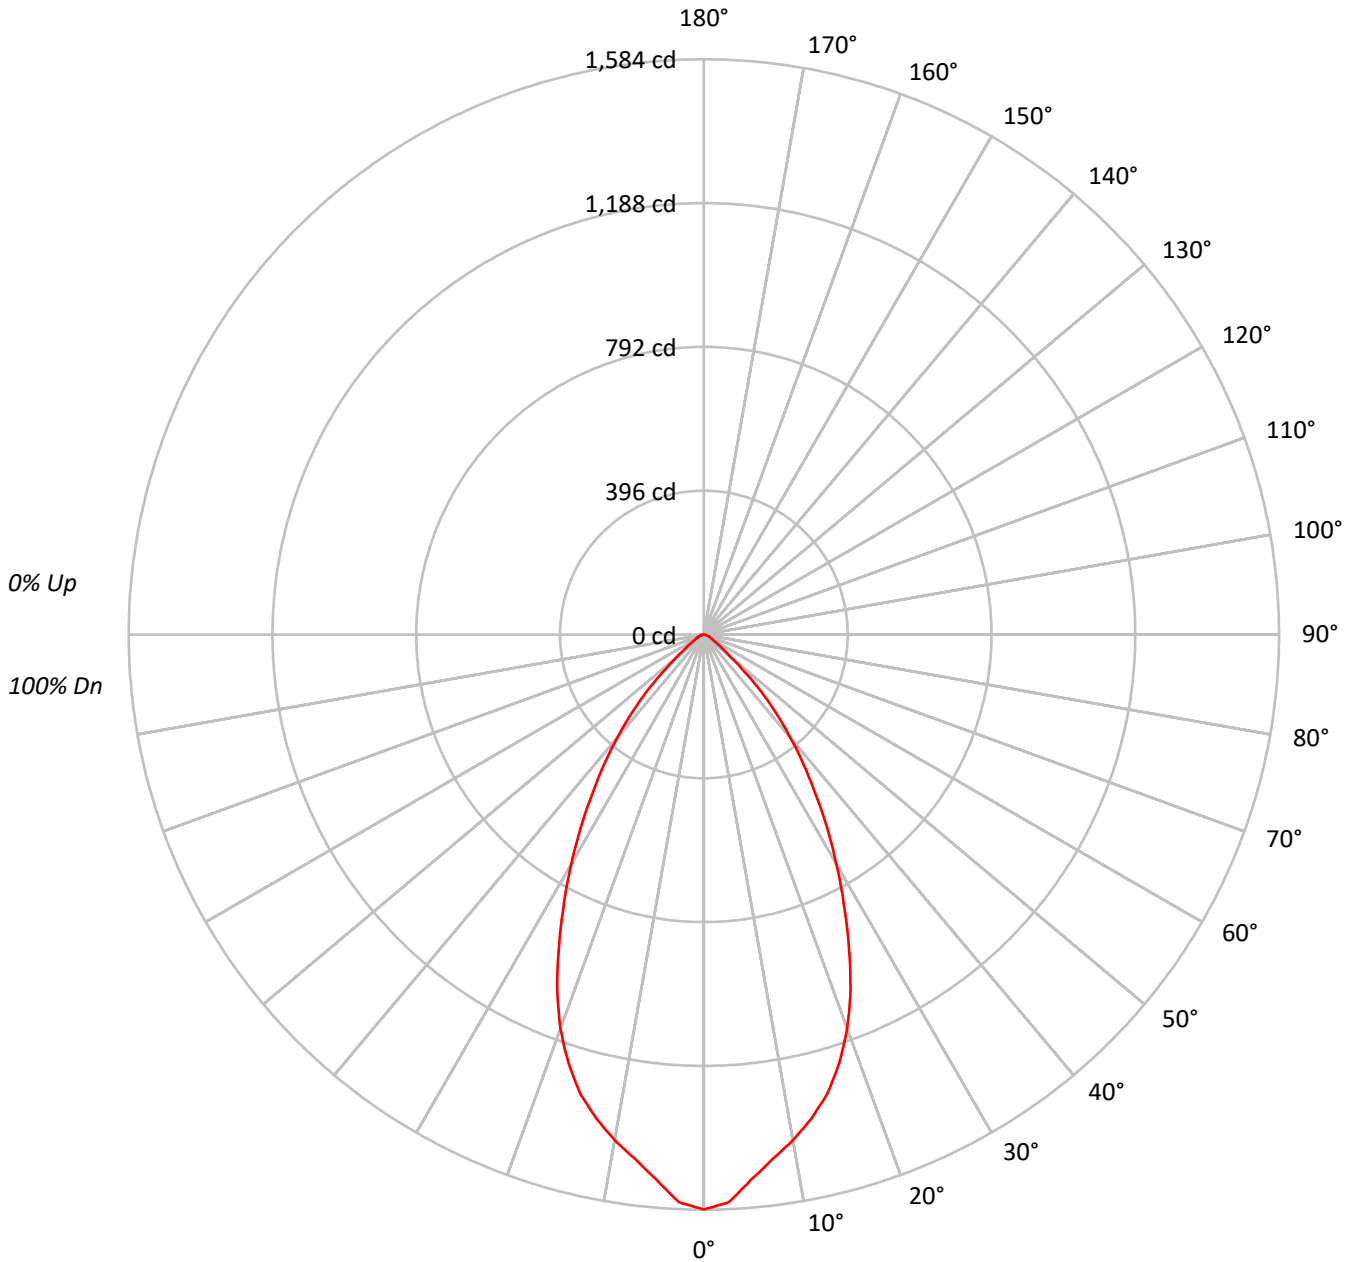



TEST NUMBER: P644053

CATALOG NUMBER: ML5615LSWFL559FS1E - 694WB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92			92																
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85			85																
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	81	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	63	61			61																
7	80	70	64	59	79	70	63	59	68	63	59	67	62	58	66	61	58	57			57																
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53			53																
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	51	48	56	51	48	55	51	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	86813
5°	82880
10°	78700
15°	74405
20°	67358
25°	57070
30°	46184
35°	35864
40°	26492
45°	17405
50°	8435
55°	4473
60°	3081
65°	2426
70°	2148
75°	1419
80°	852
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17405 cd/sqm



TEST NUMBER: P644053

CATALOG NUMBER: ML5615LSWFL559FS1E - 694WB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.0	9.3
10°-20°	364.8	24.0
20°-30°	431.0	28.4
30°-40°	336.1	22.1
40°-50°	171.8	11.3
50°-60°	46.9	3.1
60°-70°	19.3	1.3
70°-80°	7.8	0.5
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	936.8	61.7
0°-40°	1272.9	83.8
0°-60°	1491.6	98.2
0°-90°	1519.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1519.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1584	
5°	1506	141
15°	1311	365
25°	944	431
35°	536	336
45°	224	172
55°	47	47
65°	19	19
75°	7	8
85°	0	1
90°	0	



TEST NUMBER: P644053

CATALOG NUMBER: ML5615LSWFL559FS1E - 694WB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1583.6
2.5°	1564.9
5°	1506.1
7.5°	1456.6
10°	1413.8
12.5°	1365.7
15°	1311.0
17.5°	1238.8
20°	1154.6
22.5°	1055.7
25°	943.5
27.5°	833.9
30°	729.6
32.5°	632.1
35°	535.9
37.5°	450.3
40°	370.2
42.5°	295.3
45°	224.5
47.5°	148.3
50°	98.9
52.5°	66.8
55°	46.8
57.5°	34.7
60°	28.1
62.5°	22.7
65°	18.7
67.5°	16.0
70°	13.4
72.5°	9.4
75°	6.7
77.5°	5.3
80°	2.7
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)