

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220343

Luminaire Tested: **9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220343  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29413)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV  
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, SPOT OPTIC, BLACK HOUSING.  
Light Source: (1) 3500K CCT, 97 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 384.2 lumens  
Efficiency: N/A  
Efficacy: 38.4 lumens/watt  
Spacing Criteria (0/90/45): 0.25 / 0.25 / 0.25  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220343

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV

### Luminous Intensity Polar Plot

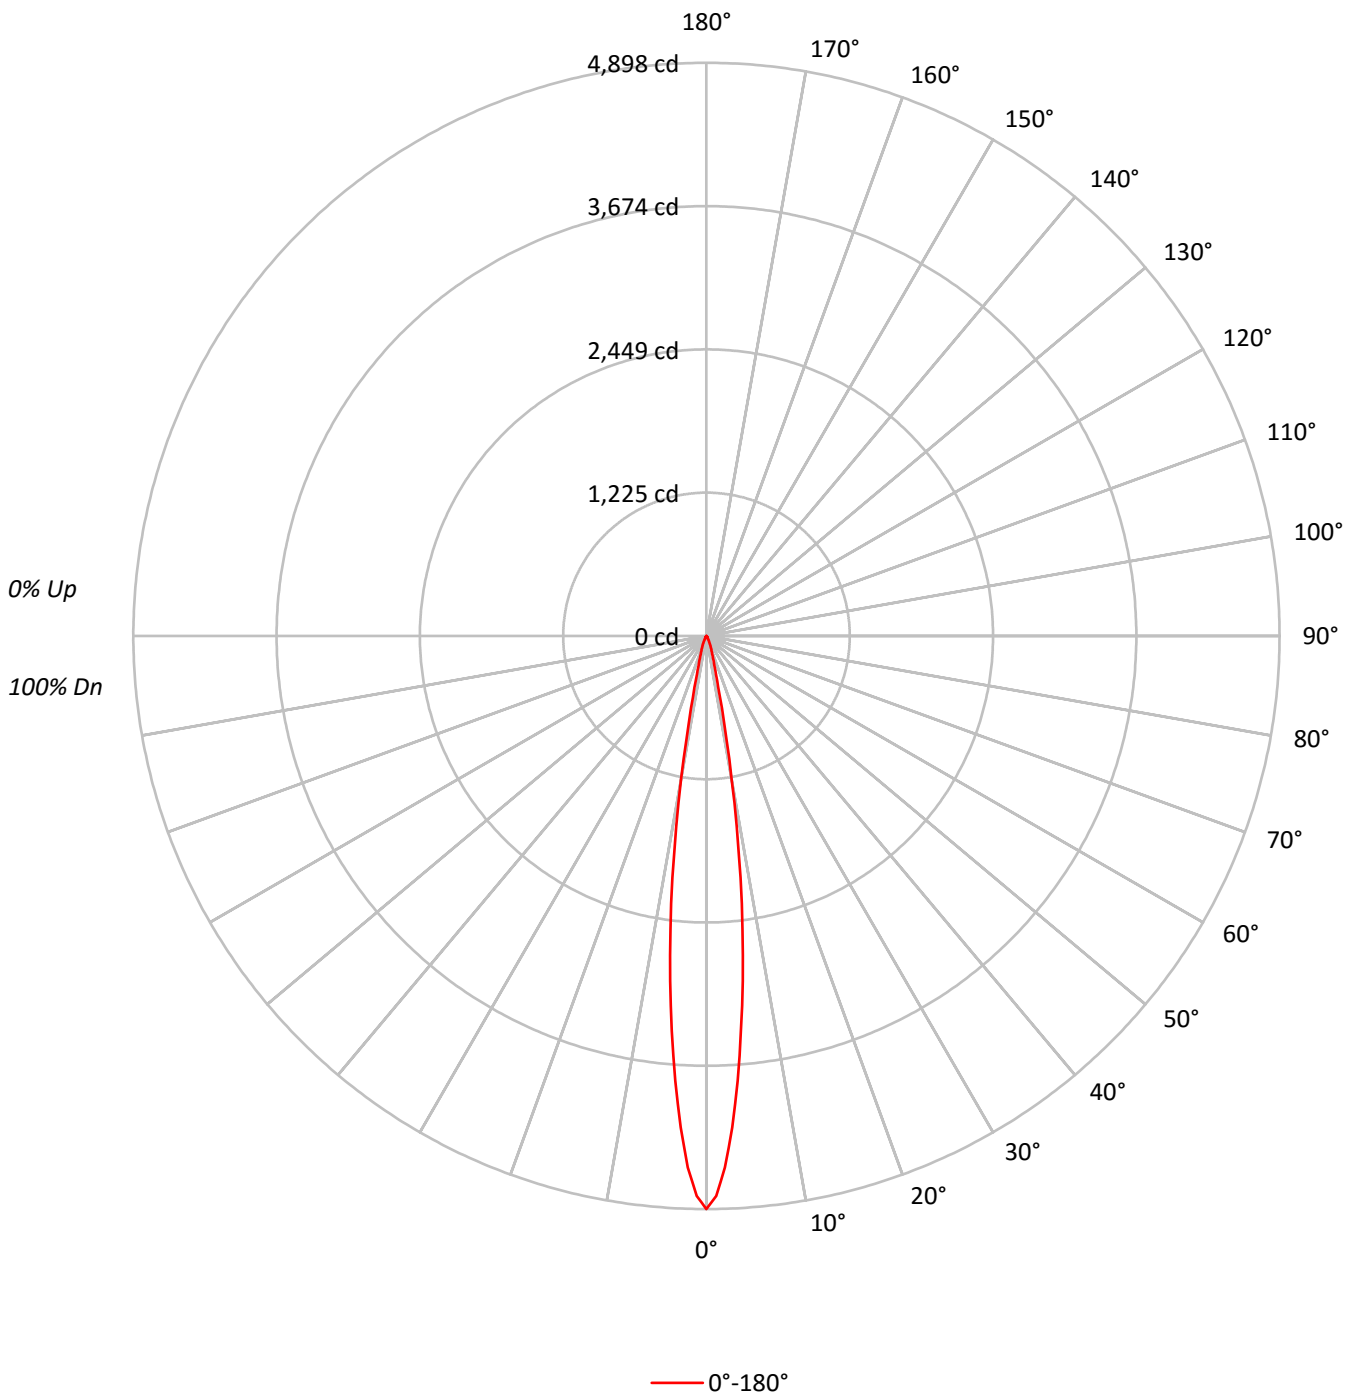



TEST NUMBER: P220343

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100
	1	116	114	113	111	114	112	111	109	108	107	106	104	104	103	101	100	100	98	98
	2	113	110	108	106	111	108	106	104	105	104	102	103	101	100	100	99	98	97	97
	3	110	107	104	102	109	105	103	101	103	101	99	101	99	98	99	97	96	95	95
	4	108	104	101	98	107	103	100	98	101	99	97	99	97	96	98	96	95	94	94
	5	106	101	98	96	105	101	98	96	99	97	95	98	96	94	96	95	93	92	92
	6	104	99	96	94	103	99	96	94	97	95	93	96	94	92	95	93	92	91	91
	7	102	97	94	92	101	97	94	92	96	93	91	95	93	91	94	92	91	90	90
	8	101	96	93	91	100	95	92	90	95	92	90	94	91	90	93	91	89	89	89
	9	99	94	91	89	98	94	91	89	93	91	89	93	90	89	92	90	88	88	88
	10	98	93	90	88	97	93	90	88	92	89	88	91	89	88	91	89	87	87	87

**AVERAGE LUMINANCE (cd/sqm):**

0°	
0°	2416524
5°	1678104
10°	623232
15°	133621
20°	59750
25°	29179
30°	9742
35°	4397
40°	2641
45°	1675
50°	1228
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P220343

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	253.7	66.0
10°-20°	97.5	25.4
20°-30°	25.6	6.7
30°-40°	5.2	1.4
40°-50°	1.8	0.5
50°-60°	0.3	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	376.8	98.1
0°-40°	382.1	99.4
0°-60°	384.2	100.0
0°-90°	384.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	384.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4898	
5°	3388	254
15°	262	98
25°	54	26
35°	7	5
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220343

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4897.9
1°	4785.8
2°	4545.3
3°	4206.5
4°	3811.6
5°	3388.3
6°	2964.9
7°	2529.4
8°	2084.1
9°	1647.8
10°	1244.0
11°	898.7
12°	633.0
13°	450.1
14°	334.8
15°	261.6
17.5°	160.9
20°	113.8
22.5°	82.9
25°	53.6
27.5°	30.9
30°	17.1
32.5°	10.6
35°	7.3
37.5°	5.7
40°	4.1
42.5°	2.4
45°	2.4
47.5°	1.6
50°	1.6
52.5°	0.8
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P220343

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3597-S-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

90° |  $\frac{0^\circ}{0.0}$

(END OF REPORT)