

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P833329

Luminaire Tested: **TTN-D1-830-U-RW-UPL1**

Issue Date: 5/15/2024

Test Information

Test Method: LM-79-08
Report Number: P833329
REPORT IS FROM IESNA LM-79-08 TEST DATA - UPLIGHT (G3-2308-121-4) AND
Test Lab: INNOVATION CENTER
Issue Date: 5/15/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: McGRAW-EDISON
Catalog Number: TTN-D1-830-U-RW-UPL1
Description: TOPTIER NANO LED PARKING GARAGE LUMINAIRE WITH UPLIGHT
3000K, 80 CRI LEDS AND RECTANGULAR DISTRIBUTION
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3232.8 lumens
Efficiency: N/A
Efficacy: 111.5 lumens/watt
Luminous Opening: Vertical Cylinder (Dia: 0.71' x H: 0.1')
IES Classification: Type II - Short
BUG Rating: B2 - U3 - G2


Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



REPORT NUMBER: P833329
 CATALOG NUMBER: TTN-D1-830-U-RW-UPL1

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

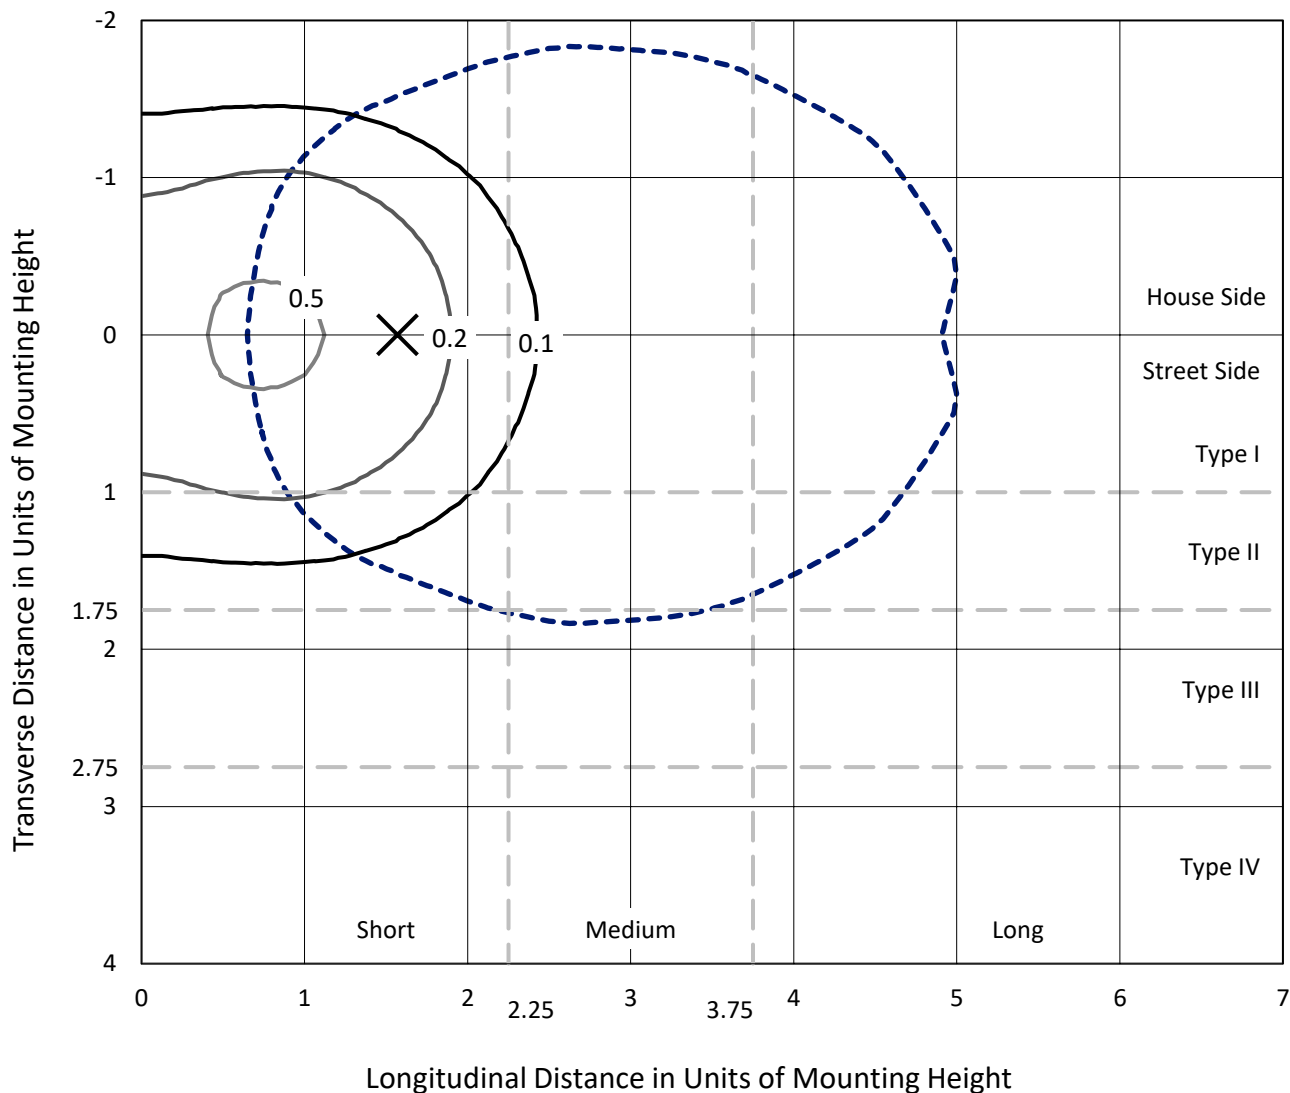

Based on 25 foot mounting height. Maximum calculated value = 0.6 fc
 Type II - Short - N/A

REPORT NUMBER: P833329
CATALOG NUMBER: TTN-D1-830-U-RW-UPL1

Luminous Intensity Polar Plot

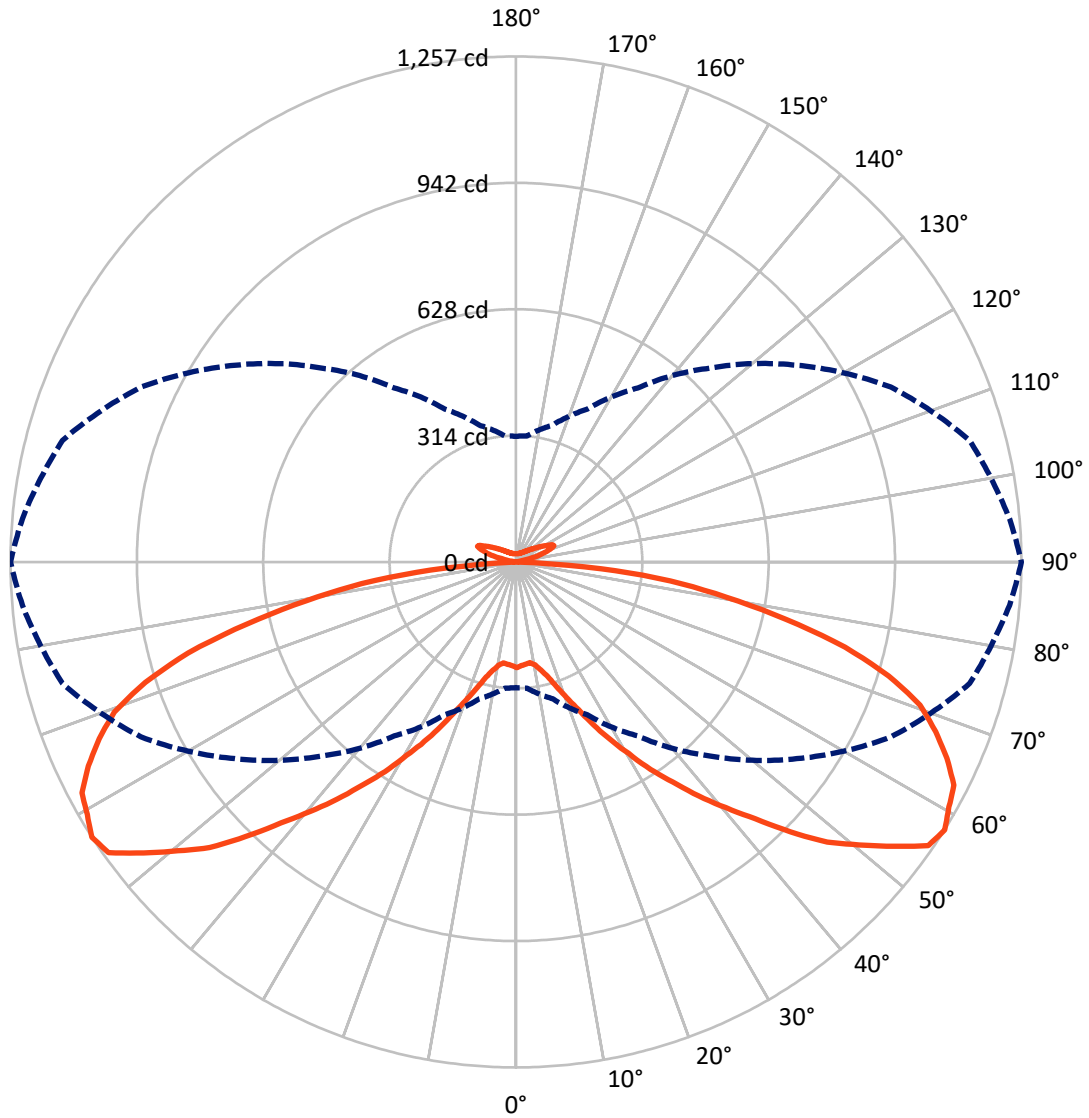

— Vertical Plane Through 90-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P833329
 CATALOG NUMBER: TTN-D1-830-U-RW-UPL1


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	1468.7	147.7	1616.4
	% Fixture	45.4	4.6	50.0
Street Side	Lumens	1468.7	147.7	1616.4
	% Fixture	45.4	4.6	50.0
Total	Lumens	2937.4	295.5	3232.8
	% Fixture	90.9	9.1	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.6	0.8
10°-20°	78.8	2.4
20°-30°	164.3	5.1
30°-40°	294.7	9.1
40°-50°	470.9	14.6
50°-60°	644.7	19.9
60°-70°	665.0	20.6
70°-80°	472.9	14.6
80°-90°	121.4	3.8
90°-100°	6.6	0.2
100°-110°	67.0	2.1
110°-120°	98.0	3.0
120°-130°	56.9	1.8
130°-140°	30.1	0.9
140°-150°	17.9	0.6
150°-160°	11.0	0.3
160°-170°	6.0	0.2
170°-180°	2.0	0.1
0°-90°	2937.4	90.9
0°-180°	3232.8	100.0

Coefficient of Utilization

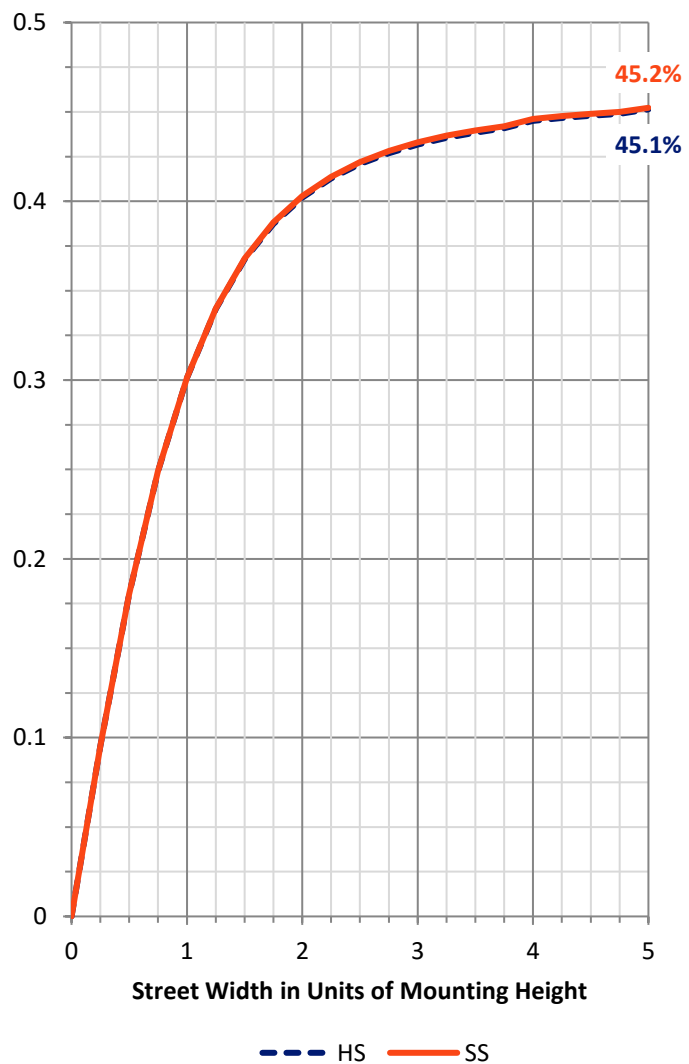


REPORT NUMBER: P833329
 CATALOG NUMBER: TTN-D1-830-U-RW-UPL1

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	133.9	4.1			
FM (30°-60°)	705.2	21.8			
FH (60°-80°)	569.0	17.6			G0/660
FVH (80°-90°)	60.7	1.9			G1/100
BL (0°-30°)	133.9	4.1	B1/500		
BM (30°-60°)	705.2	21.8	B1/1000		
BH (60°-80°)	569.0	17.6	B2/1000		G2/1000
BVH (80°-90°)	60.7	1.9			G1/100
UL (90°-100°)	6.6	0.2		U1/10	
UH (100°-180°)	288.9	8.9		U3/500	

BUG Rating: B2-U3-G2
 Type II Short

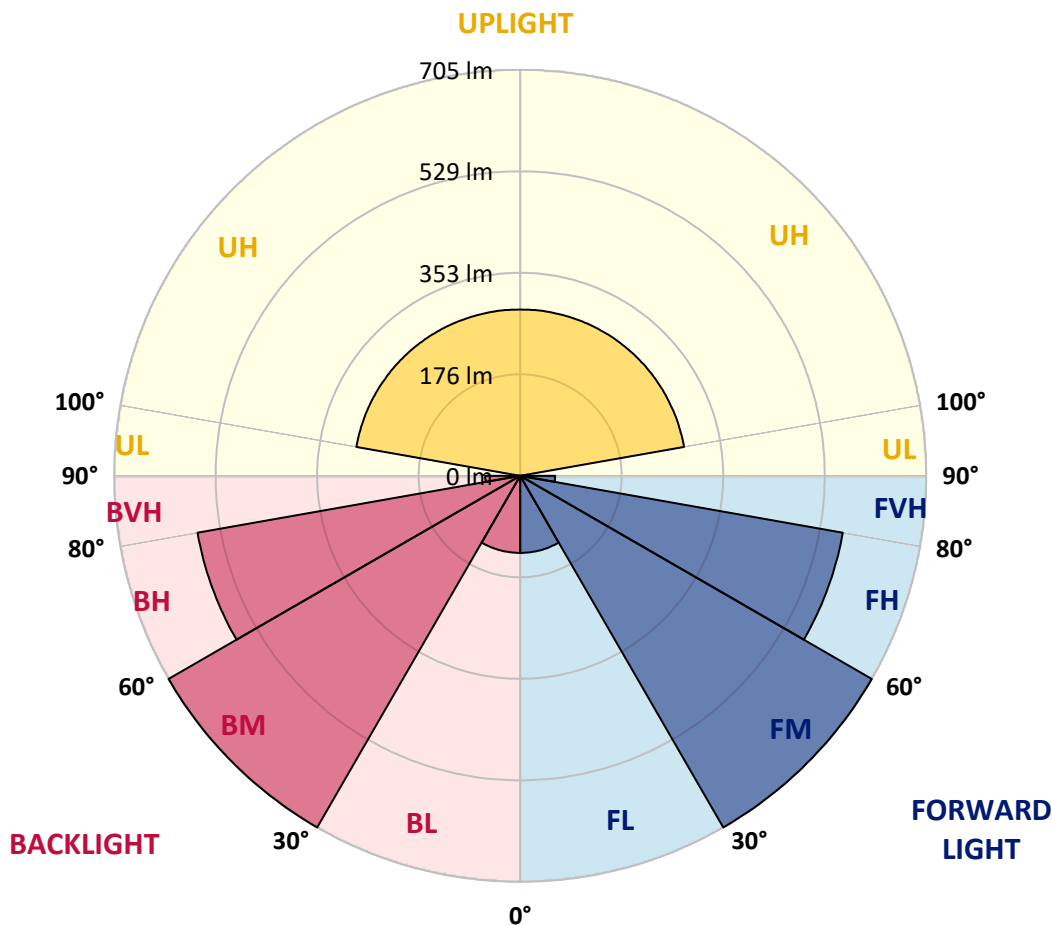



REPORT NUMBER: P833329
 CATALOG NUMBER: TTN-D1-830-U-RW-UPL1

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	262.7	262.7	262.7	262.7	262.7	262.7	262.7	262.7	262.7	262.7	262.7
2.5°	262.7	262.7	260.2	260.2	260.2	257.8	257.8	257.8	257.8	255.3	257.8
5°	262.7	262.7	262.7	262.7	260.2	257.8	257.8	257.8	255.3	255.3	255.3
7.5°	260.2	260.2	260.2	260.2	257.8	255.3	255.3	255.3	252.8	252.8	252.8
10°	257.8	260.2	257.8	257.8	255.3	255.3	257.8	257.8	260.2	260.2	260.2
12.5°	255.3	255.3	255.3	257.8	257.8	260.2	265.2	270.2	272.6	275.1	275.1
15°	255.3	255.3	257.8	260.2	265.2	270.2	277.6	285.0	290.0	294.9	294.9
17.5°	255.3	255.3	257.8	265.2	272.6	282.6	294.9	304.9	314.8	322.2	324.7
20°	255.3	255.3	260.2	270.2	285.0	299.9	317.3	332.1	347.0	359.4	359.4
22.5°	257.8	260.2	265.2	277.6	299.9	322.2	344.5	366.8	384.2	399.0	399.0
25°	262.7	262.7	270.2	290.0	317.3	347.0	379.2	406.5	428.8	448.6	448.6
27.5°	265.2	267.7	277.6	302.4	337.1	374.3	418.9	451.1	480.8	498.2	500.7
30°	270.2	272.6	287.5	312.3	354.4	401.5	453.6	498.2	530.4	547.8	552.7
32.5°	272.6	275.1	294.9	324.7	371.8	426.3	485.8	542.8	587.4	607.2	614.7
35°	280.1	282.6	302.4	337.1	391.6	453.6	523.0	589.9	641.9	666.7	671.7
37.5°	287.5	290.0	309.8	349.5	411.4	483.3	562.6	639.5	699.0	728.7	738.6
40°	292.5	294.9	317.3	364.3	433.7	515.5	607.2	691.5	758.4	795.6	803.0
42.5°	299.9	302.4	327.2	376.7	453.6	547.8	654.3	748.5	820.4	862.5	872.4
45°	307.3	309.8	337.1	391.6	475.9	582.5	701.4	815.4	897.2	946.8	956.7
47.5°	314.8	317.3	347.0	406.5	498.2	617.2	751.0	874.9	974.1	1021.2	1041.0
50°	317.3	322.2	352.0	416.4	513.1	646.9	793.1	934.4	1038.5	1100.5	1105.4
52.5°	319.7	324.7	356.9	423.8	525.5	669.2	827.8	984.0	1105.4	1179.8	1174.8
55°	322.2	322.2	356.9	423.8	530.4	684.1	852.6	1016.2	1150.0	1209.5	1244.2
57.5°	312.3	314.8	352.0	418.9	527.9	681.6	852.6	1028.6	1167.4	1231.8	1256.6
60°	299.9	304.9	339.6	406.5	518.0	674.2	847.7	1023.6	1174.8	1244.2	1236.8
62.5°	282.6	292.5	322.2	389.1	503.1	656.8	840.2	1011.2	1157.5	1229.4	1221.9
65°	262.7	272.6	299.9	371.8	470.9	614.7	800.6	986.5	1110.4	1192.2	1177.3
67.5°	242.9	250.3	277.6	342.0	433.7	570.1	748.5	931.9	1043.5	1132.7	1125.3
70°	220.6	223.1	250.3	307.3	396.6	525.5	699.0	855.1	984.0	1050.9	1065.8
72.5°	193.3	193.3	220.6	270.2	352.0	466.0	632.0	768.4	889.8	946.8	969.1
75°	158.6	161.1	183.4	228.0	294.9	399.0	537.8	676.6	778.3	837.7	845.2
77.5°	123.9	126.4	143.8	180.9	237.9	322.2	443.7	552.7	649.4	701.4	686.6
80°	89.2	91.7	104.1	131.4	176.0	240.4	342.0	438.7	508.1	550.2	530.4
82.5°	54.5	57.0	64.4	81.8	111.5	156.1	233.0	304.9	359.4	394.1	386.7
85°	27.3	27.3	32.2	37.2	47.1	69.4	111.5	153.7	195.8	220.6	213.2
87.5°	5.0	7.4	7.4	7.4	7.4	5.0	7.4	7.4	7.4	12.4	5.0
90°	2.5	2.5	3.0	3.0	3.0	3.0	3.0	3.0	3.0	2.5	2.5
92.5°	2.5	2.5	2.5	3.5	4.0	3.5	4.0	3.0	3.0	2.5	2.5
95°	3.0	3.0	3.5	4.5	5.6	6.1	6.1	3.5	3.5	3.0	3.0
97.5°	4.0	4.5	4.5	5.6	9.1	16.7	10.1	5.1	5.1	4.5	4.0
100°	6.6	7.1	7.1	12.6	26.8	35.9	25.8	13.1	9.6	7.1	7.1
102.5°	21.2	22.2	27.3	40.9	60.7	55.1	46.5	44.0	30.3	24.3	23.3
105°	54.1	53.6	57.6	68.2	84.9	83.4	76.8	69.8	60.2	55.6	55.6
107.5°	71.3	71.3	74.8	83.9	96.6	112.7	114.2	90.5	79.4	74.3	73.8
110°	80.4	80.4	83.4	91.0	107.7	130.4	129.4	111.7	98.1	91.5	90.5



REPORT NUMBER: P833329
 CATALOG NUMBER: TTN-D1-830-U-RW-UPL1

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
112.5°	82.4	82.9	86.9	98.6	116.8	126.9	122.3	115.3	109.2	104.1	103.1
115°	85.4	85.4	90.0	101.1	111.2	115.3	110.2	104.6	100.6	98.6	99.6
117.5°	84.4	85.9	86.9	93.0	99.6	102.6	100.1	92.5	89.5	88.5	86.9
120°	78.4	78.4	79.4	82.4	85.9	87.5	86.4	81.4	78.9	78.4	77.3
122.5°	69.8	70.3	69.8	71.3	73.8	75.3	74.3	70.3	69.3	69.3	68.2
125°	61.2	61.2	60.7	61.7	63.2	62.7	63.2	61.2	60.7	60.7	60.2
127.5°	55.1	54.6	53.6	54.1	54.6	54.6	55.1	53.1	53.6	54.1	53.6
130°	49.0	49.0	48.0	48.0	48.0	47.0	48.0	47.0	47.5	48.0	48.5
132.5°	43.5	43.5	42.0	41.5	41.5	41.5	42.0	41.5	42.5	43.5	43.5
135°	38.9	38.9	37.4	37.9	37.9	37.4	37.9	37.4	38.4	38.9	38.9
137.5°	35.4	35.4	34.4	34.4	34.4	33.9	34.4	34.4	34.9	35.9	36.4
140°	32.4	32.4	31.8	31.8	31.3	31.8	31.8	31.8	32.4	32.9	32.9
142.5°	30.8	30.3	29.8	29.3	29.8	29.8	29.8	29.3	29.8	30.8	30.8
145°	28.3	28.3	27.8	27.8	27.8	28.3	27.8	27.8	28.3	28.3	28.8
147.5°	26.8	26.8	26.3	26.8	26.8	26.8	26.8	26.3	26.8	26.8	27.3
150°	26.3	25.8	25.3	25.8	25.8	25.3	25.3	25.3	25.3	25.8	25.8
152.5°	24.8	24.8	24.3	24.8	24.3	24.3	24.3	24.3	24.3	24.8	25.3
155°	23.8	23.8	23.3	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8
157.5°	22.7	23.3	22.7	22.7	22.7	22.7	22.7	22.7	22.7	23.3	23.3
160°	22.2	22.2	22.2	22.2	21.7	21.7	21.7	22.2	22.2	22.2	22.7
162.5°	21.7	21.7	21.7	21.7	21.2	21.2	21.2	21.2	21.7	21.7	22.2
165°	21.7	21.2	21.2	21.2	20.7	20.7	20.7	20.7	21.2	21.7	21.2
167.5°	20.7	20.7	20.7	20.7	20.7	20.2	20.2	20.7	20.7	20.7	21.2
170°	20.7	20.7	20.2	20.2	20.2	20.2	20.2	20.2	20.2	20.2	20.7
172.5°	20.7	20.7	20.7	20.7	20.2	20.2	20.2	20.2	20.2	20.7	20.7
175°	20.7	20.7	20.7	20.7	20.2	20.2	20.2	20.7	20.7	20.7	20.2
177.5°	20.7	20.7	20.7	20.7	20.2	20.7	20.7	20.7	20.7	20.7	20.7
180°	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7

(END OF REPORT)