

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P642084

Luminaire Tested: GWS-SA6C-730-U-5MQ-W-GRSWH

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642084  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-6)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA6C-730-U-5MQ-W-GRSWH  
Description: GALLEON WALL SLIM LUMINAIRE. (6) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V MEDIUM OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH  
Light Source: (96) 3000K CCT, 70 CRI LEDS  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 22639.8 lumens  
Efficiency: N/A  
Efficacy: 119.7 lumens/watt  
Luminous Opening: Rectangular (W 2' x L: 1' x H: 0')  
IES Classification: Type V - Short  
BUG Rating: B4 - U0 - G1  
  
Input Watts (W): 189.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT




REPORT NUMBER: P642084

CATALOG NUMBER: GWS-SA6C-730-U-5MQ-W-GRSWH

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

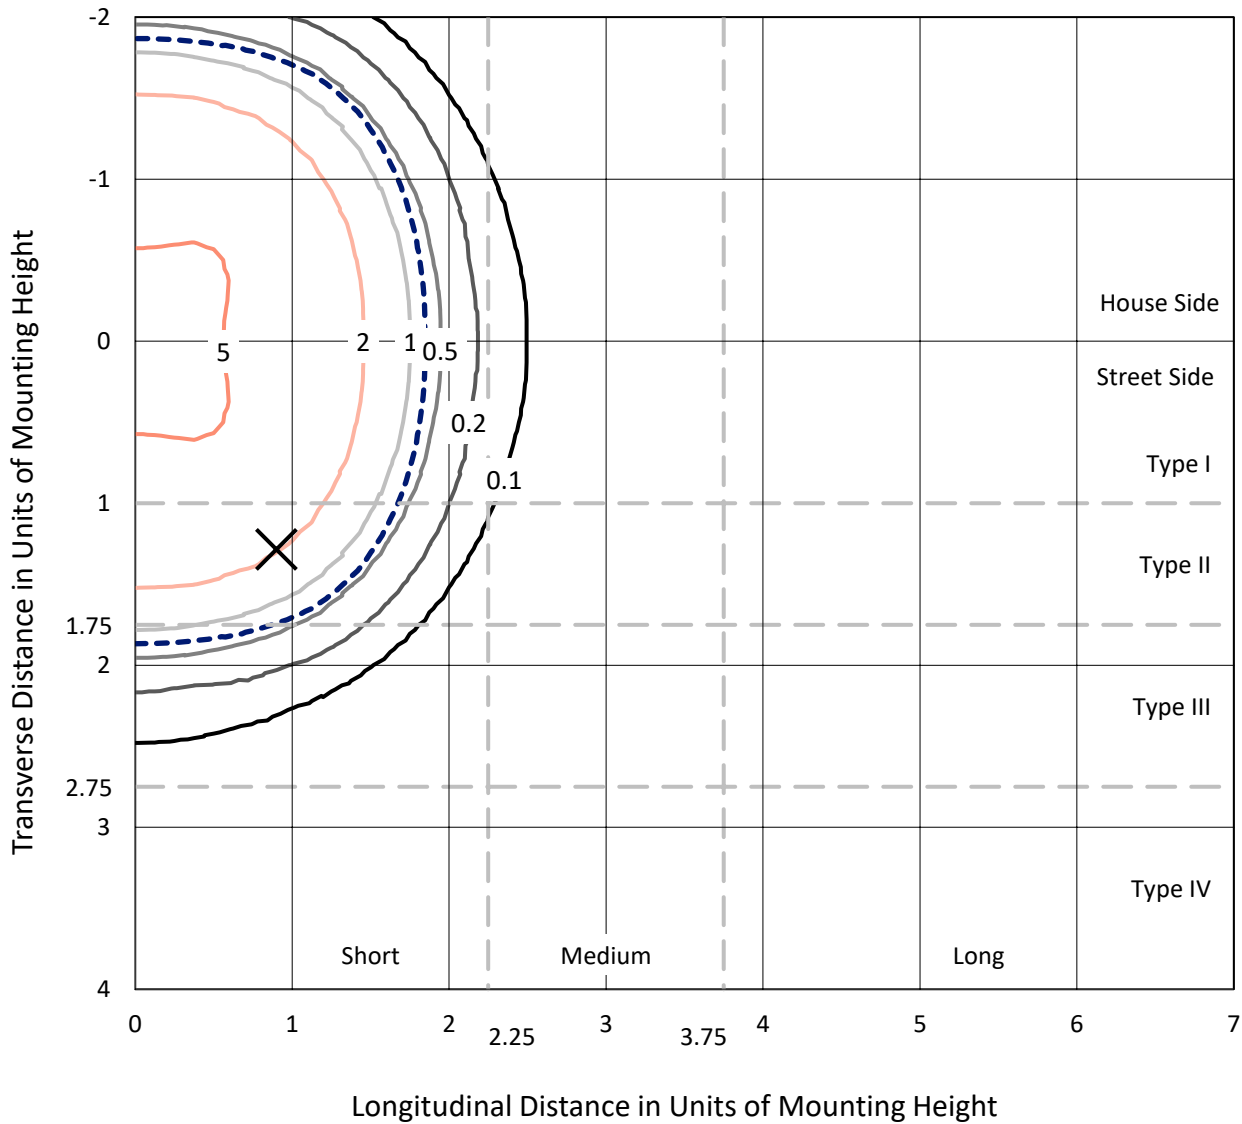

Based on 25 foot mounting height. Maximum calculated value = 6.9 fc  
 Type V - Short - N/A

REPORT NUMBER: P642084  
CATALOG NUMBER: GWS-SA6C-730-U-5MQ-W-GRSWH

### Luminous Intensity Polar Plot

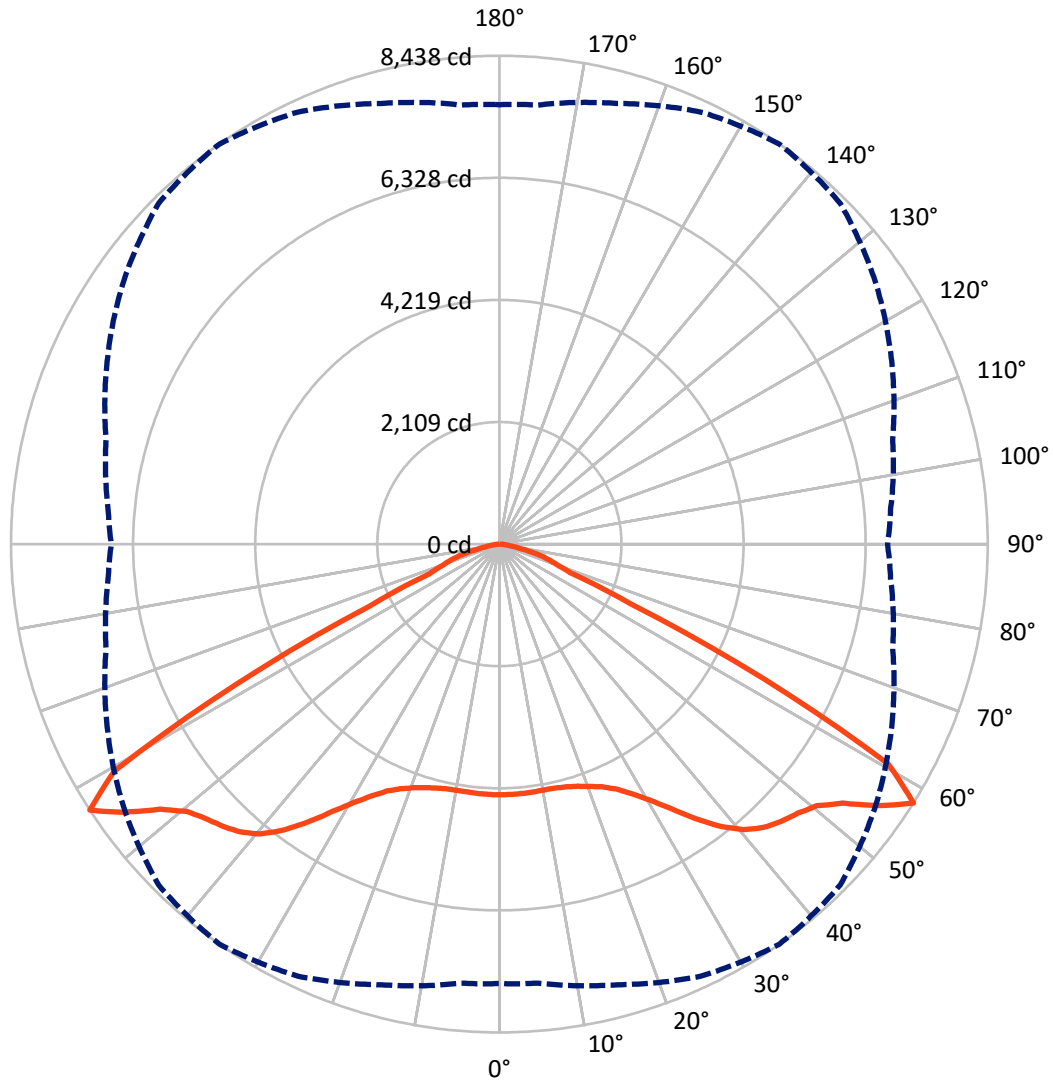

— Vertical Plane Through 35-Deg Lateral    - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P642084

CATALOG NUMBER: GWS-SA6C-730-U-5MQ-W-GRSWH

**FLUX DISTRIBUTION:**

|                    |           | Downward | Upward | Total   |
|--------------------|-----------|----------|--------|---------|
| <b>House Side</b>  | Lumens    | 11319.9  | 0.0    | 11319.9 |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Street Side</b> | Lumens    | 11319.9  | 0.0    | 11319.9 |
|                    | % Fixture | 50.0     | 0.0    | 50.0    |
| <b>Total</b>       | Lumens    | 22639.8  | 0.0    | 22639.8 |
|                    | % Fixture | 100.0    | 0.0    | 100.0   |

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 412.1   | 1.8       |
| 10°-20°   | 1229.5  | 5.4       |
| 20°-30°   | 2145.3  | 9.5       |
| 30°-40°   | 3517.8  | 15.5      |
| 40°-50°   | 5180.8  | 22.9      |
| 50°-60°   | 6611.7  | 29.2      |
| 60°-70°   | 2786.4  | 12.3      |
| 70°-80°   | 665.6   | 2.9       |
| 80°-90°   | 90.6    | 0.4       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-90°    | 22639.8 | 100.0     |
| 0°-180°   | 22639.8 | 100.0     |

**Coefficient of Utilization**



REPORT NUMBER: P642084


CATALOG NUMBER: GWS-SA6C-730-U-5MQ-W-GRSWH

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

| Zone           | Lumens | % Fixture | Zone Rating/Lumen Limit |      |         |
|----------------|--------|-----------|-------------------------|------|---------|
|                |        |           | B                       | U    | G       |
| FL (0°-30°)    | 1893.4 | 8.4       |                         |      |         |
| FM (30°-60°)   | 7655.1 | 33.8      |                         |      |         |
| FH (60°-80°)   | 1726.0 | 7.6       |                         |      | G1/1800 |
| FVH (80°-90°)  | 45.3   | 0.2       |                         |      | G1/100  |
| BL (0°-30°)    | 1893.4 | 8.4       | B3/2500                 |      |         |
| BM (30°-60°)   | 7655.1 | 33.8      | B4/8500                 |      |         |
| BH (60°-80°)   | 1726.0 | 7.6       | B3/2500                 |      | G1/1800 |
| BVH (80°-90°)  | 45.3   | 0.2       |                         |      | G1/100  |
| UL (90°-100°)  | 0.0    | 0.0       |                         | U0/0 |         |
| UH (100°-180°) | 0.0    | 0.0       |                         | U0/0 |         |

**BUG Rating: B4-U0-G1**

Type V Short

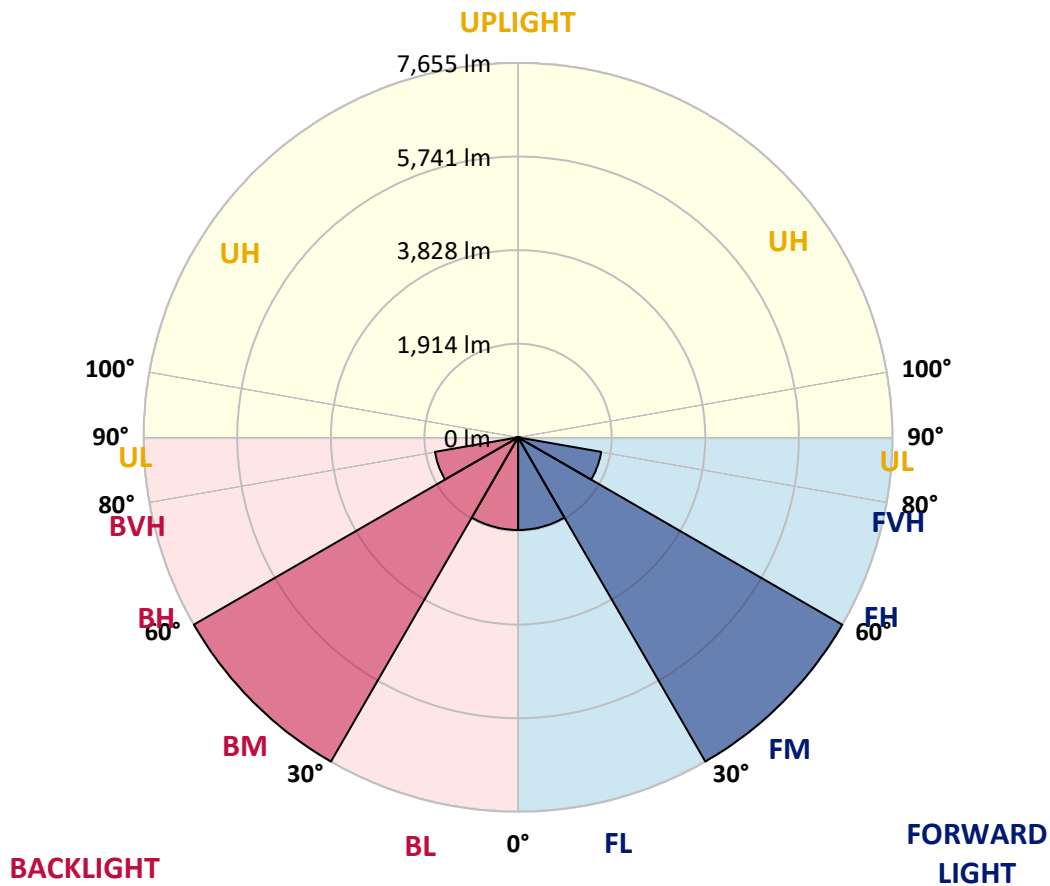



REPORT NUMBER: P642084

CATALOG NUMBER: GWS-SA6C-730-U-5MQ-W-GRSWH

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 5°     | 15°    | 25°    | 35°    | 45°    | 55°    | 65°    | 75°    | 85°    | 90°    |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0°    | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 | 4331.9 |
| 2.5°  | 4305.9 | 4305.9 | 4315.2 | 4324.5 | 4328.2 | 4344.8 | 4343.0 | 4337.4 | 4333.7 | 4322.6 | 4337.4 |
| 5°    | 4315.2 | 4315.2 | 4322.6 | 4328.2 | 4326.3 | 4339.3 | 4333.7 | 4324.5 | 4318.9 | 4307.8 | 4324.5 |
| 7.5°  | 4313.3 | 4313.3 | 4318.9 | 4324.5 | 4320.7 | 4331.9 | 4322.6 | 4309.6 | 4300.4 | 4289.2 | 4304.1 |
| 10°   | 4289.2 | 4292.9 | 4298.5 | 4311.5 | 4317.0 | 4333.7 | 4320.7 | 4300.4 | 4285.5 | 4272.6 | 4287.4 |
| 12.5° | 4285.5 | 4289.2 | 4296.6 | 4313.3 | 4322.6 | 4346.7 | 4330.0 | 4296.6 | 4274.4 | 4257.7 | 4272.6 |
| 15°   | 4302.2 | 4305.9 | 4317.0 | 4337.4 | 4352.3 | 4378.2 | 4354.1 | 4307.8 | 4276.3 | 4254.0 | 4267.0 |
| 17.5° | 4322.6 | 4328.2 | 4344.8 | 4374.5 | 4398.6 | 4426.4 | 4396.7 | 4341.1 | 4296.6 | 4267.0 | 4278.1 |
| 20°   | 4344.8 | 4352.3 | 4378.2 | 4422.7 | 4467.2 | 4502.4 | 4465.3 | 4391.2 | 4337.4 | 4298.5 | 4309.6 |
| 22.5° | 4383.8 | 4393.0 | 4426.4 | 4489.4 | 4556.2 | 4608.1 | 4561.7 | 4461.6 | 4391.2 | 4341.1 | 4350.4 |
| 25°   | 4463.5 | 4474.6 | 4517.2 | 4593.2 | 4687.8 | 4750.8 | 4685.9 | 4572.8 | 4474.6 | 4413.4 | 4422.7 |
| 27.5° | 4604.3 | 4609.9 | 4665.5 | 4765.6 | 4882.4 | 4954.7 | 4876.8 | 4743.4 | 4634.0 | 4563.6 | 4571.0 |
| 30°   | 4789.7 | 4806.4 | 4862.0 | 4993.6 | 5132.6 | 5229.0 | 5127.1 | 4969.5 | 4843.5 | 4758.2 | 4765.6 |
| 32.5° | 5015.8 | 5027.0 | 5110.4 | 5247.5 | 5447.7 | 5559.0 | 5419.9 | 5232.7 | 5080.7 | 4976.9 | 4984.3 |
| 35°   | 5312.4 | 5321.7 | 5401.4 | 5575.6 | 5818.5 | 5922.3 | 5762.8 | 5547.8 | 5371.7 | 5273.5 | 5301.3 |
| 37.5° | 5666.5 | 5683.1 | 5740.6 | 5913.0 | 6183.6 | 6285.6 | 6102.1 | 5901.9 | 5718.4 | 5627.5 | 5647.9 |
| 40°   | 6046.4 | 6044.6 | 6090.9 | 6242.9 | 6489.5 | 6552.5 | 6387.5 | 6228.1 | 6070.5 | 6011.2 | 6044.6 |
| 42.5° | 6372.7 | 6363.4 | 6396.8 | 6522.8 | 6693.4 | 6698.9 | 6589.6 | 6500.6 | 6389.4 | 6348.6 | 6380.1 |
| 45°   | 6600.7 | 6604.4 | 6654.4 | 6741.5 | 6828.7 | 6782.3 | 6749.0 | 6734.1 | 6647.0 | 6591.4 | 6597.0 |
| 47.5° | 6780.5 | 6795.3 | 6875.0 | 6934.3 | 6945.4 | 6867.6 | 6913.9 | 6936.2 | 6863.9 | 6778.6 | 6754.5 |
| 50°   | 6939.9 | 6964.0 | 7067.8 | 7130.8 | 7106.7 | 7008.5 | 7099.3 | 7132.7 | 6973.2 | 6810.1 | 6761.9 |
| 52.5° | 7229.0 | 7256.8 | 7382.9 | 7464.5 | 7436.6 | 7338.4 | 7423.7 | 7305.0 | 7036.3 | 6836.1 | 6774.9 |
| 55°   | 7690.6 | 7703.6 | 7857.4 | 7990.9 | 7977.9 | 7857.4 | 7788.8 | 7525.6 | 7199.4 | 6991.8 | 6934.3 |
| 57.5° | 7592.4 | 7614.6 | 7881.5 | 8237.4 | 8437.6 | 8328.2 | 7926.0 | 7477.4 | 7034.4 | 6784.2 | 6706.3 |
| 60°   | 5974.2 | 6027.9 | 6359.7 | 6986.2 | 7720.3 | 7718.4 | 6971.4 | 6274.4 | 5740.6 | 5408.8 | 5375.4 |
| 62.5° | 3488.5 | 3525.6 | 3827.7 | 4461.6 | 5119.6 | 5160.4 | 4635.9 | 4157.6 | 3690.5 | 3466.2 | 3358.7 |
| 65°   | 1651.6 | 1649.7 | 1770.2 | 2055.6 | 2500.5 | 2535.7 | 2378.2 | 2116.8 | 1840.6 | 1764.6 | 1744.2 |
| 67.5° | 1219.7 | 1219.7 | 1210.4 | 1230.8 | 1316.1 | 1334.6 | 1316.1 | 1273.4 | 1247.5 | 1264.2 | 1253.0 |
| 70°   | 1058.4 | 1060.3 | 1049.1 | 1043.6 | 1043.6 | 1038.0 | 1045.4 | 1062.1 | 1073.2 | 1095.5 | 1084.4 |
| 72.5° | 858.2  | 860.1  | 860.1  | 861.9  | 863.8  | 856.4  | 867.5  | 876.8  | 878.6  | 886.0  | 878.6  |
| 75°   | 609.8  | 613.5  | 624.7  | 633.9  | 641.3  | 641.3  | 645.1  | 646.9  | 639.5  | 648.8  | 633.9  |
| 77.5° | 335.5  | 339.2  | 359.6  | 376.3  | 393.0  | 394.8  | 400.4  | 404.1  | 400.4  | 407.8  | 396.7  |
| 80°   | 185.4  | 189.1  | 198.3  | 205.7  | 218.7  | 229.8  | 237.3  | 241.0  | 241.0  | 246.5  | 241.0  |
| 82.5° | 105.7  | 109.4  | 114.9  | 118.6  | 129.8  | 139.0  | 146.4  | 152.0  | 152.0  | 153.8  | 150.1  |
| 85°   | 50.0   | 50.0   | 53.8   | 57.5   | 63.0   | 66.7   | 76.0   | 81.6   | 81.6   | 85.3   | 81.6   |
| 87.5° | 7.4    | 9.3    | 11.1   | 11.1   | 14.8   | 18.5   | 22.2   | 24.1   | 27.8   | 29.7   | 29.7   |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



LM-79-2008: Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

McGRAW-EDISON

Report Number: SP1-1908-441-2-R4

Test Date: 10/03/2019

Luminaire Tested: SA1C-730-U-5WQ

Data in this report applies to families of products SA1C-730-U-5WQ .



**Test Information**

Test Method: LM-79-2008  
 Report Number: SP1-1908-441-2-R4  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Photometer: SP1 - 76IN SPHERE  
 Measurement Geometry: 4π  
 Issue Date: 10/28/2024  
 Manufacturer: COOPER LIGHTING SOLUTIONS  
 Product Line: McGRAW-EDISON  
 Catalog Number: **SA1C-730-U-5WQ**  
 Description: McGRAW EDISON ROADWAY AND AREA LUMINAIRE

\*\*\*THIS IS A REVISION OF SP1-1908-441-2-R3. TO UPDATE THE CATALOG INFORMATION.\*\*\*TESTED IN SITU. (1) 70 CRI, 3000K, 1050MA LIGHTSQUARE WITH 16 LEDS AND TYPE V WIDE OPTICS.

**Spectral Parameters**

|                           |        |           |      |      |       |
|---------------------------|--------|-----------|------|------|-------|
| CCT (K):                  | 2993   | CRI (Ra): | 71.8 | R9:  | -38.3 |
| CIE u':                   | 0.2508 | R1:       | 67.5 | R10: | 62.5  |
| CIE v':                   | 0.5215 | R2:       | 82.9 | R11: | 63.7  |
| Duv:                      | 0.0000 | R3:       | 94.7 | R12: | 57.8  |
| CIE x:                    | 0.4374 | R4:       | 67.7 | R13: | 70.4  |
| CIE y:                    | 0.4043 | R5:       | 67.9 | R14: | 97.3  |
| CIE z:                    | 0.1583 | R6:       | 77.6 |      |       |
| Peak Wavelength (nm):     | 593    | R7:       | 76.0 |      |       |
| Dominant Wavelength (nm): | 582    | R8:       | 40.5 |      |       |
| Purity:                   | 53     |           |      |      |       |
| Rf:                       | 75.7   |           |      |      |       |
| Rg:                       | 93.9   |           |      |      |       |



**Test Conditions**

Stabilization Time: 53M  
 Operation Time: 12H  
 Room Temperature (°C) / RH%: 25.0./44%  
 Sphere Temperature (°C): 25.7

REPORT NUMBER: SP1-1908-441-2-R4

| Measurement and Test Equipment |                       |                  |                      |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument                     | Identification Number | Calibration Date | Calibration Due Date |
| Photometer                     | IN0058                | 6/28/2019        | 12/28/2019           |
| Power Meter                    | IN0071                | 12/5/2018        | 12/5/2019            |
| AC Power Source                | IN0063                | 12/5/2018        | 12/5/2019            |
| DC Power Source                | IN0208                | 12/5/2018        | 12/5/2019            |
| Sphere Thermometer             | IN0085                | 12/5/2018        | 12/5/2019            |
| Room Thermometer               | IN0046                | 12/5/2018        | 12/5/2019            |

REPORT NUMBER: SP1-1908-441-2-R4

CIE 1931 Chromaticity Diagram



CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-1908-441-2-R4

**Photopic Flux vs. Wavelength**



#####

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2397          | NR            | 490    | 24908         | NR            | 620    | 118784        | NR            | 750    | 5037          | NR            | 880    | 2677          | NR            |
| 365    | 2084          | NR            | 495    | 30998         | NR            | 625    | 108951        | NR            | 755    | 4413          | NR            | 885    | 2940          | NR            |
| 370    | 2143          | NR            | 500    | 37103         | NR            | 630    | 99573         | NR            | 760    | 4189          | NR            | 890    | 3116          | NR            |
| 375    | 2413          | NR            | 505    | 42987         | NR            | 635    | 90444         | NR            | 765    | 3677          | NR            | 895    | 3345          | NR            |
| 380    | 2172          | NR            | 510    | 48702         | NR            | 640    | 80749         | NR            | 770    | 3366          | NR            | 900    | 2312          | NR            |
| 385    | 1997          | NR            | 515    | 53741         | NR            | 645    | 71664         | NR            | 775    | 3211          | NR            | 905    | 2829          | NR            |
| 390    | 1830          | NR            | 520    | 57283         | NR            | 650    | 63936         | NR            | 780    | 2682          | NR            | 910    | 2783          | NR            |
| 395    | 1861          | NR            | 525    | 61876         | NR            | 655    | 56611         | NR            | 785    | 2804          | NR            | 915    | 2662          | NR            |
| 400    | 1717          | NR            | 530    | 65398         | NR            | 660    | 49763         | NR            | 790    | 2581          | NR            | 920    | 3047          | NR            |
| 405    | 1761          | NR            | 535    | 69597         | NR            | 665    | 42891         | NR            | 795    | 2711          | NR            | 925    | 2256          | NR            |
| 410    | 2680          | NR            | 540    | 74214         | NR            | 670    | 36939         | NR            | 800    | 2609          | NR            | 930    | 2976          | NR            |
| 415    | 4374          | NR            | 545    | 79911         | NR            | 675    | 31946         | NR            | 805    | 2581          | NR            | 935    | 3503          | NR            |
| 420    | 8071          | NR            | 550    | 86153         | NR            | 680    | 27385         | NR            | 810    | 2404          | NR            | 940    | 4226          | NR            |
| 425    | 15169         | NR            | 555    | 93952         | NR            | 685    | 23504         | NR            | 815    | 2556          | NR            | 945    | 2930          | NR            |
| 430    | 26038         | NR            | 560    | 102904        | NR            | 690    | 20210         | NR            | 820    | 2742          | NR            | 950    | 2115          | NR            |
| 435    | 41316         | NR            | 565    | 112009        | NR            | 695    | 17459         | NR            | 825    | 2014          | NR            | 955    | 2634          | NR            |
| 440    | 59674         | NR            | 570    | 121662        | NR            | 700    | 15207         | NR            | 830    | 2488          | NR            | 960    | 4200          | NR            |
| 445    | 72751         | NR            | 575    | 130476        | NR            | 705    | 13322         | NR            | 835    | 2625          | NR            | 965    | 1982          | NR            |
| 450    | 65091         | NR            | 580    | 137926        | NR            | 710    | 11676         | NR            | 840    | 2754          | NR            | 970    | 3613          | NR            |
| 455    | 44894         | NR            | 585    | 143406        | NR            | 715    | 10626         | NR            | 845    | 2708          | NR            | 975    | 4034          | NR            |
| 460    | 32712         | NR            | 590    | 147039        | NR            | 720    | 9416          | NR            | 850    | 2608          | NR            | 980    | 3922          | NR            |
| 465    | 25296         | NR            | 595    | 147365        | NR            | 725    | 8333          | NR            | 855    | 2605          | NR            | 985    | 1909          | NR            |
| 470    | 19318         | NR            | 600    | 145800        | NR            | 730    | 7134          | NR            | 860    | 1765          | NR            | 990    | 3617          | NR            |
| 475    | 17265         | NR            | 605    | 141363        | NR            | 735    | 6437          | NR            | 865    | 2581          | NR            | 995    | 4767          | NR            |
| 480    | 18260         | NR            | 610    | 134199        | NR            | 740    | 5834          | NR            | 870    | 3016          | NR            | 1000   | 2528          | NR            |
| 485    | 20845         | NR            | 615    | 127683        | NR            | 745    | 5500          | NR            | 875    | 3952          | NR            |        |               |               |

REPORT NUMBER: SP1-1908-441-2-R4

**Scotopic Flux vs. Wavelength**




**Scotopic Lumens: 8494.8**

**S/P: 1.23**

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2397          | NR            | 490    | 24908         | NR            | 620    | 118784        | NR            | 750    | 5037          | NR            | 880    | 2677          | NR            |
| 365    | 2084          | NR            | 495    | 30998         | NR            | 625    | 108951        | NR            | 755    | 4413          | NR            | 885    | 2940          | NR            |
| 370    | 2143          | NR            | 500    | 37103         | NR            | 630    | 99573         | NR            | 760    | 4189          | NR            | 890    | 3116          | NR            |
| 375    | 2413          | NR            | 505    | 42987         | NR            | 635    | 90444         | NR            | 765    | 3677          | NR            | 895    | 3345          | NR            |
| 380    | 2172          | NR            | 510    | 48702         | NR            | 640    | 80749         | NR            | 770    | 3366          | NR            | 900    | 2312          | NR            |
| 385    | 1997          | NR            | 515    | 53741         | NR            | 645    | 71664         | NR            | 775    | 3211          | NR            | 905    | 2829          | NR            |
| 390    | 1830          | NR            | 520    | 57283         | NR            | 650    | 63936         | NR            | 780    | 2682          | NR            | 910    | 2783          | NR            |
| 395    | 1861          | NR            | 525    | 61876         | NR            | 655    | 56611         | NR            | 785    | 2804          | NR            | 915    | 2662          | NR            |
| 400    | 1717          | NR            | 530    | 65398         | NR            | 660    | 49763         | NR            | 790    | 2581          | NR            | 920    | 3047          | NR            |
| 405    | 1761          | NR            | 535    | 69597         | NR            | 665    | 42891         | NR            | 795    | 2711          | NR            | 925    | 2256          | NR            |
| 410    | 2680          | NR            | 540    | 74214         | NR            | 670    | 36939         | NR            | 800    | 2609          | NR            | 930    | 2976          | NR            |
| 415    | 4374          | NR            | 545    | 79911         | NR            | 675    | 31946         | NR            | 805    | 2581          | NR            | 935    | 3503          | NR            |
| 420    | 8071          | NR            | 550    | 86153         | NR            | 680    | 27385         | NR            | 810    | 2404          | NR            | 940    | 4226          | NR            |
| 425    | 15169         | NR            | 555    | 93952         | NR            | 685    | 23504         | NR            | 815    | 2556          | NR            | 945    | 2930          | NR            |
| 430    | 26038         | NR            | 560    | 102904        | NR            | 690    | 20210         | NR            | 820    | 2742          | NR            | 950    | 2115          | NR            |
| 435    | 41316         | NR            | 565    | 112009        | NR            | 695    | 17459         | NR            | 825    | 2014          | NR            | 955    | 2634          | NR            |
| 440    | 59674         | NR            | 570    | 121662        | NR            | 700    | 15207         | NR            | 830    | 2488          | NR            | 960    | 4200          | NR            |
| 445    | 72751         | NR            | 575    | 130476        | NR            | 705    | 13322         | NR            | 835    | 2625          | NR            | 965    | 1982          | NR            |
| 450    | 65091         | NR            | 580    | 137926        | NR            | 710    | 11676         | NR            | 840    | 2754          | NR            | 970    | 3613          | NR            |
| 455    | 44894         | NR            | 585    | 143406        | NR            | 715    | 10626         | NR            | 845    | 2708          | NR            | 975    | 4034          | NR            |
| 460    | 32712         | NR            | 590    | 147039        | NR            | 720    | 9416          | NR            | 850    | 2608          | NR            | 980    | 3922          | NR            |
| 465    | 25296         | NR            | 595    | 147365        | NR            | 725    | 8333          | NR            | 855    | 2605          | NR            | 985    | 1909          | NR            |
| 470    | 19318         | NR            | 600    | 145800        | NR            | 730    | 7134          | NR            | 860    | 1765          | NR            | 990    | 3617          | NR            |
| 475    | 17265         | NR            | 605    | 141363        | NR            | 735    | 6437          | NR            | 865    | 2581          | NR            | 995    | 4767          | NR            |
| 480    | 18260         | NR            | 610    | 134199        | NR            | 740    | 5834          | NR            | 870    | 3016          | NR            | 1000   | 2528          | NR            |
| 485    | 20845         | NR            | 615    | 127683        | NR            | 745    | 5500          | NR            | 875    | 3952          | NR            |        |               |               |

REPORT NUMBER: SP1-1908-441-2-R4

**Melanopic Flux vs. Wavelength**

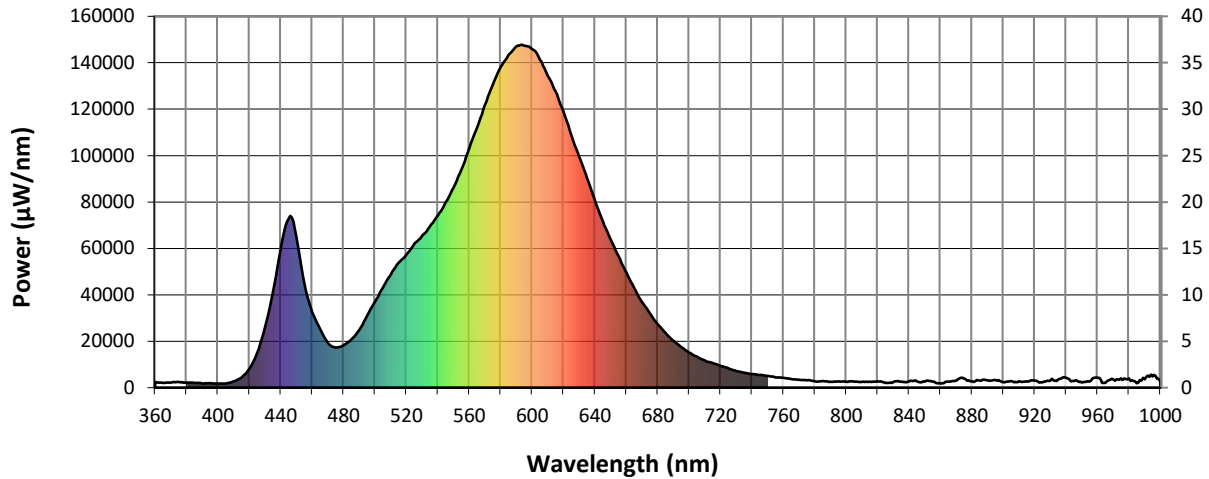

**Melanopic Lumens: 3101.5 M/P: 0.45**

| λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) | λ (nm) | Power (µW/nm) | Lumens (φ/nm) |
|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|--------|---------------|---------------|
| 360    | 2397          | NR            | 490    | 24908         | NR            | 620    | 118784        | NR            | 750    | 5037          | NR            | 880    | 2677          | NR            |
| 365    | 2084          | NR            | 495    | 30998         | NR            | 625    | 108951        | NR            | 755    | 4413          | NR            | 885    | 2940          | NR            |
| 370    | 2143          | NR            | 500    | 37103         | NR            | 630    | 99573         | NR            | 760    | 4189          | NR            | 890    | 3116          | NR            |
| 375    | 2413          | NR            | 505    | 42987         | NR            | 635    | 90444         | NR            | 765    | 3677          | NR            | 895    | 3345          | NR            |
| 380    | 2172          | NR            | 510    | 48702         | NR            | 640    | 80749         | NR            | 770    | 3366          | NR            | 900    | 2312          | NR            |
| 385    | 1997          | NR            | 515    | 53741         | NR            | 645    | 71664         | NR            | 775    | 3211          | NR            | 905    | 2829          | NR            |
| 390    | 1830          | NR            | 520    | 57283         | NR            | 650    | 63936         | NR            | 780    | 2682          | NR            | 910    | 2783          | NR            |
| 395    | 1861          | NR            | 525    | 61876         | NR            | 655    | 56611         | NR            | 785    | 2804          | NR            | 915    | 2662          | NR            |
| 400    | 1717          | NR            | 530    | 65398         | NR            | 660    | 49763         | NR            | 790    | 2581          | NR            | 920    | 3047          | NR            |
| 405    | 1761          | NR            | 535    | 69597         | NR            | 665    | 42891         | NR            | 795    | 2711          | NR            | 925    | 2256          | NR            |
| 410    | 2680          | NR            | 540    | 74214         | NR            | 670    | 36939         | NR            | 800    | 2609          | NR            | 930    | 2976          | NR            |
| 415    | 4374          | NR            | 545    | 79911         | NR            | 675    | 31946         | NR            | 805    | 2581          | NR            | 935    | 3503          | NR            |
| 420    | 8071          | NR            | 550    | 86153         | NR            | 680    | 27385         | NR            | 810    | 2404          | NR            | 940    | 4226          | NR            |
| 425    | 15169         | NR            | 555    | 93952         | NR            | 685    | 23504         | NR            | 815    | 2556          | NR            | 945    | 2930          | NR            |
| 430    | 26038         | NR            | 560    | 102904        | NR            | 690    | 20210         | NR            | 820    | 2742          | NR            | 950    | 2115          | NR            |
| 435    | 41316         | NR            | 565    | 112009        | NR            | 695    | 17459         | NR            | 825    | 2014          | NR            | 955    | 2634          | NR            |
| 440    | 59674         | NR            | 570    | 121662        | NR            | 700    | 15207         | NR            | 830    | 2488          | NR            | 960    | 4200          | NR            |
| 445    | 72751         | NR            | 575    | 130476        | NR            | 705    | 13322         | NR            | 835    | 2625          | NR            | 965    | 1982          | NR            |
| 450    | 65091         | NR            | 580    | 137926        | NR            | 710    | 11676         | NR            | 840    | 2754          | NR            | 970    | 3613          | NR            |
| 455    | 44894         | NR            | 585    | 143406        | NR            | 715    | 10626         | NR            | 845    | 2708          | NR            | 975    | 4034          | NR            |
| 460    | 32712         | NR            | 590    | 147039        | NR            | 720    | 9416          | NR            | 850    | 2608          | NR            | 980    | 3922          | NR            |
| 465    | 25296         | NR            | 595    | 147365        | NR            | 725    | 8333          | NR            | 855    | 2605          | NR            | 985    | 1909          | NR            |
| 470    | 19318         | NR            | 600    | 145800        | NR            | 730    | 7134          | NR            | 860    | 1765          | NR            | 990    | 3617          | NR            |
| 475    | 17265         | NR            | 605    | 141363        | NR            | 735    | 6437          | NR            | 865    | 2581          | NR            | 995    | 4767          | NR            |
| 480    | 18260         | NR            | 610    | 134199        | NR            | 740    | 5834          | NR            | 870    | 3016          | NR            | 1000   | 2528          | NR            |
| 485    | 20845         | NR            | 615    | 127683        | NR            | 745    | 5500          | NR            | 875    | 3952          | NR            |        |               |               |

REPORT NUMBER: SP1-1908-441-2-R4

TM-30-18

**Summary**

$R_f = 75.7$   
 $R_g = 93.9$   
 CIE  $R_a = 71.8$   
 $R_9 = -38.3$



**Color Vector Graphics**



REPORT NUMBER: SP1-1908-441-2-R4

TM-30-18

**Individual Sample Fidelity Index ( $R_{f,i}$ )**

|            |            |            |            |
|------------|------------|------------|------------|
| CES01 = 86 | CES26 = 67 | CES51 = 87 | CES76 = 63 |
| CES02 = 63 | CES27 = 88 | CES52 = 86 | CES77 = 80 |
| CES03 = 31 | CES28 = 87 | CES53 = 78 | CES78 = 67 |
| CES04 = 71 | CES29 = 66 | CES54 = 84 | CES79 = 87 |
| CES05 = 49 | CES30 = 73 | CES55 = 84 | CES80 = 86 |
| CES06 = 51 | CES31 = 70 | CES56 = 75 | CES81 = 71 |
| CES07 = 41 | CES32 = 65 | CES57 = 74 | CES82 = 94 |
| CES08 = 40 | CES33 = 73 | CES58 = 76 | CES83 = 90 |
| CES09 = 29 | CES34 = 79 | CES59 = 85 | CES84 = 89 |
| CES10 = 76 | CES35 = 89 | CES60 = 93 | CES85 = 77 |
| CES11 = 59 | CES36 = 97 | CES61 = 84 | CES86 = 61 |
| CES12 = 65 | CES37 = 87 | CES62 = 91 | CES87 = 78 |
| CES13 = 43 | CES38 = 81 | CES63 = 77 | CES88 = 77 |
| CES14 = 74 | CES39 = 95 | CES64 = 72 | CES89 = 67 |
| CES15 = 71 | CES40 = 92 | CES65 = 68 | CES90 = 76 |
| CES16 = 47 | CES41 = 88 | CES66 = 69 | CES91 = 89 |
| CES17 = 50 | CES42 = 89 | CES67 = 67 | CES92 = 58 |
| CES18 = 56 | CES43 = 79 | CES68 = 72 | CES93 = 74 |
| CES19 = 73 | CES44 = 99 | CES69 = 81 | CES94 = 49 |
| CES20 = 66 | CES45 = 85 | CES70 = 66 | CES95 = 68 |
| CES21 = 87 | CES46 = 80 | CES71 = 67 | CES96 = 76 |
| CES22 = 79 | CES47 = 82 | CES72 = 88 | CES97 = 82 |
| CES23 = 92 | CES48 = 69 | CES73 = 59 | CES98 = 75 |
| CES24 = 91 | CES49 = 80 | CES74 = 95 | CES99 = 62 |
| CES25 = 73 | CES50 = 87 | CES75 = 69 |            |





REPORT NUMBER: SP1-1908-441-2-R4

TM-30-18

Color Rendition by Hue-Angle Bin



REPORT NUMBER: SP1-1908-441-2-R4

TM-30-18

Measure Comparisons



(END OF REPORT)