

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331277-840

Luminaire Tested: **S122DIP-S290D1080U840-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331277-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S290D1080U840-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5209.3 lumens
Efficiency: N/A
Efficacy: 123.4 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

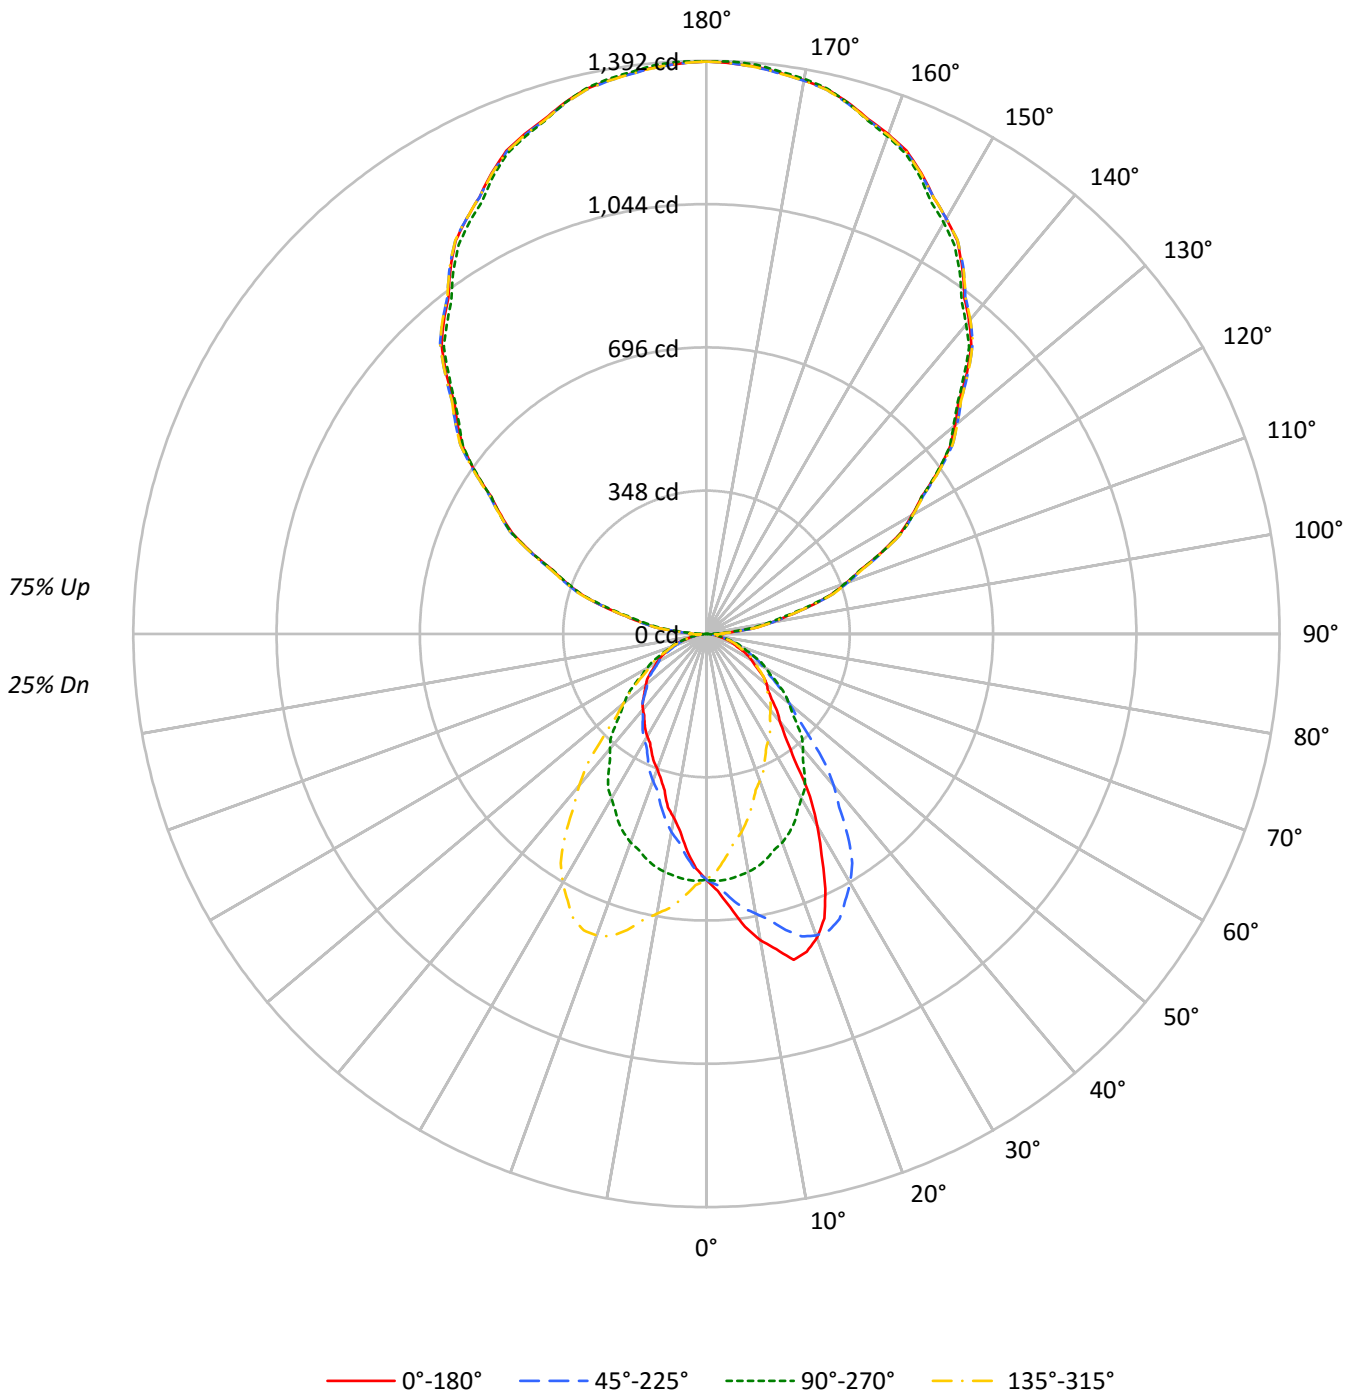



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	25
1	92	88	85	81	82	79	76	73	61	59	57	45	44	43	30	29	29	22
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	25	24	19
3	77	68	61	56	68	61	55	51	48	44	40	35	33	31	24	22	21	16
4	71	60	53	47	63	54	48	43	42	38	35	32	29	26	21	20	18	14
5	65	54	46	40	57	48	42	37	38	33	30	28	25	23	19	18	16	12
6	60	48	41	35	53	43	37	32	34	29	26	26	22	20	18	16	14	11
7	55	43	36	31	49	39	33	28	31	26	23	23	20	18	16	14	13	10
8	51	39	32	27	45	35	29	25	28	24	20	21	18	16	15	13	11	9
9	47	36	29	24	42	32	26	22	26	21	18	20	16	14	14	12	10	8
10	44	33	26	21	39	30	24	20	24	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9637	9637	9637	9637
5°	10804	9700	8596	9700
10°	12381	9621	7438	9621
15°	13697	9444	6572	9444
20°	13490	9256	5991	9256
25°	12162	9002	5624	9002
30°	10051	8600	5354	8600
35°	7324	8180	5164	8180
40°	5851	7685	5056	7685
45°	5112	7108	4914	7108
50°	4808	6551	4818	6551
55°	4428	5987	4687	5987
60°	4059	5383	4492	5383
65°	3698	4844	4294	4844
70°	3356	4319	4008	4319
75°	2982	3737	3550	3737
80°	2566	3087	2854	3087
85°	2297	2297	1704	2297



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.8	1.1
10°-20°	165.3	3.2
20°-30°	239.9	4.6
30°-40°	253.1	4.9
40°-50°	224.1	4.3
50°-60°	178.8	3.4
60°-70°	121.6	2.3
70°-80°	62.3	1.2
80°-90°	20.6	0.4
90°-100°	88.1	1.7
100°-110°	273.6	5.3
110°-120°	467.6	9.0
120°-130°	614.9	11.8
130°-140°	690.2	13.2
140°-150°	676.7	13.0
150°-160°	567.6	10.9
160°-170°	376.5	7.2
170°-180°	131.6	2.5
0°-30°	462.0	8.9
0°-40°	715.1	13.7
0°-60°	1118.0	21.5
0°-90°	1322.5	25.4
90°-120°	829.3	15.9
90°-150°	2811.1	54.0
90°-180°	3887.0	74.6
0°-180°	5209.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	597	597	597	597	597	
5°	667	598	530	598	667	67
15°	819	565	393	565	819	226
25°	683	505	316	505	683	309
35°	372	415	262	415	372	242
45°	224	311	215	311	224	176
55°	157	213	166	213	157	141
65°	97	127	112	127	97	96
75°	48	60	57	60	48	51
85°	12	12	9	12	12	15
90°	40	1	40	1	40	18
95°	73	61	73	61	73	81
105°	260	252	260	252	260	274
115°	469	469	469	469	469	463
125°	685	683	685	683	685	611
135°	894	883	894	883	894	688
145°	1084	1072	1084	1072	1084	677
155°	1235	1226	1235	1226	1235	568
165°	1335	1334	1335	1334	1335	376
175°	1383	1388	1383	1388	1383	131
180°	1390	1390	1390	1390	1390	



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	624.4	624.6	625.0	622.1	621.7	621.7	619.1	616.9	614.3	610.9	611.3
5°	666.6	669.1	670.0	667.3	663.2	662.8	658.8	652.5	646.4	641.7	638.2
7.5°	717.0	718.0	715.8	712.2	709.1	703.6	696.3	689.2	679.2	670.1	663.4
10°	755.2	756.6	752.7	747.4	743.1	736.6	726.1	715.3	702.3	689.6	679.5
12.5°	784.2	787.6	782.5	781.9	774.5	765.6	753.1	747.6	729.2	711.7	700.7
15°	819.4	819.2	819.7	815.3	809.8	808.4	795.2	780.6	754.8	744.4	726.5
17.5°	809.2	812.7	814.4	814.3	814.2	813.2	809.0	799.9	786.9	770.1	749.5
20°	785.1	789.6	790.3	795.6	798.6	802.4	804.1	801.5	793.6	779.5	761.6
22.5°	747.6	748.9	751.0	759.2	765.7	775.5	780.5	789.1	786.0	779.1	764.2
25°	682.7	680.4	688.4	692.6	707.5	723.1	734.4	746.7	757.7	764.4	760.0
27.5°	604.8	601.4	613.4	624.4	636.4	653.4	670.9	691.6	708.7	730.3	737.7
30°	539.1	541.2	552.6	564.3	582.7	606.5	626.3	648.9	673.6	697.6	714.4
32.5°	468.3	476.2	483.4	501.4	517.6	544.1	573.1	601.5	632.1	659.4	685.4
35°	371.6	380.8	390.9	403.9	426.7	453.0	481.3	519.6	561.4	598.7	629.4
37.5°	312.9	311.3	317.1	326.6	345.0	366.3	398.8	436.6	485.7	529.7	573.1
40°	277.6	276.7	280.7	289.5	303.5	319.1	347.6	380.8	426.5	480.2	531.8
42.5°	253.4	253.9	256.2	262.4	272.0	284.8	306.1	334.4	376.2	426.8	482.2
45°	223.9	225.5	228.0	231.1	236.5	247.1	259.0	279.2	312.3	354.5	409.0
47.5°	202.7	202.8	205.3	207.9	211.2	217.1	226.9	239.5	262.9	297.2	344.2
50°	191.4	189.8	191.6	193.6	197.0	201.2	207.6	219.5	235.1	262.9	302.2
52.5°	177.3	177.4	179.0	179.9	182.9	187.0	192.9	201.2	215.3	237.0	269.2
55°	157.3	158.5	159.5	160.8	163.6	166.5	171.2	176.6	187.6	203.9	227.8
57.5°	138.6	139.0	139.9	142.5	144.2	146.9	151.3	156.3	163.5	175.5	193.5
60°	125.7	125.7	127.5	128.7	131.0	133.7	137.1	142.0	148.5	158.2	172.8
62.5°	114.0	113.8	114.5	116.4	118.2	120.7	124.1	128.3	134.3	143.1	154.9
65°	96.8	96.3	97.8	98.2	100.0	102.5	105.3	109.7	114.5	120.9	131.5
67.5°	80.3	80.9	81.6	82.4	83.4	86.1	88.0	91.0	95.1	100.5	107.6
70°	71.1	71.1	71.1	71.8	73.2	74.5	76.3	78.9	82.8	87.4	93.8
72.5°	60.8	61.6	62.3	61.9	63.6	64.4	66.7	68.1	71.8	74.7	80.4
75°	47.8	47.8	47.8	48.9	49.6	50.2	51.6	53.0	54.8	58.5	61.5
77.5°	35.6	35.5	35.7	36.1	36.8	37.6	38.0	39.2	40.9	42.6	45.1
80°	27.6	28.0	28.2	28.7	28.7	29.1	29.4	31.0	32.1	33.2	34.8
82.5°	21.3	21.4	21.4	21.5	21.7	22.0	22.6	23.1	23.5	24.4	25.7
85°	12.4	12.1	12.1	12.6	12.4	12.4	12.8	13.3	13.3	13.5	14.2
87.5°	12.7	12.7	12.8	12.6	12.5	12.7	12.8	12.7	13.0	13.3	12.4
90°	39.9	39.6	39.4	39.1	38.9	39.0	39.5	40.0	40.5	41.1	35.3
92.5°	38.0	38.0	37.9	37.9	37.8	37.8	37.6	37.5	37.4	37.3	36.0
95°	72.7	73.2	73.8	74.3	74.8	75.0	75.0	75.0	75.0	75.0	74.5
97.5°	126.0	126.0	126.1	126.1	126.2	126.2	126.2	126.2	126.2	126.2	125.2
100°	160.7	161.0	161.3	161.5	161.8	161.9	161.9	161.9	161.9	161.9	161.1
102.5°	200.2	200.4	200.7	200.9	201.2	201.2	201.0	200.8	200.6	200.4	199.3
105°	260.4	260.4	260.4	260.4	260.4	260.1	259.6	259.1	258.6	258.0	257.5
107.5°	317.2	318.4	319.6	320.8	321.9	322.4	322.2	322.0	321.8	321.6	321.6
110°	361.3	362.0	362.8	363.7	364.5	364.9	364.9	364.9	364.9	364.9	364.9



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	403.5	404.1	404.7	405.3	405.9	406.5	407.1	407.7	408.3	408.9	409.1
115°	469.2	470.0	470.8	471.6	472.3	472.8	473.1	473.4	473.6	473.9	474.4
117.5°	531.9	532.6	533.4	534.2	535.0	535.7	536.3	536.9	537.6	538.2	539.7
120°	575.9	576.7	577.5	578.3	579.1	579.5	579.5	579.5	579.5	579.5	581.6
122.5°	619.1	619.8	620.3	620.9	621.5	622.0	622.7	623.3	623.9	624.5	626.0
125°	685.1	685.3	685.6	685.8	686.1	686.6	687.4	688.2	688.9	689.7	690.5
127.5°	745.1	746.0	746.8	747.6	748.4	749.3	750.2	751.2	752.1	753.1	754.1
130°	788.3	789.3	790.3	791.4	792.4	793.2	793.8	794.3	794.8	795.4	795.9
132.5°	829.6	830.4	831.2	832.1	832.9	833.9	835.1	836.2	837.4	838.5	838.4
135°	893.8	894.6	895.4	896.2	897.0	897.5	897.8	898.1	898.3	898.6	898.1
137.5°	952.0	953.1	954.1	955.1	956.2	956.8	957.0	957.3	957.5	957.7	956.9
140°	992.4	993.4	994.5	995.5	996.5	997.0	997.0	997.0	997.0	997.0	995.8
142.5°	1029.0	1030.1	1031.1	1032.1	1033.2	1033.6	1033.4	1033.2	1033.0	1032.8	1031.9
145°	1083.9	1084.9	1086.0	1087.0	1088.0	1088.4	1088.2	1087.9	1087.6	1087.4	1085.8
147.5°	1133.0	1133.9	1134.9	1135.9	1136.9	1137.1	1136.5	1136.0	1135.4	1134.8	1133.8
150°	1164.9	1165.6	1166.4	1167.2	1168.0	1168.0	1167.2	1166.4	1165.6	1164.9	1163.8
152.5°	1194.9	1195.9	1196.9	1197.8	1198.8	1198.8	1197.8	1196.9	1195.9	1194.9	1193.7
155°	1235.2	1236.0	1236.8	1237.6	1238.3	1238.1	1236.8	1235.5	1234.2	1232.8	1232.1
157.5°	1269.9	1271.2	1272.4	1273.6	1275.0	1274.7	1272.9	1271.1	1269.4	1267.6	1267.1
160°	1291.5	1292.5	1293.6	1294.6	1295.7	1295.5	1293.8	1292.3	1290.7	1289.2	1288.9
162.5°	1310.3	1311.5	1312.8	1314.0	1315.2	1315.0	1313.2	1311.5	1309.7	1308.0	1307.7
165°	1334.9	1336.3	1337.6	1338.9	1340.1	1339.9	1338.1	1336.3	1334.4	1332.6	1332.6
167.5°	1355.1	1356.5	1357.8	1359.2	1360.5	1360.3	1358.5	1356.7	1354.8	1353.0	1353.0
170°	1365.4	1367.0	1368.6	1370.1	1371.7	1371.5	1369.7	1367.9	1366.0	1364.2	1364.5
172.5°	1373.8	1375.4	1377.0	1378.6	1380.1	1380.0	1378.2	1376.3	1374.5	1372.7	1372.9
175°	1383.0	1384.6	1386.1	1387.8	1389.3	1389.2	1387.4	1385.5	1383.7	1381.8	1382.4
177.5°	1387.3	1388.5	1389.8	1391.0	1392.2	1392.2	1391.0	1389.8	1388.5	1387.3	1387.7
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	612.5	611.1	610.2	606.8	603.9	601.0	600.1	600.4	596.3	592.5	590.9
5°	636.4	631.8	627.4	621.3	613.9	605.8	601.8	598.5	590.5	581.8	576.7
7.5°	657.7	651.2	642.8	631.2	620.5	607.8	599.8	592.7	581.0	568.7	561.1
10°	670.8	661.9	651.1	636.8	623.8	608.3	597.6	586.8	573.1	558.4	549.2
12.5°	682.0	669.9	659.3	641.1	625.6	606.3	593.6	578.3	563.9	546.4	537.5
15°	708.6	686.4	666.2	645.5	626.5	599.7	585.4	565.0	546.0	524.4	514.1
17.5°	729.2	704.2	672.5	646.2	624.0	594.2	573.4	549.0	526.4	501.8	487.8
20°	740.9	712.3	678.1	646.9	620.4	586.3	563.6	538.7	512.3	484.5	469.4
22.5°	747.9	717.8	684.0	644.2	613.0	580.0	551.4	523.9	497.3	467.3	451.4
25°	750.1	722.7	686.8	641.9	603.8	566.4	532.0	505.3	473.0	445.0	421.9
27.5°	739.2	719.5	685.1	637.5	593.2	549.5	511.1	481.0	446.9	416.5	393.1
30°	725.8	714.4	680.9	633.2	584.7	537.8	495.5	461.3	427.4	396.7	372.7
32.5°	705.1	702.7	673.2	626.9	575.7	522.9	479.2	444.6	407.0	376.8	354.1
35°	664.4	675.4	656.8	613.0	558.9	501.7	454.4	415.0	376.0	347.1	325.8
37.5°	609.8	637.1	632.3	592.6	535.9	478.7	426.5	385.3	348.1	318.9	298.0
40°	572.1	607.0	612.1	576.9	519.9	460.9	405.6	364.6	328.3	301.6	280.5
42.5°	531.8	572.5	586.3	558.3	502.2	442.1	386.9	344.4	308.4	282.6	263.9
45°	464.1	518.0	543.0	526.9	472.8	411.3	354.5	311.3	278.7	254.4	239.9
47.5°	400.8	459.7	493.3	487.7	440.1	379.2	323.0	281.6	249.8	230.5	217.5
50°	356.1	416.6	457.2	459.1	416.6	356.3	299.8	260.8	231.7	213.6	203.0
52.5°	317.1	375.0	419.2	429.0	390.3	332.4	279.1	240.2	214.6	197.9	188.5
55°	266.3	315.2	364.3	382.2	351.2	296.2	246.8	212.7	188.5	177.1	168.8
57.5°	221.5	262.2	307.5	327.3	308.2	261.1	214.8	185.1	165.6	155.5	149.2
60°	197.7	229.8	270.2	293.9	277.3	235.4	195.0	166.7	150.7	141.8	135.8
62.5°	175.7	204.2	238.3	259.9	251.0	211.4	175.2	150.3	136.4	128.1	123.7
65°	145.0	167.4	193.9	213.8	207.8	177.8	148.1	126.8	115.8	109.2	105.7
67.5°	119.4	135.6	153.9	171.4	166.6	145.3	121.6	104.9	96.7	91.0	88.9
70°	103.2	115.6	131.9	145.9	142.0	124.6	105.7	91.5	84.4	79.6	77.6
72.5°	87.9	98.0	110.5	121.9	119.3	104.7	89.1	78.4	72.8	68.4	66.8
75°	66.3	74.1	81.7	89.3	88.6	77.4	68.2	59.9	55.5	52.1	51.4
77.5°	49.0	53.3	58.5	62.9	61.7	55.2	48.1	43.3	40.2	37.9	37.5
80°	37.4	39.9	43.6	46.8	45.2	42.4	36.7	33.2	31.0	28.7	27.8
82.5°	27.2	29.6	31.8	33.6	32.3	29.8	26.3	23.9	22.5	21.0	20.6
85°	14.2	15.6	16.6	17.0	16.6	14.9	13.3	12.4	11.2	10.5	10.3
87.5°	11.4	10.3	9.1	8.6	7.5	6.8	5.5	4.2	4.7	5.2	5.5
90°	29.6	23.8	18.1	13.7	10.6	7.5	4.3	1.2	4.3	7.5	10.6
92.5°	34.6	33.2	31.9	30.1	27.8	25.4	23.1	20.9	23.1	25.4	27.8
95°	74.0	73.5	73.0	71.4	68.8	66.2	63.6	61.0	63.6	66.2	68.8
97.5°	124.2	123.2	122.3	120.6	118.4	116.0	113.7	111.5	113.7	116.0	118.4
100°	160.3	159.6	158.8	157.3	155.2	153.2	151.1	149.0	151.1	153.2	155.2
102.5°	198.3	197.4	196.4	195.1	193.4	191.8	190.1	188.4	190.1	191.8	193.4
105°	257.0	256.5	256.0	255.3	254.6	253.8	253.0	252.2	253.0	253.8	254.6
107.5°	321.6	321.6	321.6	321.0	319.9	318.8	317.6	316.5	317.6	318.8	319.9
110°	364.9	364.9	364.9	364.1	362.4	360.9	359.3	357.8	359.3	360.9	362.4



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	409.3	409.5	409.8	409.1	407.5	406.0	404.3	402.8	404.3	406.0	407.5
115°	474.9	475.4	475.9	475.4	473.9	472.3	470.8	469.2	470.8	472.3	473.9
117.5°	541.1	542.6	544.0	543.7	541.6	539.6	537.5	535.3	537.5	539.6	541.6
120°	583.7	585.7	587.8	587.8	585.7	583.7	581.6	579.5	581.6	583.7	585.7
122.5°	627.4	628.9	630.4	629.9	627.3	624.8	622.4	619.9	622.4	624.8	627.3
125°	691.4	692.1	692.9	692.1	689.7	687.4	685.1	682.7	685.1	687.4	689.7
127.5°	755.0	755.9	756.9	755.8	752.9	749.9	746.9	744.0	746.9	749.9	752.9
130°	796.4	796.9	797.4	796.0	792.5	789.2	785.8	782.4	785.8	789.2	792.5
132.5°	838.3	838.2	838.1	836.7	833.8	831.1	828.4	825.6	828.4	831.1	833.8
135°	897.5	897.0	896.5	894.7	891.9	889.1	886.2	883.3	886.2	889.1	891.9
137.5°	956.3	955.6	954.9	953.4	951.1	948.8	946.4	944.0	946.4	948.8	951.1
140°	994.5	993.2	991.9	990.1	987.7	985.3	983.0	980.7	983.0	985.3	987.7
142.5°	1031.0	1030.1	1029.2	1027.5	1025.2	1022.9	1020.6	1018.2	1020.6	1022.9	1025.2
145°	1084.3	1082.7	1081.2	1079.4	1077.6	1075.8	1074.0	1072.2	1074.0	1075.8	1077.6
147.5°	1132.8	1131.7	1130.6	1129.0	1126.8	1124.6	1122.5	1120.2	1122.5	1124.6	1126.8
150°	1162.8	1161.7	1160.6	1159.3	1157.8	1156.2	1154.7	1153.1	1154.7	1156.2	1157.8
152.5°	1192.3	1191.1	1189.8	1188.4	1186.9	1185.3	1183.8	1182.1	1183.8	1185.3	1186.9
155°	1231.3	1230.5	1229.7	1229.0	1228.2	1227.4	1226.6	1225.9	1226.6	1227.4	1228.2
157.5°	1266.7	1266.2	1265.7	1265.3	1264.7	1264.1	1263.6	1263.1	1263.6	1264.1	1264.7
160°	1288.7	1288.4	1288.1	1287.8	1287.2	1286.7	1286.2	1285.7	1286.2	1286.7	1287.2
162.5°	1307.4	1307.2	1306.9	1306.8	1306.6	1306.5	1306.4	1306.3	1306.4	1306.5	1306.6
165°	1332.6	1332.6	1332.6	1332.7	1332.9	1333.2	1333.5	1333.7	1333.5	1333.2	1332.9
167.5°	1353.1	1353.1	1353.2	1353.6	1354.4	1355.1	1355.9	1356.8	1355.9	1355.1	1354.4
170°	1364.7	1365.0	1365.3	1365.8	1366.5	1367.4	1368.2	1369.0	1368.2	1367.4	1366.5
172.5°	1373.2	1373.5	1373.7	1374.2	1375.0	1375.8	1376.6	1377.4	1376.6	1375.8	1375.0
175°	1382.9	1383.4	1383.9	1384.6	1385.3	1386.1	1386.9	1387.8	1386.9	1386.1	1385.3
177.5°	1388.1	1388.5	1388.9	1389.5	1390.1	1390.7	1391.3	1391.9	1391.3	1390.7	1390.1
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	589.1	587.9	584.1	582.1	578.8	575.6	573.6	574.5	575.2	574.9	574.3
5°	572.1	567.7	561.1	555.4	551.3	543.7	540.5	538.9	537.5	535.9	534.3
7.5°	552.0	545.1	535.6	527.5	519.8	510.3	504.9	501.8	498.5	494.8	491.6
10°	537.8	528.1	518.0	506.5	497.4	488.9	481.3	476.3	471.6	467.3	464.1
12.5°	522.7	511.6	499.1	483.4	473.3	461.1	460.0	451.1	443.9	441.2	437.5
15°	498.8	483.1	467.3	448.7	440.7	429.7	422.8	415.9	409.7	405.4	404.2
17.5°	471.5	451.3	435.6	422.2	409.1	397.8	391.4	386.0	380.8	375.1	374.3
20°	450.8	433.3	416.2	404.5	390.9	379.4	371.6	366.2	361.7	358.3	355.4
22.5°	431.1	412.0	396.3	383.5	370.2	360.9	354.8	349.4	345.8	342.0	339.2
25°	399.6	384.8	367.5	353.0	342.0	336.1	331.0	326.5	324.2	321.6	318.4
27.5°	372.0	355.5	339.4	328.2	318.5	313.3	309.6	306.5	304.4	302.9	301.0
30°	352.6	335.9	323.3	312.3	304.2	298.9	296.6	294.8	292.3	291.3	290.4
32.5°	333.9	318.8	308.0	298.4	290.8	287.3	285.3	283.6	281.7	280.7	278.8
35°	307.4	294.8	284.3	278.9	272.8	269.7	268.2	265.9	264.1	263.2	262.9
37.5°	282.5	271.6	264.6	257.8	255.2	253.4	251.2	249.6	249.0	248.9	248.6
40°	266.3	257.4	251.2	245.7	244.6	241.8	239.9	238.6	238.6	238.8	238.6
42.5°	251.7	243.6	238.1	233.4	232.1	230.5	228.5	228.5	228.8	229.6	228.8
45°	229.4	223.7	219.7	217.5	215.0	213.4	213.1	213.8	214.0	214.3	215.0
47.5°	208.9	205.1	201.6	199.0	197.9	197.7	197.4	198.6	199.8	200.2	201.2
50°	196.8	192.5	189.5	187.8	186.9	186.5	186.9	188.3	189.2	190.4	191.1
52.5°	183.3	180.2	178.1	176.8	176.5	176.8	176.8	178.4	179.9	180.4	180.7
55°	164.5	162.2	161.8	159.7	160.6	160.4	161.5	162.4	163.8	165.2	165.4
57.5°	145.7	143.9	142.7	142.9	143.2	144.2	145.1	146.7	148.1	149.7	149.8
60°	133.3	132.4	131.7	131.7	132.1	133.5	134.6	136.2	137.1	138.1	138.8
62.5°	121.9	121.0	120.3	120.7	121.9	122.7	124.0	124.9	125.8	126.7	127.0
65°	103.9	103.5	104.1	104.6	104.8	105.9	107.6	108.3	109.2	109.7	111.3
67.5°	87.4	87.5	87.4	88.0	89.4	89.6	91.1	92.7	92.9	93.8	94.8
70°	76.1	76.6	77.1	77.6	78.7	79.2	80.3	81.0	81.9	82.6	83.3
72.5°	65.8	65.9	66.4	66.3	67.4	68.3	69.3	70.0	70.9	71.8	72.4
75°	50.7	50.7	51.2	51.4	52.5	53.7	53.4	53.9	54.8	55.7	56.2
77.5°	37.1	36.6	37.1	37.3	37.7	38.6	38.8	39.4	40.5	40.2	40.7
80°	28.2	27.6	28.2	28.5	28.5	29.6	29.6	30.1	30.7	30.1	30.7
82.5°	20.1	19.8	20.3	20.4	20.7	20.8	21.1	21.2	21.9	21.6	21.9
85°	10.1	9.9	10.1	9.9	10.1	10.3	10.3	10.1	10.1	10.5	9.9
87.5°	5.9	6.6	7.5	8.7	9.6	10.6	10.3	10.2	10.1	9.6	9.6
90°	13.7	18.1	23.8	29.6	35.3	41.1	40.5	40.0	39.5	39.0	38.9
92.5°	30.1	31.9	33.2	34.6	36.0	37.3	37.4	37.5	37.6	37.8	37.8
95°	71.4	73.0	73.5	74.0	74.5	75.0	75.0	75.0	75.0	75.0	74.8
97.5°	120.6	122.3	123.2	124.2	125.2	126.2	126.2	126.2	126.2	126.2	126.2
100°	157.3	158.8	159.6	160.3	161.1	161.9	161.9	161.9	161.9	161.9	161.8
102.5°	195.1	196.4	197.4	198.3	199.3	200.4	200.6	200.8	201.0	201.2	201.2
105°	255.3	256.0	256.5	257.0	257.5	258.0	258.6	259.1	259.6	260.1	260.4
107.5°	321.0	321.6	321.6	321.6	321.6	321.6	321.8	322.0	322.2	322.4	321.9
110°	364.1	364.9	364.9	364.9	364.9	364.9	364.9	364.9	364.9	364.9	364.5



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	409.1	409.8	409.5	409.3	409.1	408.9	408.3	407.7	407.1	406.5	405.9
115°	475.4	475.9	475.4	474.9	474.4	473.9	473.6	473.4	473.1	472.8	472.3
117.5°	543.7	544.0	542.6	541.1	539.7	538.2	537.6	536.9	536.3	535.7	535.0
120°	587.8	587.8	585.7	583.7	581.6	579.5	579.5	579.5	579.5	579.5	579.1
122.5°	629.9	630.4	628.9	627.4	626.0	624.5	623.9	623.3	622.7	622.0	621.5
125°	692.1	692.9	692.1	691.4	690.5	689.7	688.9	688.2	687.4	686.6	686.1
127.5°	755.8	756.9	755.9	755.0	754.1	753.1	752.1	751.2	750.2	749.3	748.4
130°	796.0	797.4	796.9	796.4	795.9	795.4	794.8	794.3	793.8	793.2	792.4
132.5°	836.7	838.1	838.2	838.3	838.4	838.5	837.4	836.2	835.1	833.9	832.9
135°	894.7	896.5	897.0	897.5	898.1	898.6	898.3	898.1	897.8	897.5	897.0
137.5°	953.4	954.9	955.6	956.3	956.9	957.7	957.5	957.3	957.0	956.8	956.2
140°	990.1	991.9	993.2	994.5	995.8	997.0	997.0	997.0	997.0	997.0	996.5
142.5°	1027.5	1029.2	1030.1	1031.0	1031.9	1032.8	1033.0	1033.2	1033.4	1033.6	1033.2
145°	1079.4	1081.2	1082.7	1084.3	1085.8	1087.4	1087.6	1087.9	1088.2	1088.4	1088.0
147.5°	1129.0	1130.6	1131.7	1132.8	1133.8	1134.8	1135.4	1136.0	1136.5	1137.1	1136.9
150°	1159.3	1160.6	1161.7	1162.8	1163.8	1164.9	1165.6	1166.4	1167.2	1168.0	1168.0
152.5°	1188.4	1189.8	1191.1	1192.3	1193.7	1194.9	1195.9	1196.9	1197.8	1198.8	1198.8
155°	1229.0	1229.7	1230.5	1231.3	1232.1	1232.8	1234.2	1235.5	1236.8	1238.1	1238.3
157.5°	1265.3	1265.7	1266.2	1266.7	1267.1	1267.6	1269.4	1271.1	1272.9	1274.7	1275.0
160°	1287.8	1288.1	1288.4	1288.7	1288.9	1289.2	1290.7	1292.3	1293.8	1295.5	1295.7
162.5°	1306.8	1306.9	1307.2	1307.4	1307.7	1308.0	1309.7	1311.5	1313.2	1315.0	1315.2
165°	1332.7	1332.6	1332.6	1332.6	1332.6	1332.6	1334.4	1336.3	1338.1	1339.9	1340.1
167.5°	1353.6	1353.2	1353.1	1353.1	1353.0	1353.0	1354.8	1356.7	1358.5	1360.3	1360.5
170°	1365.8	1365.3	1365.0	1364.7	1364.5	1364.2	1366.0	1367.9	1369.7	1371.5	1371.7
172.5°	1374.2	1373.7	1373.5	1373.2	1372.9	1372.7	1374.5	1376.3	1378.2	1380.0	1380.1
175°	1384.6	1383.9	1383.4	1382.9	1382.4	1381.8	1383.7	1385.5	1387.4	1389.2	1389.3
177.5°	1389.5	1388.9	1388.5	1388.1	1387.7	1387.3	1388.5	1389.8	1391.0	1392.2	1392.2
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	572.5	572.1	572.1	570.5	572.1	572.1	572.5	574.3	574.9	575.2	574.5
5°	531.1	530.4	529.3	530.4	529.3	530.4	531.1	534.3	535.9	537.5	538.9
7.5°	490.1	487.4	487.0	484.2	487.0	487.4	490.1	491.6	494.8	498.5	501.8
10°	460.2	458.4	458.1	453.7	458.1	458.4	460.2	464.1	467.3	471.6	476.3
12.5°	437.5	433.0	433.9	431.4	433.9	433.0	437.5	437.5	441.2	443.9	451.1
15°	398.0	398.0	397.1	393.2	397.1	398.0	398.0	404.2	405.4	409.7	415.9
17.5°	369.7	369.2	367.1	368.2	367.1	369.2	369.7	374.3	375.1	380.8	386.0
20°	352.8	351.4	348.7	348.7	348.7	351.4	352.8	355.4	358.3	361.7	366.2
22.5°	336.9	336.8	333.9	334.8	333.9	336.8	336.9	339.2	342.0	345.8	349.4
25°	318.2	316.4	315.0	315.7	315.0	316.4	318.2	318.4	321.6	324.2	326.5
27.5°	300.4	299.4	299.3	297.5	299.3	299.4	300.4	301.0	302.9	304.4	306.5
30°	290.2	287.9	288.3	287.2	288.3	287.9	290.2	290.4	291.3	292.3	294.8
32.5°	278.4	277.6	277.2	276.2	277.2	277.6	278.4	278.8	280.7	281.7	283.6
35°	262.5	262.7	261.6	262.0	261.6	262.7	262.5	262.9	263.2	264.1	265.9
37.5°	248.4	249.1	248.6	248.7	248.6	249.1	248.4	248.6	248.9	249.0	249.6
40°	239.2	239.2	239.2	239.9	239.2	239.2	239.2	238.6	238.8	238.6	238.6
42.5°	230.5	230.0	229.7	229.6	229.7	230.0	230.5	228.8	229.6	228.8	228.5
45°	215.4	216.1	216.3	215.2	216.3	216.1	215.4	215.0	214.3	214.0	213.8
47.5°	201.8	201.9	201.8	202.8	201.8	201.9	201.8	201.2	200.2	199.8	198.6
50°	192.3	191.8	192.3	191.8	192.3	191.8	192.3	191.1	190.4	189.2	188.3
52.5°	182.2	182.3	182.0	181.9	182.0	182.3	182.2	180.7	180.4	179.9	178.4
55°	166.3	166.7	166.5	166.5	166.5	166.7	166.3	165.4	165.2	163.8	162.4
57.5°	150.0	150.4	150.7	149.7	150.7	150.4	150.0	149.8	149.7	148.1	146.7
60°	138.6	139.7	139.5	139.1	139.5	139.7	138.6	138.8	138.1	137.1	136.2
62.5°	128.1	128.6	128.5	128.4	128.5	128.6	128.1	127.0	126.7	125.8	124.9
65°	112.0	112.4	111.7	112.4	111.7	112.4	112.0	111.3	109.7	109.2	108.3
67.5°	94.5	94.7	95.2	95.5	95.2	94.7	94.5	94.8	93.8	92.9	92.7
70°	83.7	83.5	84.2	84.9	84.2	83.5	83.7	83.3	82.6	81.9	81.0
72.5°	72.3	72.8	72.6	73.1	72.6	72.8	72.3	72.4	71.8	70.9	70.0
75°	55.7	56.5	56.2	56.9	56.2	56.5	55.7	56.2	55.7	54.8	53.9
77.5°	40.3	40.4	40.3	40.7	40.3	40.4	40.3	40.7	40.2	40.5	39.4
80°	30.7	30.3	29.8	30.7	29.8	30.3	30.7	30.7	30.1	30.7	30.1
82.5°	21.4	21.6	21.2	21.2	21.2	21.6	21.4	21.9	21.6	21.9	21.2
85°	9.9	9.6	9.2	9.2	9.2	9.6	9.9	9.9	10.5	10.1	10.1
87.5°	9.7	9.5	9.6	9.5	9.6	9.5	9.7	9.6	9.6	10.1	10.2
90°	39.1	39.4	39.6	39.9	39.6	39.4	39.1	38.9	39.0	39.5	40.0
92.5°	37.9	37.9	38.0	38.0	38.0	37.9	37.9	37.8	37.8	37.6	37.5
95°	74.3	73.8	73.2	72.7	73.2	73.8	74.3	74.8	75.0	75.0	75.0
97.5°	126.1	126.1	126.0	126.0	126.0	126.1	126.1	126.2	126.2	126.2	126.2
100°	161.5	161.3	161.0	160.7	161.0	161.3	161.5	161.8	161.9	161.9	161.9
102.5°	200.9	200.7	200.4	200.2	200.4	200.7	200.9	201.2	201.2	201.0	200.8
105°	260.4	260.4	260.4	260.4	260.4	260.4	260.4	260.4	260.1	259.6	259.1
107.5°	320.8	319.6	318.4	317.2	318.4	319.6	320.8	321.9	322.4	322.2	322.0
110°	363.7	362.8	362.0	361.3	362.0	362.8	363.7	364.5	364.9	364.9	364.9



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	405.3	404.7	404.1	403.5	404.1	404.7	405.3	405.9	406.5	407.1	407.7
115°	471.6	470.8	470.0	469.2	470.0	470.8	471.6	472.3	472.8	473.1	473.4
117.5°	534.2	533.4	532.6	531.9	532.6	533.4	534.2	535.0	535.7	536.3	536.9
120°	578.3	577.5	576.7	575.9	576.7	577.5	578.3	579.1	579.5	579.5	579.5
122.5°	620.9	620.3	619.8	619.1	619.8	620.3	620.9	621.5	622.0	622.7	623.3
125°	685.8	685.6	685.3	685.1	685.3	685.6	685.8	686.1	686.6	687.4	688.2
127.5°	747.6	746.8	746.0	745.1	746.0	746.8	747.6	748.4	749.3	750.2	751.2
130°	791.4	790.3	789.3	788.3	789.3	790.3	791.4	792.4	793.2	793.8	794.3
132.5°	832.1	831.2	830.4	829.6	830.4	831.2	832.1	832.9	833.9	835.1	836.2
135°	896.2	895.4	894.6	893.8	894.6	895.4	896.2	897.0	897.5	897.8	898.1
137.5°	955.1	954.1	953.1	952.0	953.1	954.1	955.1	956.2	956.8	957.0	957.3
140°	995.5	994.5	993.4	992.4	993.4	994.5	995.5	996.5	997.0	997.0	997.0
142.5°	1032.1	1031.1	1030.1	1029.0	1030.1	1031.1	1032.1	1033.2	1033.6	1033.4	1033.2
145°	1087.0	1086.0	1084.9	1083.9	1084.9	1086.0	1087.0	1088.0	1088.4	1088.2	1087.9
147.5°	1135.9	1134.9	1133.9	1133.0	1133.9	1134.9	1135.9	1136.9	1137.1	1136.5	1136.0
150°	1167.2	1166.4	1165.6	1164.9	1165.6	1166.4	1167.2	1168.0	1168.0	1167.2	1166.4
152.5°	1197.8	1196.9	1195.9	1194.9	1195.9	1196.9	1197.8	1198.8	1198.8	1197.8	1196.9
155°	1237.6	1236.8	1236.0	1235.2	1236.0	1236.8	1237.6	1238.3	1238.1	1236.8	1235.5
157.5°	1273.6	1272.4	1271.2	1269.9	1271.2	1272.4	1273.6	1275.0	1274.7	1272.9	1271.1
160°	1294.6	1293.6	1292.5	1291.5	1292.5	1293.6	1294.6	1295.7	1295.5	1293.8	1292.3
162.5°	1314.0	1312.8	1311.5	1310.3	1311.5	1312.8	1314.0	1315.2	1315.0	1313.2	1311.5
165°	1338.9	1337.6	1336.3	1334.9	1336.3	1337.6	1338.9	1340.1	1339.9	1338.1	1336.3
167.5°	1359.2	1357.8	1356.5	1355.1	1356.5	1357.8	1359.2	1360.5	1360.3	1358.5	1356.7
170°	1370.1	1368.6	1367.0	1365.4	1367.0	1368.6	1370.1	1371.7	1371.5	1369.7	1367.9
172.5°	1378.6	1377.0	1375.4	1373.8	1375.4	1377.0	1378.6	1380.1	1380.0	1378.2	1376.3
175°	1387.8	1386.1	1384.6	1383.0	1384.6	1386.1	1387.8	1389.3	1389.2	1387.4	1385.5
177.5°	1391.0	1389.8	1388.5	1387.3	1388.5	1389.8	1391.0	1392.2	1392.2	1391.0	1389.8
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	573.6	575.6	578.8	582.1	584.1	587.9	589.1	590.9	592.5	596.3	600.4
5°	540.5	543.7	551.3	555.4	561.1	567.7	572.1	576.7	581.8	590.5	598.5
7.5°	504.9	510.3	519.8	527.5	535.6	545.1	552.0	561.1	568.7	581.0	592.7
10°	481.3	488.9	497.4	506.5	518.0	528.1	537.8	549.2	558.4	573.1	586.8
12.5°	460.0	461.1	473.3	483.4	499.1	511.6	522.7	537.5	546.4	563.9	578.3
15°	422.8	429.7	440.7	448.7	467.3	483.1	498.8	514.1	524.4	546.0	565.0
17.5°	391.4	397.8	409.1	422.2	435.6	451.3	471.5	487.8	501.8	526.4	549.0
20°	371.6	379.4	390.9	404.5	416.2	433.3	450.8	469.4	484.5	512.3	538.7
22.5°	354.8	360.9	370.2	383.5	396.3	412.0	431.1	451.4	467.3	497.3	523.9
25°	331.0	336.1	342.0	353.0	367.5	384.8	399.6	421.9	445.0	473.0	505.3
27.5°	309.6	313.3	318.5	328.2	339.4	355.5	372.0	393.1	416.5	446.9	481.0
30°	296.6	298.9	304.2	312.3	323.3	335.9	352.6	372.7	396.7	427.4	461.3
32.5°	285.3	287.3	290.8	298.4	308.0	318.8	333.9	354.1	376.8	407.0	444.6
35°	268.2	269.7	272.8	278.9	284.3	294.8	307.4	325.8	347.1	376.0	415.0
37.5°	251.2	253.4	255.2	257.8	264.6	271.6	282.5	298.0	318.9	348.1	385.3
40°	239.9	241.8	244.6	245.7	251.2	257.4	266.3	280.5	301.6	328.3	364.6
42.5°	228.5	230.5	232.1	233.4	238.1	243.6	251.7	263.9	282.6	308.4	344.4
45°	213.1	213.4	215.0	217.5	219.7	223.7	229.4	239.9	254.4	278.7	311.3
47.5°	197.4	197.7	197.9	199.0	201.6	205.1	208.9	217.5	230.5	249.8	281.6
50°	186.9	186.5	186.9	187.8	189.5	192.5	196.8	203.0	213.6	231.7	260.8
52.5°	176.8	176.8	176.5	176.8	178.1	180.2	183.3	188.5	197.9	214.6	240.2
55°	161.5	160.4	160.6	159.7	161.8	162.2	164.5	168.8	177.1	188.5	212.7
57.5°	145.1	144.2	143.2	142.9	142.7	143.9	145.7	149.2	155.5	165.6	185.1
60°	134.6	133.5	132.1	131.7	131.7	132.4	133.3	135.8	141.8	150.7	166.7
62.5°	124.0	122.7	121.9	120.7	120.3	121.0	121.9	123.7	128.1	136.4	150.3
65°	107.6	105.9	104.8	104.6	104.1	103.5	103.9	105.7	109.2	115.8	126.8
67.5°	91.1	89.6	89.4	88.0	87.4	87.5	87.4	88.9	91.0	96.7	104.9
70°	80.3	79.2	78.7	77.6	77.1	76.6	76.1	77.6	79.6	84.4	91.5
72.5°	69.3	68.3	67.4	66.3	66.4	65.9	65.8	66.8	68.4	72.8	78.4
75°	53.4	53.7	52.5	51.4	51.2	50.7	50.7	51.4	52.1	55.5	59.9
77.5°	38.8	38.6	37.7	37.3	37.1	36.6	37.1	37.5	37.9	40.2	43.3
80°	29.6	29.6	28.5	28.5	28.2	27.6	28.2	27.8	28.7	31.0	33.2
82.5°	21.1	20.8	20.7	20.4	20.3	19.8	20.1	20.6	21.0	22.5	23.9
85°	10.3	10.3	10.1	9.9	10.1	9.9	10.1	10.3	10.5	11.2	12.4
87.5°	10.3	10.6	9.6	8.7	7.5	6.6	5.9	5.5	5.2	4.7	4.2
90°	40.5	41.1	35.3	29.6	23.8	18.1	13.7	10.6	7.5	4.3	1.2
92.5°	37.4	37.3	36.0	34.6	33.2	31.9	30.1	27.8	25.4	23.1	20.9
95°	75.0	75.0	74.5	74.0	73.5	73.0	71.4	68.8	66.2	63.6	61.0
97.5°	126.2	126.2	125.2	124.2	123.2	122.3	120.6	118.4	116.0	113.7	111.5
100°	161.9	161.9	161.1	160.3	159.6	158.8	157.3	155.2	153.2	151.1	149.0
102.5°	200.6	200.4	199.3	198.3	197.4	196.4	195.1	193.4	191.8	190.1	188.4
105°	258.6	258.0	257.5	257.0	256.5	256.0	255.3	254.6	253.8	253.0	252.2
107.5°	321.8	321.6	321.6	321.6	321.6	321.6	321.0	319.9	318.8	317.6	316.5
110°	364.9	364.9	364.9	364.9	364.9	364.9	364.1	362.4	360.9	359.3	357.8



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	408.3	408.9	409.1	409.3	409.5	409.8	409.1	407.5	406.0	404.3	402.8
115°	473.6	473.9	474.4	474.9	475.4	475.9	475.4	473.9	472.3	470.8	469.2
117.5°	537.6	538.2	539.7	541.1	542.6	544.0	543.7	541.6	539.6	537.5	535.3
120°	579.5	579.5	581.6	583.7	585.7	587.8	587.8	585.7	583.7	581.6	579.5
122.5°	623.9	624.5	626.0	627.4	628.9	630.4	629.9	627.3	624.8	622.4	619.9
125°	688.9	689.7	690.5	691.4	692.1	692.9	692.1	689.7	687.4	685.1	682.7
127.5°	752.1	753.1	754.1	755.0	755.9	756.9	755.8	752.9	749.9	746.9	744.0
130°	794.8	795.4	795.9	796.4	796.9	797.4	796.0	792.5	789.2	785.8	782.4
132.5°	837.4	838.5	838.4	838.3	838.2	838.1	836.7	833.8	831.1	828.4	825.6
135°	898.3	898.6	898.1	897.5	897.0	896.5	894.7	891.9	889.1	886.2	883.3
137.5°	957.5	957.7	956.9	956.3	955.6	954.9	953.4	951.1	948.8	946.4	944.0
140°	997.0	997.0	995.8	994.5	993.2	991.9	990.1	987.7	985.3	983.0	980.7
142.5°	1033.0	1032.8	1031.9	1031.0	1030.1	1029.2	1027.5	1025.2	1022.9	1020.6	1018.2
145°	1087.6	1087.4	1085.8	1084.3	1082.7	1081.2	1079.4	1077.6	1075.8	1074.0	1072.2
147.5°	1135.4	1134.8	1133.8	1132.8	1131.7	1130.6	1129.0	1126.8	1124.6	1122.5	1120.2
150°	1165.6	1164.9	1163.8	1162.8	1161.7	1160.6	1159.3	1157.8	1156.2	1154.7	1153.1
152.5°	1195.9	1194.9	1193.7	1192.3	1191.1	1189.8	1188.4	1186.9	1185.3	1183.8	1182.1
155°	1234.2	1232.8	1232.1	1231.3	1230.5	1229.7	1229.0	1228.2	1227.4	1226.6	1225.9
157.5°	1269.4	1267.6	1267.1	1266.7	1266.2	1265.7	1265.3	1264.7	1264.1	1263.6	1263.1
160°	1290.7	1289.2	1288.9	1288.7	1288.4	1288.1	1287.8	1287.2	1286.7	1286.2	1285.7
162.5°	1309.7	1308.0	1307.7	1307.4	1307.2	1306.9	1306.8	1306.6	1306.5	1306.4	1306.3
165°	1334.4	1332.6	1332.6	1332.6	1332.6	1332.6	1332.7	1332.9	1333.2	1333.5	1333.7
167.5°	1354.8	1353.0	1353.0	1353.1	1353.1	1353.2	1353.6	1354.4	1355.1	1355.9	1356.8
170°	1366.0	1364.2	1364.5	1364.7	1365.0	1365.3	1365.8	1366.5	1367.4	1368.2	1369.0
172.5°	1374.5	1372.7	1372.9	1373.2	1373.5	1373.7	1374.2	1375.0	1375.8	1376.6	1377.4
175°	1383.7	1381.8	1382.4	1382.9	1383.4	1383.9	1384.6	1385.3	1386.1	1386.9	1387.8
177.5°	1388.5	1387.3	1387.7	1388.1	1388.5	1388.9	1389.5	1390.1	1390.7	1391.3	1391.9
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	600.1	601.0	603.9	606.8	610.2	611.1	612.5	611.3	610.9	614.3	616.9
5°	601.8	605.8	613.9	621.3	627.4	631.8	636.4	638.2	641.7	646.4	652.5
7.5°	599.8	607.8	620.5	631.2	642.8	651.2	657.7	663.4	670.1	679.2	689.2
10°	597.6	608.3	623.8	636.8	651.1	661.9	670.8	679.5	689.6	702.3	715.3
12.5°	593.6	606.3	625.6	641.1	659.3	669.9	682.0	700.7	711.7	729.2	747.6
15°	585.4	599.7	626.5	645.5	666.2	686.4	708.6	726.5	744.4	754.8	780.6
17.5°	573.4	594.2	624.0	646.2	672.5	704.2	729.2	749.5	770.1	786.9	799.9
20°	563.6	586.3	620.4	646.9	678.1	712.3	740.9	761.6	779.5	793.6	801.5
22.5°	551.4	580.0	613.0	644.2	684.0	717.8	747.9	764.2	779.1	786.0	789.1
25°	532.0	566.4	603.8	641.9	686.8	722.7	750.1	760.0	764.4	757.7	746.7
27.5°	511.1	549.5	593.2	637.5	685.1	719.5	739.2	737.7	730.3	708.7	691.6
30°	495.5	537.8	584.7	633.2	680.9	714.4	725.8	714.4	697.6	673.6	648.9
32.5°	479.2	522.9	575.7	626.9	673.2	702.7	705.1	685.4	659.4	632.1	601.5
35°	454.4	501.7	558.9	613.0	656.8	675.4	664.4	629.4	598.7	561.4	519.6
37.5°	426.5	478.7	535.9	592.6	632.3	637.1	609.8	573.1	529.7	485.7	436.6
40°	405.6	460.9	519.9	576.9	612.1	607.0	572.1	531.8	480.2	426.5	380.8
42.5°	386.9	442.1	502.2	558.3	586.3	572.5	531.8	482.2	426.8	376.2	334.4
45°	354.5	411.3	472.8	526.9	543.0	518.0	464.1	409.0	354.5	312.3	279.2
47.5°	323.0	379.2	440.1	487.7	493.3	459.7	400.8	344.2	297.2	262.9	239.5
50°	299.8	356.3	416.6	459.1	457.2	416.6	356.1	302.2	262.9	235.1	219.5
52.5°	279.1	332.4	390.3	429.0	419.2	375.0	317.1	269.2	237.0	215.3	201.2
55°	246.8	296.2	351.2	382.2	364.3	315.2	266.3	227.8	203.9	187.6	176.6
57.5°	214.8	261.1	308.2	327.3	307.5	262.2	221.5	193.5	175.5	163.5	156.3
60°	195.0	235.4	277.3	293.9	270.2	229.8	197.7	172.8	158.2	148.5	142.0
62.5°	175.2	211.4	251.0	259.9	238.3	204.2	175.7	154.9	143.1	134.3	128.3
65°	148.1	177.8	207.8	213.8	193.9	167.4	145.0	131.5	120.9	114.5	109.7
67.5°	121.6	145.3	166.6	171.4	153.9	135.6	119.4	107.6	100.5	95.1	91.0
70°	105.7	124.6	142.0	145.9	131.9	115.6	103.2	93.8	87.4	82.8	78.9
72.5°	89.1	104.7	119.3	121.9	110.5	98.0	87.9	80.4	74.7	71.8	68.1
75°	68.2	77.4	88.6	89.3	81.7	74.1	66.3	61.5	58.5	54.8	53.0
77.5°	48.1	55.2	61.7	62.9	58.5	53.3	49.0	45.1	42.6	40.9	39.2
80°	36.7	42.4	45.2	46.8	43.6	39.9	37.4	34.8	33.2	32.1	31.0
82.5°	26.3	29.8	32.3	33.6	31.8	29.6	27.2	25.7	24.4	23.5	23.1
85°	13.3	14.9	16.6	17.0	16.6	15.6	14.2	14.2	13.5	13.3	13.3
87.5°	5.5	6.8	7.5	8.6	9.1	10.3	11.4	12.4	13.3	13.0	12.7
90°	4.3	7.5	10.6	13.7	18.1	23.8	29.6	35.3	41.1	40.5	40.0
92.5°	23.1	25.4	27.8	30.1	31.9	33.2	34.6	36.0	37.3	37.4	37.5
95°	63.6	66.2	68.8	71.4	73.0	73.5	74.0	74.5	75.0	75.0	75.0
97.5°	113.7	116.0	118.4	120.6	122.3	123.2	124.2	125.2	126.2	126.2	126.2
100°	151.1	153.2	155.2	157.3	158.8	159.6	160.3	161.1	161.9	161.9	161.9
102.5°	190.1	191.8	193.4	195.1	196.4	197.4	198.3	199.3	200.4	200.6	200.8
105°	253.0	253.8	254.6	255.3	256.0	256.5	257.0	257.5	258.0	258.6	259.1
107.5°	317.6	318.8	319.9	321.0	321.6	321.6	321.6	321.6	321.6	321.8	322.0
110°	359.3	360.9	362.4	364.1	364.9	364.9	364.9	364.9	364.9	364.9	364.9



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	404.3	406.0	407.5	409.1	409.8	409.5	409.3	409.1	408.9	408.3	407.7
115°	470.8	472.3	473.9	475.4	475.9	475.4	474.9	474.4	473.9	473.6	473.4
117.5°	537.5	539.6	541.6	543.7	544.0	542.6	541.1	539.7	538.2	537.6	536.9
120°	581.6	583.7	585.7	587.8	587.8	585.7	583.7	581.6	579.5	579.5	579.5
122.5°	622.4	624.8	627.3	629.9	630.4	628.9	627.4	626.0	624.5	623.9	623.3
125°	685.1	687.4	689.7	692.1	692.9	692.1	691.4	690.5	689.7	688.9	688.2
127.5°	746.9	749.9	752.9	755.8	756.9	755.9	755.0	754.1	753.1	752.1	751.2
130°	785.8	789.2	792.5	796.0	797.4	796.9	796.4	795.9	795.4	794.8	794.3
132.5°	828.4	831.1	833.8	836.7	838.1	838.2	838.3	838.4	838.5	837.4	836.2
135°	886.2	889.1	891.9	894.7	896.5	897.0	897.5	898.1	898.6	898.3	898.1
137.5°	946.4	948.8	951.1	953.4	954.9	955.6	956.3	956.9	957.7	957.5	957.3
140°	983.0	985.3	987.7	990.1	991.9	993.2	994.5	995.8	997.0	997.0	997.0
142.5°	1020.6	1022.9	1025.2	1027.5	1029.2	1030.1	1031.0	1031.9	1032.8	1033.0	1033.2
145°	1074.0	1075.8	1077.6	1079.4	1081.2	1082.7	1084.3	1085.8	1087.4	1087.6	1087.9
147.5°	1122.5	1124.6	1126.8	1129.0	1130.6	1131.7	1132.8	1133.8	1134.8	1135.4	1136.0
150°	1154.7	1156.2	1157.8	1159.3	1160.6	1161.7	1162.8	1163.8	1164.9	1165.6	1166.4
152.5°	1183.8	1185.3	1186.9	1188.4	1189.8	1191.1	1192.3	1193.7	1194.9	1195.9	1196.9
155°	1226.6	1227.4	1228.2	1229.0	1229.7	1230.5	1231.3	1232.1	1232.8	1234.2	1235.5
157.5°	1263.6	1264.1	1264.7	1265.3	1265.7	1266.2	1266.7	1267.1	1267.6	1269.4	1271.1
160°	1286.2	1286.7	1287.2	1287.8	1288.1	1288.4	1288.7	1288.9	1289.2	1290.7	1292.3
162.5°	1306.4	1306.5	1306.6	1306.8	1306.9	1307.2	1307.4	1307.7	1308.0	1309.7	1311.5
165°	1333.5	1333.2	1332.9	1332.7	1332.6	1332.6	1332.6	1332.6	1332.6	1334.4	1336.3
167.5°	1355.9	1355.1	1354.4	1353.6	1353.2	1353.1	1353.1	1353.0	1353.0	1354.8	1356.7
170°	1368.2	1367.4	1366.5	1365.8	1365.3	1365.0	1364.7	1364.5	1364.2	1366.0	1367.9
172.5°	1376.6	1375.8	1375.0	1374.2	1373.7	1373.5	1373.2	1372.9	1372.7	1374.5	1376.3
175°	1386.9	1386.1	1385.3	1384.6	1383.9	1383.4	1382.9	1382.4	1381.8	1383.7	1385.5
177.5°	1391.3	1390.7	1390.1	1389.5	1388.9	1388.5	1388.1	1387.7	1387.3	1388.5	1389.8
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	619.1	621.7	621.7	622.1	625.0	624.6	624.4
5°	658.8	662.8	663.2	667.3	670.0	669.1	666.6
7.5°	696.3	703.6	709.1	712.2	715.8	718.0	717.0
10°	726.1	736.6	743.1	747.4	752.7	756.6	755.2
12.5°	753.1	765.6	774.5	781.9	782.5	787.6	784.2
15°	795.2	808.4	809.8	815.3	819.7	819.2	819.4
17.5°	809.0	813.2	814.2	814.3	814.4	812.7	809.2
20°	804.1	802.4	798.6	795.6	790.3	789.6	785.1
22.5°	780.5	775.5	765.7	759.2	751.0	748.9	747.6
25°	734.4	723.1	707.5	692.6	688.4	680.4	682.7
27.5°	670.9	653.4	636.4	624.4	613.4	601.4	604.8
30°	626.3	606.5	582.7	564.3	552.6	541.2	539.1
32.5°	573.1	544.1	517.6	501.4	483.4	476.2	468.3
35°	481.3	453.0	426.7	403.9	390.9	380.8	371.6
37.5°	398.8	366.3	345.0	326.6	317.1	311.3	312.9
40°	347.6	319.1	303.5	289.5	280.7	276.7	277.6
42.5°	306.1	284.8	272.0	262.4	256.2	253.9	253.4
45°	259.0	247.1	236.5	231.1	228.0	225.5	223.9
47.5°	226.9	217.1	211.2	207.9	205.3	202.8	202.7
50°	207.6	201.2	197.0	193.6	191.6	189.8	191.4
52.5°	192.9	187.0	182.9	179.9	179.0	177.4	177.3
55°	171.2	166.5	163.6	160.8	159.5	158.5	157.3
57.5°	151.3	146.9	144.2	142.5	139.9	139.0	138.6
60°	137.1	133.7	131.0	128.7	127.5	125.7	125.7
62.5°	124.1	120.7	118.2	116.4	114.5	113.8	114.0
65°	105.3	102.5	100.0	98.2	97.8	96.3	96.8
67.5°	88.0	86.1	83.4	82.4	81.6	80.9	80.3
70°	76.3	74.5	73.2	71.8	71.1	71.1	71.1
72.5°	66.7	64.4	63.6	61.9	62.3	61.6	60.8
75°	51.6	50.2	49.6	48.9	47.8	47.8	47.8
77.5°	38.0	37.6	36.8	36.1	35.7	35.5	35.6
80°	29.4	29.1	28.7	28.7	28.2	28.0	27.6
82.5°	22.6	22.0	21.7	21.5	21.4	21.4	21.3
85°	12.8	12.4	12.4	12.6	12.1	12.1	12.4
87.5°	12.8	12.7	12.5	12.6	12.8	12.7	12.7
90°	39.5	39.0	38.9	39.1	39.4	39.6	39.9
92.5°	37.6	37.8	37.8	37.9	37.9	38.0	38.0
95°	75.0	75.0	74.8	74.3	73.8	73.2	72.7
97.5°	126.2	126.2	126.2	126.1	126.1	126.0	126.0
100°	161.9	161.9	161.8	161.5	161.3	161.0	160.7
102.5°	201.0	201.2	201.2	200.9	200.7	200.4	200.2
105°	259.6	260.1	260.4	260.4	260.4	260.4	260.4
107.5°	322.2	322.4	321.9	320.8	319.6	318.4	317.2
110°	364.9	364.9	364.5	363.7	362.8	362.0	361.3



TEST NUMBER: P331277-840

CATALOG NUMBER: S122DIP-S290D1080U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	407.1	406.5	405.9	405.3	404.7	404.1	403.5
115°	473.1	472.8	472.3	471.6	470.8	470.0	469.2
117.5°	536.3	535.7	535.0	534.2	533.4	532.6	531.9
120°	579.5	579.5	579.1	578.3	577.5	576.7	575.9
122.5°	622.7	622.0	621.5	620.9	620.3	619.8	619.1
125°	687.4	686.6	686.1	685.8	685.6	685.3	685.1
127.5°	750.2	749.3	748.4	747.6	746.8	746.0	745.1
130°	793.8	793.2	792.4	791.4	790.3	789.3	788.3
132.5°	835.1	833.9	832.9	832.1	831.2	830.4	829.6
135°	897.8	897.5	897.0	896.2	895.4	894.6	893.8
137.5°	957.0	956.8	956.2	955.1	954.1	953.1	952.0
140°	997.0	997.0	996.5	995.5	994.5	993.4	992.4
142.5°	1033.4	1033.6	1033.2	1032.1	1031.1	1030.1	1029.0
145°	1088.2	1088.4	1088.0	1087.0	1086.0	1084.9	1083.9
147.5°	1136.5	1137.1	1136.9	1135.9	1134.9	1133.9	1133.0
150°	1167.2	1168.0	1168.0	1167.2	1166.4	1165.6	1164.9
152.5°	1197.8	1198.8	1198.8	1197.8	1196.9	1195.9	1194.9
155°	1236.8	1238.1	1238.3	1237.6	1236.8	1236.0	1235.2
157.5°	1272.9	1274.7	1275.0	1273.6	1272.4	1271.2	1269.9
160°	1293.8	1295.5	1295.7	1294.6	1293.6	1292.5	1291.5
162.5°	1313.2	1315.0	1315.2	1314.0	1312.8	1311.5	1310.3
165°	1338.1	1339.9	1340.1	1338.9	1337.6	1336.3	1334.9
167.5°	1358.5	1360.3	1360.5	1359.2	1357.8	1356.5	1355.1
170°	1369.7	1371.5	1371.7	1370.1	1368.6	1367.0	1365.4
172.5°	1378.2	1380.0	1380.1	1378.6	1377.0	1375.4	1373.8
175°	1387.4	1389.2	1389.3	1387.8	1386.1	1384.6	1383.0
177.5°	1391.0	1392.2	1392.2	1391.0	1389.8	1388.5	1387.3
180°	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1	1390.1

(END OF REPORT)