

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332052-927

Luminaire Tested: **S123DIP-S1165D365U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332052-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D365U927-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4756.8 lumens  
Efficiency: N/A  
Efficacy: 95.5 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 49.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

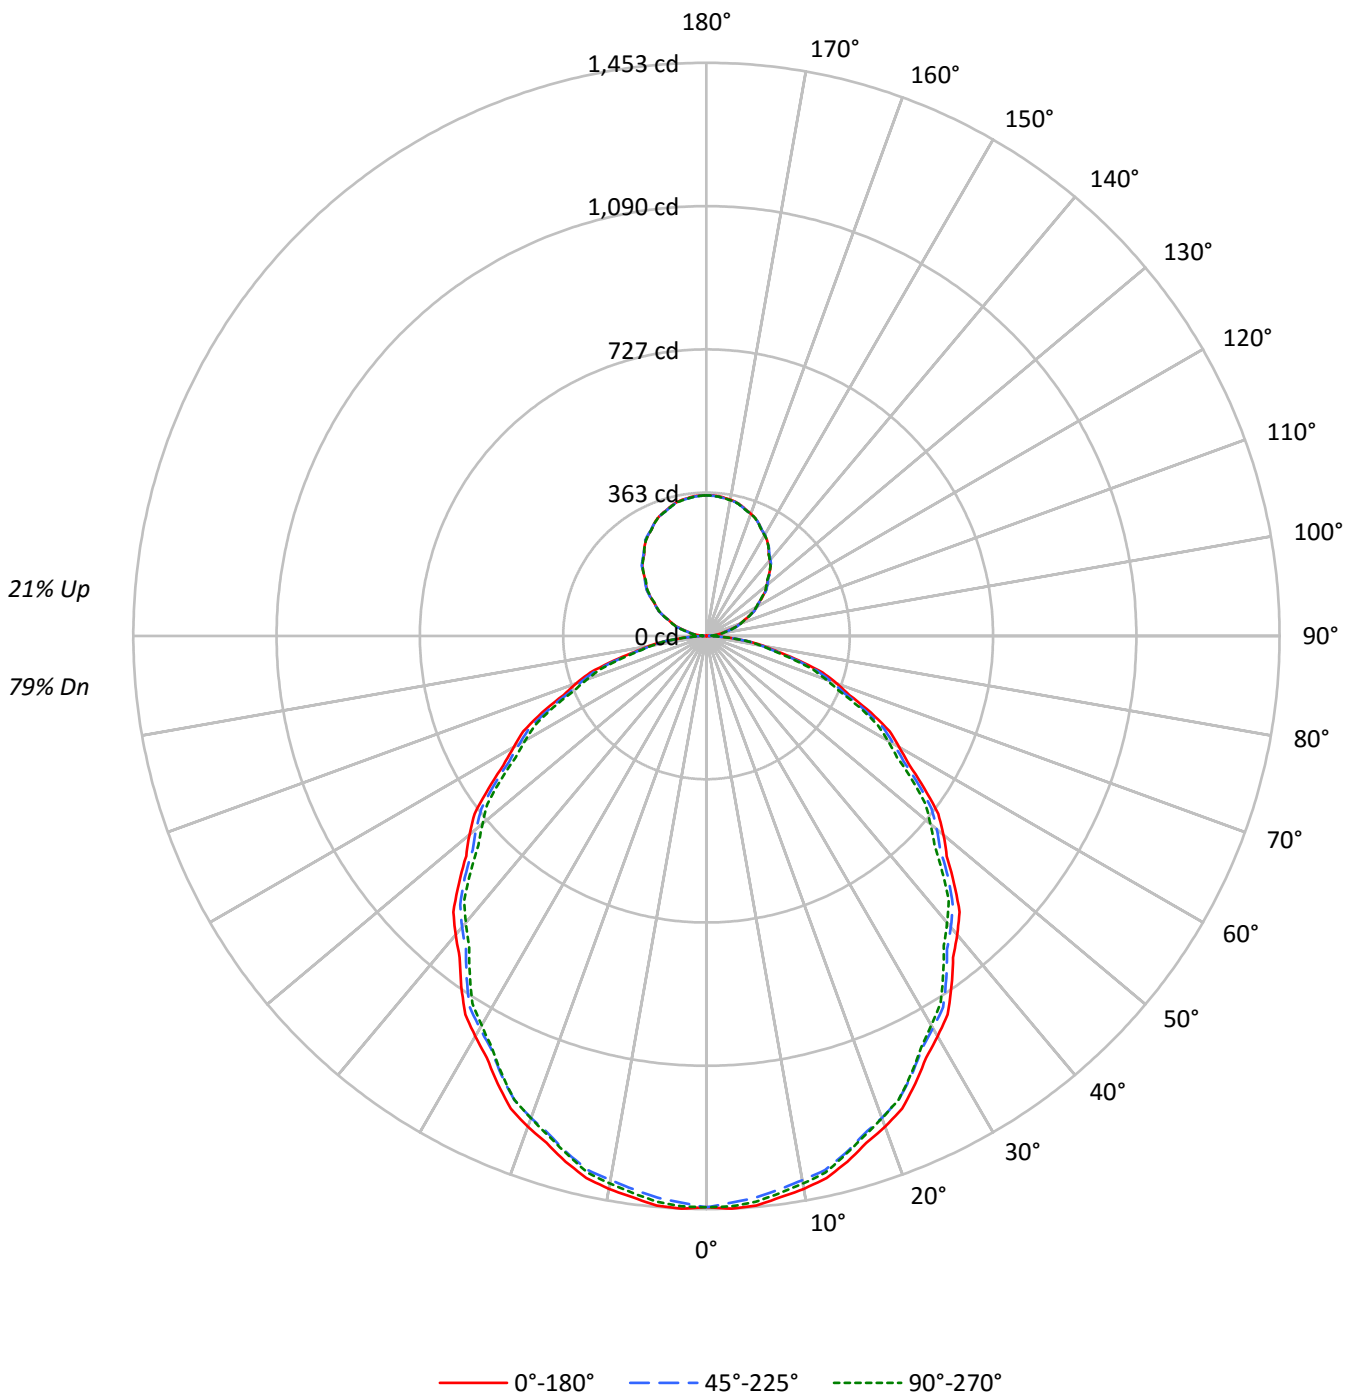



TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	109	109	109	109	100	100	100	91	91	91	83	83	83	79
1	104	100	96	92	99	95	92	88	87	85	82	80	78	76	73	72	70	67
2	95	87	81	75	90	83	78	73	77	72	68	70	67	63	64	61	59	56
3	87	77	69	63	82	73	66	61	68	62	57	62	57	53	57	53	50	47
4	79	68	59	53	75	65	58	52	60	54	49	55	50	46	51	47	43	40
5	73	61	52	46	69	58	50	45	54	47	42	50	44	40	46	41	38	35
6	67	55	46	40	64	53	45	39	49	42	37	45	39	35	42	37	33	31
7	62	49	41	35	59	48	40	34	44	38	33	41	35	31	38	33	30	27
8	58	45	37	31	55	44	36	31	41	34	29	38	32	28	35	30	26	24
9	54	41	33	28	52	40	33	27	37	31	26	35	29	25	32	28	24	22
10	51	38	30	25	49	37	30	25	34	28	24	32	27	23	30	25	22	20

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15588	15588	15588
5°	15662	15446	15554
10°	15557	15312	15407
15°	15375	15139	15166
20°	15163	14892	14905
25°	14878	14598	14567
30°	14564	14270	14162
35°	14236	13925	13745
40°	13893	13543	13333
45°	13516	13192	12871
50°	13137	12762	12407
55°	12643	12314	11941
60°	12144	11795	11418
65°	11703	11227	10878
70°	11053	10581	10112
75°	10098	9736	9320
80°	9106	8722	8647
85°	7991	7694	7385



TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	136.4	2.9
10°-20°	385.2	8.1
20°-30°	569.0	12.0
30°-40°	664.6	14.0
40°-50°	668.2	14.0
50°-60°	587.0	12.3
60°-70°	437.3	9.2
70°-80°	249.1	5.2
80°-90°	72.6	1.5
90°-100°	23.2	0.5
100°-110°	69.5	1.5
110°-120°	118.2	2.5
120°-130°	155.5	3.3
130°-140°	174.7	3.7
140°-150°	171.8	3.6
150°-160°	144.6	3.0
160°-170°	96.3	2.0
170°-180°	33.7	0.7
0°-30°	1090.6	22.9
0°-40°	1755.3	36.9
0°-60°	3010.4	63.3
0°-90°	3769.4	79.2
90°-120°	210.9	4.4
90°-150°	712.8	15.0
90°-180°	987.0	20.7
0°-180°	4756.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1448	1448	1448	1448	1448	
5°	1450	1443	1430	1441	1440	137
15°	1380	1374	1358	1368	1361	389
25°	1253	1245	1229	1230	1226	577
35°	1083	1075	1060	1052	1046	677
45°	888	882	867	852	846	685
55°	674	672	656	643	636	603
65°	460	453	441	431	427	453
75°	243	238	234	228	224	260
85°	65	62	62	60	60	71
90°	0	3	7	8	8	5
95°	17	18	21	22	22	19
105°	63	64	66	66	67	67
115°	119	120	119	120	119	118
125°	174	175	174	173	172	155
135°	226	228	227	226	226	174
145°	274	275	275	275	274	171
155°	314	314	314	315	313	144
165°	342	341	341	342	341	96
175°	356	354	354	356	354	34
180°	356	356	356	356	356	



TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2
2.5°	1453.2	1452.3	1451.4	1450.6	1449.6	1448.0	1445.6	1443.1	1440.7	1438.2	1440.4
5°	1449.5	1448.1	1446.7	1445.3	1443.9	1441.7	1438.7	1435.6	1432.6	1429.5	1432.3
7.5°	1435.3	1433.8	1432.5	1431.1	1429.7	1427.4	1424.3	1421.2	1418.0	1414.8	1417.3
10°	1423.3	1421.9	1420.5	1419.1	1417.8	1415.3	1411.7	1408.1	1404.5	1400.9	1403.4
12.5°	1407.4	1406.2	1405.0	1403.9	1402.7	1400.4	1397.1	1393.7	1390.3	1387.0	1388.8
15°	1379.7	1378.6	1377.5	1376.4	1375.3	1372.9	1369.4	1365.7	1362.2	1358.5	1360.7
17.5°	1347.6	1346.2	1344.7	1343.3	1341.8	1339.3	1335.7	1332.1	1328.5	1324.9	1326.5
20°	1323.7	1322.0	1320.3	1318.7	1317.1	1314.4	1310.8	1307.3	1303.6	1300.1	1301.2
22.5°	1296.8	1295.1	1293.5	1291.8	1290.1	1287.5	1283.9	1280.3	1276.8	1273.1	1274.0
25°	1252.7	1251.0	1249.4	1247.7	1246.1	1243.4	1239.8	1236.3	1232.6	1229.1	1229.3
27.5°	1205.6	1204.0	1202.5	1200.8	1199.2	1196.5	1192.6	1188.7	1184.9	1181.0	1181.2
30°	1171.8	1170.4	1169.0	1167.6	1166.3	1163.6	1159.8	1155.9	1152.0	1148.1	1148.1
32.5°	1137.9	1136.1	1134.2	1132.4	1130.6	1128.1	1125.2	1122.2	1119.2	1116.3	1114.7
35°	1083.4	1081.7	1080.1	1078.4	1076.7	1074.1	1070.5	1066.9	1063.3	1059.7	1058.0
37.5°	1027.5	1025.5	1023.3	1021.3	1019.1	1016.3	1012.6	1009.0	1005.4	1001.6	999.7
40°	988.7	987.1	985.4	983.7	982.1	979.3	975.4	971.5	967.7	963.8	961.6
42.5°	949.8	948.0	946.1	944.2	942.3	939.4	935.6	931.7	927.8	924.0	921.8
45°	887.9	886.8	885.7	884.6	883.4	881.1	877.5	873.9	870.3	866.6	863.4
47.5°	826.3	824.7	823.2	821.5	819.9	817.5	814.0	810.6	807.3	803.9	800.7
50°	784.5	783.2	781.7	780.4	779.0	776.5	772.9	769.3	765.6	762.1	759.1
52.5°	740.7	739.7	738.8	737.8	736.9	734.5	730.7	726.9	723.1	719.2	716.6
55°	673.7	673.4	673.1	672.9	672.6	670.7	667.0	663.5	659.8	656.2	653.2
57.5°	609.9	609.0	608.0	607.1	606.2	604.3	601.3	598.5	595.6	592.7	590.0
60°	564.1	563.8	563.6	563.2	563.0	561.2	557.9	554.5	551.2	547.9	545.4
62.5°	523.2	522.5	521.8	521.1	520.4	518.3	515.0	511.7	508.4	505.1	502.6
65°	459.5	458.1	456.7	455.3	453.9	451.9	449.1	446.3	443.5	440.8	438.6
67.5°	392.0	390.8	389.6	388.3	387.1	385.5	383.3	381.3	379.1	377.1	375.1
70°	351.2	349.5	347.8	346.2	344.5	342.9	341.2	339.5	337.9	336.2	334.3
72.5°	308.3	307.1	305.9	304.7	303.5	301.9	300.0	298.1	296.3	294.4	292.6
75°	242.8	241.7	240.6	239.5	238.4	237.4	236.6	235.8	235.0	234.1	232.7
77.5°	184.8	184.2	183.5	183.0	182.4	181.6	180.5	179.6	178.6	177.6	176.7
80°	146.9	146.1	145.3	144.4	143.6	142.9	142.4	141.8	141.2	140.7	140.5
82.5°	110.1	109.9	109.7	109.6	109.4	109.2	109.2	109.1	108.9	108.8	108.4
85°	64.7	64.2	63.6	63.1	62.5	62.3	62.3	62.3	62.3	62.3	61.7
87.5°	26.0	25.4	24.9	24.3	23.8	23.5	23.4	23.4	23.3	23.3	23.1
90°	0.3	0.9	1.5	2.1	2.8	3.5	4.3	5.1	5.9	6.7	7.0
92.5°	6.8	7.2	7.6	8.1	8.5	8.9	9.3	9.8	10.3	10.8	10.9
95°	16.6	17.0	17.3	17.8	18.2	18.7	19.3	19.7	20.2	20.8	21.0
97.5°	29.3	29.6	30.0	30.3	30.7	31.0	31.4	31.7	32.1	32.4	32.7
100°	38.1	38.4	38.8	39.2	39.5	39.9	40.2	40.6	40.9	41.1	41.4
102.5°	48.2	48.4	48.6	48.8	49.0	49.4	49.7	50.2	50.6	51.0	51.2
105°	63.0	63.1	63.2	63.4	63.5	63.8	64.4	65.0	65.5	66.1	66.1
107.5°	80.2	80.3	80.4	80.5	80.6	80.6	80.9	81.1	81.4	81.6	81.8
110°	91.0	91.1	91.3	91.3	91.5	91.6	91.7	91.9	92.0	92.1	92.4



TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	102.2	102.3	102.3	102.4	102.5	102.5	102.6	102.6	102.6	102.7	102.9
115°	119.0	119.1	119.4	119.5	119.7	119.8	119.6	119.5	119.4	119.2	119.3
117.5°	135.9	136.0	136.2	136.3	136.4	136.3	136.2	136.0	135.9	135.7	135.7
120°	146.4	146.8	147.2	147.5	147.9	147.9	147.7	147.3	147.0	146.7	146.6
122.5°	157.4	157.6	158.0	158.2	158.5	158.5	158.4	158.2	158.0	157.9	157.7
125°	174.1	174.3	174.5	174.7	174.9	174.9	174.8	174.7	174.5	174.4	174.1
127.5°	189.6	190.0	190.4	190.8	191.2	191.3	191.2	191.0	190.9	190.8	190.4
130°	199.9	200.3	200.9	201.4	201.8	202.0	201.8	201.7	201.5	201.3	201.1
132.5°	210.2	210.7	211.2	211.7	212.1	212.4	212.2	212.1	211.9	211.8	211.5
135°	225.9	226.3	226.6	227.0	227.4	227.6	227.5	227.4	227.4	227.4	227.0
137.5°	240.5	240.8	241.1	241.4	241.7	241.9	242.1	242.2	242.4	242.6	242.3
140°	250.6	250.9	251.2	251.5	251.8	252.0	252.1	252.1	252.2	252.2	252.2
142.5°	259.8	260.1	260.4	260.7	260.9	261.2	261.3	261.4	261.5	261.7	261.6
145°	274.1	274.2	274.3	274.4	274.6	274.7	274.9	275.1	275.3	275.4	275.4
147.5°	286.6	286.8	287.1	287.3	287.5	287.7	287.9	288.0	288.2	288.4	288.4
150°	295.3	295.5	295.6	295.7	295.9	296.0	296.1	296.2	296.4	296.4	296.4
152.5°	302.5	302.7	302.9	303.0	303.2	303.3	303.4	303.5	303.6	303.6	303.7
155°	313.9	313.9	313.9	313.9	313.9	313.9	313.9	313.9	314.0	314.1	314.3
157.5°	323.4	323.4	323.3	323.2	323.1	323.1	323.2	323.2	323.3	323.4	323.6
160°	329.5	329.4	329.2	329.2	329.0	328.9	328.9	328.9	328.9	328.9	329.2
162.5°	334.9	334.7	334.5	334.4	334.1	334.1	334.1	334.2	334.3	334.3	334.6
165°	341.8	341.7	341.4	341.3	341.0	341.0	341.0	341.0	341.0	341.0	341.4
167.5°	347.4	347.1	346.9	346.6	346.3	346.3	346.3	346.3	346.4	346.5	346.8
170°	350.5	350.2	350.0	349.7	349.5	349.4	349.4	349.4	349.4	349.4	349.8
172.5°	353.0	352.7	352.4	352.2	352.0	351.8	351.8	351.8	351.8	351.8	352.2
175°	355.5	355.3	355.1	354.8	354.6	354.4	354.4	354.4	354.4	354.4	354.8
177.5°	356.6	356.4	356.2	356.0	355.8	355.7	355.7	355.7	355.7	355.7	356.0
180°	356.4	356.4	356.4	356.4	356.4	356.4	356.4	356.4	356.4	356.4	356.4



TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2	1448.2
2.5°	1442.6	1444.9	1447.1	1448.1	1447.9	1447.6	1447.4	1447.2
5°	1435.0	1437.8	1440.6	1441.7	1441.1	1440.6	1440.0	1439.5
7.5°	1419.8	1422.3	1424.8	1425.8	1425.5	1425.2	1424.9	1424.6
10°	1405.9	1408.3	1410.9	1411.8	1411.3	1410.7	1410.2	1409.6
12.5°	1390.6	1392.4	1394.2	1395.0	1394.6	1394.3	1394.0	1393.7
15°	1362.9	1365.2	1367.4	1367.7	1366.0	1364.4	1362.7	1361.0
17.5°	1328.0	1329.6	1331.1	1331.6	1331.0	1330.4	1329.8	1329.2
20°	1302.3	1303.4	1304.5	1304.6	1303.8	1302.9	1302.1	1301.2
22.5°	1274.9	1275.8	1276.7	1276.6	1275.6	1274.5	1273.4	1272.4
25°	1229.6	1229.9	1230.2	1229.9	1229.1	1228.2	1227.4	1226.5
27.5°	1181.5	1181.6	1181.9	1181.5	1180.4	1179.3	1178.3	1177.3
30°	1148.1	1148.1	1148.1	1147.2	1145.2	1143.3	1141.3	1139.4
32.5°	1113.1	1111.6	1110.0	1108.7	1107.7	1106.6	1105.6	1104.5
35°	1056.4	1054.7	1053.0	1051.5	1050.1	1048.8	1047.3	1046.0
37.5°	997.7	995.7	993.7	992.3	991.3	990.5	989.6	988.7
40°	959.4	957.2	955.0	953.3	952.2	951.1	950.0	948.9
42.5°	919.6	917.3	915.1	913.5	912.4	911.2	910.1	909.0
45°	860.1	856.7	853.4	851.0	849.7	848.3	846.9	845.5
47.5°	797.4	794.2	790.8	788.6	787.4	786.2	785.0	783.8
50°	756.0	753.0	749.9	747.6	745.9	744.3	742.6	740.9
52.5°	714.1	711.5	708.8	706.7	705.0	703.4	701.7	700.1
55°	650.1	647.1	644.0	641.8	640.5	639.1	637.7	636.3
57.5°	587.3	584.6	581.9	579.7	578.1	576.6	574.9	573.3
60°	543.0	540.4	538.0	536.0	534.6	533.2	531.9	530.4
62.5°	500.1	497.6	495.1	493.4	492.4	491.5	490.6	489.6
65°	436.4	434.2	432.0	430.5	429.6	428.8	427.9	427.1
67.5°	373.2	371.2	369.3	367.7	366.6	365.4	364.2	363.1
70°	332.3	330.4	328.4	326.8	325.4	324.0	322.7	321.3
72.5°	291.0	289.2	287.5	286.3	285.6	284.9	284.2	283.4
75°	231.3	230.0	228.5	227.4	226.6	225.8	225.0	224.1
77.5°	175.7	174.8	173.8	173.3	173.3	173.3	173.3	173.3
80°	140.1	139.9	139.6	139.5	139.5	139.5	139.5	139.5
82.5°	107.8	107.3	106.9	106.5	106.2	106.1	105.8	105.6
85°	61.2	60.6	60.0	59.8	59.8	59.8	59.8	59.8
87.5°	22.9	22.7	22.6	22.5	22.5	22.6	22.6	22.6
90°	7.2	7.4	7.7	7.9	8.0	8.2	8.2	8.4
92.5°	11.2	11.3	11.6	11.6	11.6	11.5	11.4	11.3
95°	21.2	21.5	21.7	21.9	21.9	21.9	21.9	21.9
97.5°	33.0	33.3	33.6	33.7	33.7	33.7	33.6	33.6
100°	41.5	41.7	41.9	42.1	42.1	42.3	42.5	42.5
102.5°	51.4	51.6	51.7	51.8	51.8	51.8	51.7	51.7
105°	66.1	66.1	66.1	66.1	66.2	66.4	66.5	66.6
107.5°	82.0	82.1	82.4	82.5	82.4	82.3	82.2	82.1
110°	92.6	92.8	93.1	93.2	93.0	92.9	92.8	92.7





TEST NUMBER: P332052-927

CATALOG NUMBER: S123DIP-S1165D365U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	103.2	103.5	103.9	103.9	103.9	103.9	103.9	103.9
115°	119.4	119.5	119.5	119.5	119.5	119.4	119.3	119.2
117.5°	135.7	135.7	135.7	135.5	135.4	135.2	135.1	134.9
120°	146.6	146.5	146.5	146.3	146.2	146.1	146.0	145.8
122.5°	157.6	157.4	157.2	157.1	156.9	156.7	156.5	156.4
125°	173.9	173.6	173.4	173.2	172.9	172.7	172.4	172.1
127.5°	190.0	189.7	189.3	189.0	188.8	188.5	188.2	187.9
130°	200.8	200.5	200.3	199.9	199.6	199.1	198.7	198.2
132.5°	211.2	210.9	210.6	210.3	209.9	209.6	209.3	209.0
135°	226.8	226.6	226.3	226.2	226.0	225.9	225.8	225.6
137.5°	242.1	241.9	241.5	241.3	241.1	240.8	240.6	240.3
140°	252.1	252.1	252.0	251.8	251.3	250.9	250.4	250.0
142.5°	261.5	261.4	261.4	261.2	260.9	260.5	260.2	259.8
145°	275.4	275.3	275.2	275.0	274.8	274.6	274.3	274.1
147.5°	288.4	288.4	288.4	288.2	287.9	287.5	287.1	286.7
150°	296.4	296.4	296.4	296.3	295.9	295.6	295.2	294.8
152.5°	303.8	304.0	304.0	303.9	303.6	303.2	302.9	302.6
155°	314.6	314.8	315.1	315.0	314.6	314.1	313.7	313.2
157.5°	323.8	324.2	324.4	324.3	324.0	323.7	323.3	323.0
160°	329.5	329.9	330.2	330.2	329.9	329.7	329.5	329.2
162.5°	334.9	335.3	335.6	335.5	335.1	334.7	334.3	333.9
165°	341.7	342.1	342.5	342.5	342.0	341.6	341.1	340.7
167.5°	347.2	347.6	348.0	348.0	347.6	347.2	346.8	346.5
170°	350.2	350.7	351.1	351.1	350.7	350.2	349.8	349.4
172.5°	352.6	353.0	353.4	353.4	352.9	352.5	352.0	351.6
175°	355.1	355.5	355.9	355.8	355.5	355.0	354.6	354.1
177.5°	356.3	356.6	356.9	356.9	356.6	356.2	355.8	355.5
180°	356.4	356.4	356.4	356.4	356.4	356.4	356.4	356.4

(END OF REPORT)