

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331920-927

Luminaire Tested: **S123DIP-S560D585U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331920-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D585U927-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3485.5 lumens
Efficiency: N/A
Efficacy: 106.3 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 32.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

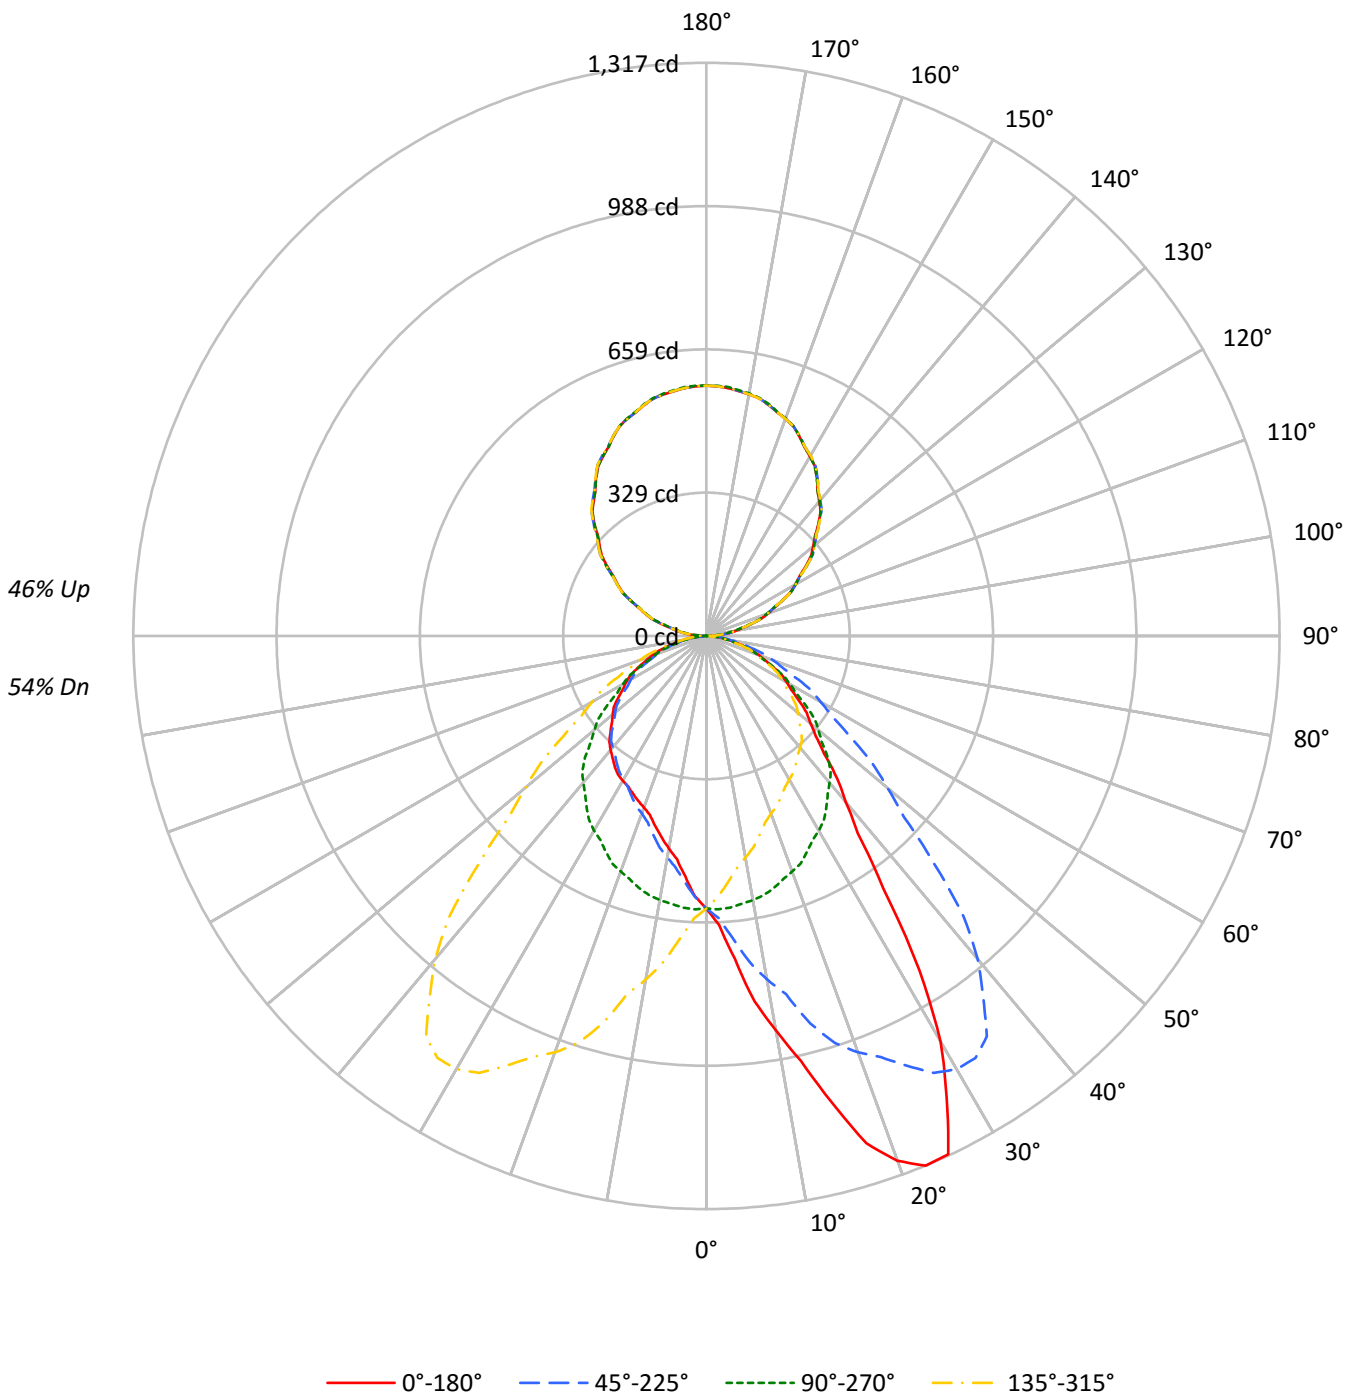



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	54	52	51	46
2	90	83	77	72	84	77	72	68	67	63	59	57	54	51	47	45	44	39
3	83	73	66	60	76	68	62	57	59	54	50	50	47	44	42	40	37	34
4	76	65	57	51	70	61	54	48	53	47	43	45	41	38	38	35	32	29
5	70	58	50	44	64	54	47	42	47	41	37	40	36	33	34	31	28	25
6	64	52	44	38	59	49	42	36	43	37	33	37	32	29	31	28	25	22
7	59	47	39	34	55	44	37	32	39	33	29	33	29	25	28	25	22	20
8	55	43	35	30	51	40	33	28	35	30	26	31	26	23	26	23	20	18
9	51	39	32	27	48	37	30	25	32	27	23	28	24	20	24	21	18	16
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	6740	6740	6740	6740
5°	8038	6769	5999	6769
10°	10061	6735	5418	6735
15°	12340	6681	5045	6681
20°	14701	6596	4803	6596
25°	15610	6494	4749	6494
30°	13380	6418	4774	6418
35°	9305	6311	4824	6311
40°	7009	6185	4808	6185
45°	5820	5999	4748	5999
50°	5213	5620	4706	5620
55°	4874	5210	4647	5210
60°	4573	4781	4598	4781
65°	4297	4358	4452	4358
70°	4028	3877	4239	3877
75°	3606	3394	3889	3394
80°	3155	2783	3347	2783
85°	2470	2025	2248	2025



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.7	1.8
10°-20°	197.8	5.7
20°-30°	332.0	9.5
30°-40°	375.9	10.8
40°-50°	337.1	9.7
50°-60°	272.0	7.8
60°-70°	189.6	5.4
70°-80°	99.6	2.9
80°-90°	26.1	0.7
90°-100°	37.5	1.1
100°-110°	112.2	3.2
110°-120°	190.8	5.5
120°-130°	250.9	7.2
130°-140°	282.0	8.1
140°-150°	277.2	8.0
150°-160°	233.4	6.7
160°-170°	155.4	4.5
170°-180°	54.4	1.6
0°-30°	591.5	17.0
0°-40°	967.4	27.8
0°-60°	1576.5	45.2
0°-90°	1891.8	54.3
90°-120°	340.4	9.8
90°-150°	1150.6	33.0
90°-180°	1594.0	45.7
0°-180°	3485.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	626	626	626	626	626	
5°	744	626	555	626	744	77
15°	1107	600	453	600	1107	320
25°	1314	547	400	547	1314	576
35°	708	480	367	480	708	460
45°	382	394	312	394	382	303
55°	260	278	248	278	260	233
65°	169	171	175	171	169	168
75°	87	82	94	82	87	93
85°	20	16	18	16	20	24
90°	14	0	14	0	14	8
95°	35	27	35	27	35	36
105°	108	102	108	102	108	114
115°	192	192	192	192	192	191
125°	278	281	278	281	278	248
135°	364	365	364	365	364	280
145°	442	442	442	442	442	276
155°	506	506	506	506	506	233
165°	550	552	550	552	550	155
175°	572	574	572	574	572	54
180°	575	575	575	575	575	



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	664.6	664.1	662.9	663.8	661.9	659.3	659.0	656.6	649.5	649.0	647.1
5°	743.9	741.5	741.2	740.9	736.7	730.9	719.9	719.1	704.5	697.2	688.4
7.5°	846.8	848.0	843.6	839.7	826.7	818.2	806.4	791.5	773.6	755.4	743.3
10°	920.5	930.5	918.1	909.6	901.7	886.8	869.6	848.0	826.5	801.3	782.2
12.5°	999.7	1004.6	1002.1	994.0	981.8	959.2	928.5	904.8	884.9	843.0	826.1
15°	1107.4	1125.9	1114.1	1086.8	1087.4	1065.9	1025.8	981.8	958.5	921.7	871.6
17.5°	1222.3	1224.6	1219.5	1196.7	1181.5	1152.0	1115.0	1072.9	1025.5	981.1	928.0
20°	1283.4	1281.6	1271.0	1259.1	1233.0	1210.0	1169.6	1122.6	1061.9	1018.2	960.3
22.5°	1317.4	1314.3	1309.3	1299.4	1277.7	1252.9	1216.7	1165.3	1107.6	1047.3	980.4
25°	1314.3	1318.3	1318.9	1316.1	1308.6	1293.7	1265.2	1224.2	1166.6	1089.3	1019.5
27.5°	1195.4	1200.9	1217.2	1231.6	1247.7	1264.0	1261.9	1241.5	1198.9	1132.0	1046.7
30°	1076.5	1064.3	1094.4	1132.3	1158.1	1203.6	1229.1	1230.6	1206.7	1149.3	1066.1
32.5°	911.4	924.8	938.0	984.7	1041.1	1092.2	1142.9	1183.8	1188.4	1150.2	1077.5
35°	708.1	724.8	749.1	773.4	834.1	886.2	975.4	1053.1	1115.0	1123.2	1078.6
37.5°	570.6	578.9	594.2	618.5	658.2	720.2	789.2	887.3	977.0	1043.7	1046.6
40°	498.8	501.2	518.5	537.0	569.2	620.1	682.4	769.1	876.5	969.7	1008.5
42.5°	444.9	450.3	457.6	475.4	501.0	539.3	597.1	668.9	767.3	874.5	950.5
45°	382.3	388.3	392.9	404.7	422.9	448.7	489.1	554.6	629.5	740.3	842.6
47.5°	340.9	341.4	344.8	353.7	366.1	385.5	414.0	456.1	524.9	614.7	719.7
50°	311.3	316.2	317.3	324.3	334.1	348.3	372.0	407.7	464.2	543.1	639.6
52.5°	290.4	291.8	295.2	300.3	308.8	319.9	340.4	368.4	412.7	480.0	568.7
55°	259.7	259.7	263.1	267.0	271.9	281.9	295.5	316.2	349.8	402.0	475.5
57.5°	231.3	232.8	235.2	236.4	240.5	247.2	258.6	274.3	299.4	339.5	397.9
60°	212.4	215.1	214.8	217.2	220.9	226.0	235.8	248.5	270.9	303.1	352.3
62.5°	195.9	195.7	195.7	198.5	202.2	207.1	213.4	224.4	243.5	272.0	313.9
65°	168.7	168.1	170.2	172.1	173.3	176.9	181.7	191.5	204.2	225.5	257.9
67.5°	144.6	142.8	143.9	144.6	146.6	149.5	154.0	160.0	170.2	187.2	211.7
70°	128.0	126.5	126.2	126.8	128.7	130.8	134.1	139.9	149.2	163.0	180.9
72.5°	111.1	110.0	110.0	111.3	112.2	113.5	115.9	121.2	128.7	138.9	155.6
75°	86.7	86.7	86.7	87.1	88.0	89.2	91.0	93.7	99.5	106.8	118.0
77.5°	65.0	65.0	64.6	64.6	65.9	66.5	66.9	69.4	72.6	77.6	85.7
80°	50.9	49.4	50.1	50.9	51.6	51.9	52.8	53.4	56.2	58.9	64.6
82.5°	37.9	36.6	36.7	38.1	38.3	38.5	39.5	40.3	41.4	43.8	46.9
85°	20.0	20.0	20.4	20.4	20.6	20.4	21.2	21.5	21.5	23.1	24.9
87.5°	10.0	9.5	9.7	9.9	9.6	9.7	9.9	10.1	10.3	10.5	10.4
90°	13.5	13.4	13.2	13.0	12.8	12.4	12.0	11.6	11.2	10.9	9.5
92.5°	18.2	18.4	18.5	18.6	18.8	18.6	18.3	18.0	17.7	17.3	16.6
95°	35.3	35.3	35.3	35.3	35.3	35.0	34.6	34.2	33.8	33.4	32.6
97.5°	54.2	54.3	54.3	54.3	54.3	54.2	53.7	53.2	52.8	52.4	51.7
100°	68.7	68.4	68.3	68.0	67.9	67.7	67.3	67.0	66.7	66.4	65.9
102.5°	83.5	83.6	83.6	83.7	83.7	83.5	83.3	82.9	82.6	82.3	81.7
105°	107.6	107.3	107.1	106.9	106.7	106.6	106.6	106.6	106.6	106.6	105.8
107.5°	132.6	132.7	132.8	132.9	133.1	132.9	132.6	132.3	132.0	131.7	131.3
110°	149.6	149.8	150.0	150.2	150.4	150.3	149.9	149.5	149.1	148.7	148.5



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	167.6	167.7	167.7	167.8	167.8	167.5	167.1	166.6	166.1	165.6	165.6
115°	192.5	192.6	192.7	192.8	192.9	192.9	192.8	192.7	192.6	192.5	192.7
117.5°	217.7	218.0	218.2	218.6	218.8	219.0	219.0	219.0	219.0	219.0	219.4
120°	235.4	235.6	235.8	236.0	236.2	236.4	236.5	236.5	236.7	236.8	237.3
122.5°	252.4	252.7	252.9	253.3	253.5	253.8	254.1	254.3	254.6	254.8	255.1
125°	277.9	278.3	278.7	279.1	279.5	279.9	280.3	280.7	281.1	281.5	281.7
127.5°	303.2	303.7	304.2	304.7	305.1	305.6	306.2	306.7	307.4	307.9	308.1
130°	319.9	320.6	321.3	322.0	322.7	323.3	323.7	324.1	324.5	324.9	325.2
132.5°	337.2	337.8	338.3	338.9	339.5	339.9	340.4	340.9	341.4	341.9	342.1
135°	364.2	364.4	364.6	364.8	365.0	365.3	365.7	366.1	366.5	366.9	367.0
137.5°	387.9	388.3	388.7	389.1	389.5	389.9	390.3	390.7	391.2	391.6	391.3
140°	403.5	404.2	404.9	405.6	406.3	406.7	406.8	406.9	407.0	407.1	407.0
142.5°	419.4	419.9	420.5	421.0	421.6	421.9	422.0	422.1	422.2	422.3	422.2
145°	442.4	442.8	443.1	443.5	443.9	444.3	444.3	444.4	444.5	444.7	444.3
147.5°	462.8	463.4	464.0	464.6	465.2	465.5	465.5	465.5	465.5	465.5	465.2
150°	475.8	476.4	477.0	477.6	478.2	478.5	478.5	478.5	478.5	478.5	478.3
152.5°	488.5	489.0	489.5	490.0	490.5	490.8	490.6	490.4	490.2	490.0	490.0
155°	505.6	506.4	507.0	507.7	508.4	508.6	508.2	507.8	507.4	507.0	506.9
157.5°	521.3	521.8	522.4	522.9	523.5	523.6	523.2	522.8	522.3	521.9	521.8
160°	531.4	531.8	532.2	532.6	533.0	532.9	532.4	532.0	531.4	530.9	530.9
162.5°	539.0	539.6	540.3	540.9	541.5	541.6	541.1	540.6	540.1	539.6	539.6
165°	549.9	550.6	551.3	552.0	552.7	552.8	552.2	551.6	551.0	550.3	550.3
167.5°	559.2	559.8	560.5	561.1	561.7	561.7	561.1	560.5	559.8	559.2	559.1
170°	563.9	564.6	565.3	566.0	566.7	566.7	566.0	565.3	564.6	563.9	563.9
172.5°	567.5	568.2	568.9	569.7	570.4	570.4	569.7	569.1	568.5	567.9	567.9
175°	571.6	572.3	573.0	573.7	574.4	574.5	573.9	573.2	572.7	572.0	572.0
177.5°	573.8	574.3	574.9	575.4	576.0	576.1	575.6	575.1	574.6	574.1	574.1
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	645.6	643.7	641.7	638.3	635.4	631.3	630.1	628.7	624.3	620.4	617.5
5°	685.1	677.8	667.2	657.4	649.6	639.0	632.9	626.5	617.4	609.3	602.5
7.5°	726.4	712.0	695.5	677.7	661.1	645.0	632.1	620.6	607.8	595.7	586.4
10°	759.1	738.5	715.4	690.5	669.3	648.6	631.4	616.2	599.8	585.6	573.7
12.5°	796.5	765.9	734.1	703.9	678.7	650.1	629.2	609.9	591.4	574.2	560.9
15°	840.7	801.9	764.3	722.7	684.4	648.6	623.8	599.5	578.0	560.4	543.4
17.5°	881.0	837.0	787.4	736.9	690.8	648.3	613.5	586.1	559.1	537.6	520.6
20°	903.8	853.7	797.6	745.1	694.2	646.8	608.6	575.8	546.8	523.9	504.9
22.5°	923.5	864.9	806.8	750.8	694.0	642.9	599.7	565.9	534.3	512.1	491.8
25°	943.9	873.8	815.6	749.7	686.3	633.5	584.9	546.8	515.2	489.1	468.2
27.5°	961.4	873.2	804.1	733.2	674.3	621.4	569.6	528.5	495.0	466.7	445.4
30°	973.0	874.4	792.2	722.1	662.7	608.0	557.6	516.4	481.2	452.3	432.4
32.5°	980.3	873.7	781.3	706.5	644.2	595.9	544.8	502.1	465.9	437.6	418.3
35°	984.5	868.3	762.5	674.5	614.4	567.4	524.6	480.3	442.4	416.0	394.1
37.5°	976.0	857.1	740.6	643.5	577.7	531.5	495.4	457.7	421.4	392.4	373.5
40°	962.7	849.9	723.6	621.7	552.5	507.9	477.3	440.2	404.4	376.8	359.3
42.5°	937.2	835.0	705.0	597.4	526.2	481.6	453.4	422.6	388.6	362.7	345.2
45°	875.0	802.8	676.9	561.0	487.6	441.5	416.6	394.1	363.5	338.3	323.1
47.5°	788.7	754.3	636.4	522.6	447.2	402.8	376.9	358.9	336.4	316.2	301.6
50°	728.8	714.5	609.0	496.4	420.2	376.8	352.0	335.6	319.5	299.1	285.8
52.5°	659.6	668.4	576.9	469.2	392.8	350.1	326.7	313.7	299.1	282.4	270.8
55°	562.2	594.1	521.6	423.6	352.0	311.3	289.1	277.6	269.1	256.7	246.7
57.5°	471.0	511.5	461.7	376.5	311.8	276.8	255.6	243.0	237.5	231.0	223.2
60°	416.8	456.9	419.0	345.0	284.9	251.5	232.7	222.1	216.7	212.1	205.4
62.5°	368.6	409.1	377.2	312.9	258.4	227.5	211.1	200.7	196.5	194.1	188.4
65°	302.2	337.1	315.8	263.1	220.5	193.3	178.4	171.1	167.2	166.3	162.6
67.5°	246.0	272.5	257.1	218.2	184.7	161.1	148.5	142.4	139.3	139.0	136.3
70°	209.1	233.9	222.1	186.9	158.0	139.6	128.7	123.2	121.4	121.0	119.5
72.5°	180.4	197.7	188.4	159.0	136.7	119.9	111.9	106.2	104.1	104.6	103.5
75°	133.5	146.6	141.1	120.7	102.8	91.9	85.2	81.6	79.8	80.7	79.5
77.5°	96.1	104.3	99.4	85.3	74.3	66.4	61.5	59.3	57.6	57.5	57.0
80°	72.5	77.4	74.6	66.1	57.0	50.4	46.4	44.9	44.0	43.7	43.4
82.5°	51.7	55.8	52.5	46.7	40.6	36.5	34.3	32.3	31.6	31.8	31.5
85°	26.1	27.6	26.4	22.7	20.4	18.5	17.3	16.4	15.8	16.1	15.4
87.5°	10.6	10.6	9.6	8.4	7.8	6.8	6.6	5.9	5.6	5.9	5.8
90°	8.2	6.9	5.6	4.4	3.5	2.5	1.4	0.5	1.4	2.5	3.5
92.5°	15.8	15.1	14.4	13.7	13.0	12.3	11.6	10.9	11.6	12.3	13.0
95°	31.8	31.1	30.3	29.5	28.8	28.0	27.3	26.7	27.3	28.0	28.8
97.5°	51.2	50.5	50.0	49.4	49.0	48.4	47.8	47.4	47.8	48.4	49.0
100°	65.4	64.9	64.4	63.8	63.3	62.7	62.0	61.5	62.0	62.7	63.3
102.5°	81.0	80.3	79.7	79.1	78.8	78.4	78.1	77.7	78.1	78.4	78.8
105°	104.8	103.9	103.0	102.5	102.3	102.0	101.9	101.6	101.9	102.0	102.3
107.5°	130.9	130.6	130.2	130.0	129.8	129.8	129.6	129.5	129.6	129.8	129.8
110°	148.3	148.1	147.8	147.7	147.4	147.3	147.0	146.9	147.0	147.3	147.4



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	165.6	165.6	165.5	165.4	165.2	165.2	165.0	164.9	165.0	165.2	165.2
115°	192.9	193.1	193.3	193.2	193.0	192.7	192.3	192.0	192.3	192.7	193.0
117.5°	219.6	219.8	220.1	220.1	219.9	219.8	219.5	219.4	219.5	219.8	219.9
120°	237.8	238.3	238.8	238.8	238.1	237.5	236.9	236.3	236.9	237.5	238.1
122.5°	255.4	255.6	255.9	255.8	255.3	254.9	254.4	254.1	254.4	254.9	255.3
125°	281.9	282.1	282.3	282.3	281.9	281.6	281.4	281.1	281.4	281.6	281.9
127.5°	308.3	308.6	308.8	308.6	307.9	307.3	306.7	306.0	306.7	307.3	307.9
130°	325.5	325.8	326.1	325.8	325.0	324.2	323.4	322.7	323.4	324.2	325.0
132.5°	342.3	342.5	342.8	342.5	341.7	340.9	340.1	339.2	340.1	340.9	341.7
135°	367.1	367.2	367.3	367.0	366.5	365.8	365.3	364.6	365.3	365.8	366.5
137.5°	391.0	390.8	390.5	390.1	389.7	389.1	388.6	388.2	388.6	389.1	389.7
140°	406.9	406.8	406.7	406.4	405.9	405.4	404.9	404.4	404.9	405.4	405.9
142.5°	421.9	421.8	421.6	421.2	420.7	420.3	419.7	419.2	419.7	420.3	420.7
145°	444.0	443.7	443.4	443.1	443.0	442.8	442.6	442.4	442.6	442.8	443.0
147.5°	464.9	464.7	464.4	464.1	463.7	463.3	463.0	462.6	463.0	463.3	463.7
150°	478.1	477.9	477.7	477.5	477.3	477.1	476.9	476.7	476.9	477.1	477.3
152.5°	489.8	489.7	489.6	489.4	489.1	488.9	488.5	488.3	488.5	488.9	489.1
155°	506.8	506.7	506.6	506.5	506.5	506.5	506.5	506.5	506.5	506.5	506.5
157.5°	521.7	521.7	521.6	521.6	521.7	521.8	522.0	522.0	522.0	521.8	521.7
160°	530.9	530.9	530.9	531.0	531.2	531.4	531.6	531.8	531.6	531.4	531.2
162.5°	539.5	539.4	539.3	539.4	539.6	540.0	540.2	540.5	540.2	540.0	539.6
165°	550.3	550.3	550.3	550.5	550.8	551.1	551.4	551.7	551.4	551.1	550.8
167.5°	559.0	559.0	558.9	559.0	559.4	559.8	560.2	560.6	560.2	559.8	559.4
170°	563.9	563.9	563.9	564.1	564.5	564.9	565.3	565.7	565.3	564.9	564.5
172.5°	567.9	567.9	567.9	568.1	568.5	568.9	569.3	569.7	569.3	568.9	568.5
175°	572.0	572.0	572.0	572.3	572.7	573.1	573.5	573.9	573.5	573.1	572.7
177.5°	574.1	574.1	574.1	574.3	574.6	575.0	575.3	575.6	575.3	575.0	574.6
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	615.8	614.1	611.6	608.0	605.1	600.5	600.5	601.2	601.2	600.9	600.5
5°	597.1	592.6	587.1	580.7	574.0	567.4	566.2	563.7	561.9	560.7	559.2
7.5°	577.3	569.3	561.3	552.5	544.3	537.6	532.9	529.0	526.5	523.9	521.9
10°	564.0	554.0	544.6	535.2	524.9	516.7	511.5	507.9	505.2	502.7	501.5
12.5°	548.3	536.8	526.4	517.5	506.2	497.7	492.8	491.2	487.9	482.8	480.1
15°	525.2	514.6	502.2	488.5	483.0	472.7	466.9	464.2	462.4	458.4	457.2
17.5°	505.5	491.5	477.6	467.4	457.2	448.9	445.7	442.3	439.9	436.7	435.7
20°	489.7	477.3	464.5	453.6	443.0	433.9	431.1	428.7	426.3	424.8	423.6
22.5°	473.6	461.2	450.7	440.5	429.1	423.2	420.2	417.6	415.8	414.8	413.6
25°	451.1	440.2	428.4	419.3	410.2	406.2	404.4	402.9	401.7	400.2	399.9
27.5°	431.0	419.1	409.6	401.0	394.5	391.2	389.4	388.7	389.0	389.5	389.8
30°	416.0	405.0	397.1	389.8	383.8	380.8	380.5	380.5	381.7	382.0	382.6
32.5°	402.1	393.2	385.2	378.2	373.6	371.5	372.7	372.7	373.7	374.5	375.6
35°	382.0	374.1	368.0	361.9	358.0	358.9	359.5	360.1	361.6	363.5	364.7
37.5°	362.7	355.9	349.6	344.8	343.0	344.7	346.1	347.4	349.2	350.5	351.7
40°	348.9	343.7	337.7	333.4	334.1	334.9	336.2	337.7	339.2	340.1	341.4
42.5°	336.0	330.7	326.1	322.5	323.4	324.6	325.3	326.1	327.8	329.5	330.2
45°	316.5	312.2	307.9	305.9	306.4	307.0	307.7	308.6	310.1	311.3	311.6
47.5°	294.5	291.4	288.6	286.5	287.5	287.2	288.0	290.0	290.5	291.2	292.9
50°	280.4	277.6	274.3	273.7	273.7	273.7	273.9	276.4	276.4	277.6	278.8
52.5°	264.8	263.1	260.9	259.8	259.4	259.4	260.6	261.8	262.3	264.0	265.2
55°	241.8	240.0	238.2	237.3	236.6	237.3	239.7	240.3	241.8	242.7	243.6
57.5°	217.9	216.4	215.0	214.5	214.4	215.2	216.5	218.3	218.7	221.5	222.8
60°	202.1	199.9	198.8	198.8	198.1	200.8	200.3	203.3	203.9	205.7	207.9
62.5°	185.8	182.9	182.4	182.4	183.3	184.1	185.0	186.3	187.9	190.2	191.8
65°	159.6	158.0	160.2	159.9	159.3	161.1	161.1	162.6	164.5	166.6	169.9
67.5°	134.8	134.0	134.2	134.2	135.1	136.1	137.0	138.3	140.5	142.8	144.9
70°	118.0	118.9	117.4	118.7	119.5	119.9	120.4	122.2	124.7	126.2	128.7
72.5°	101.8	101.7	101.9	102.3	103.3	103.9	104.4	106.5	109.2	110.4	112.4
75°	78.3	78.0	78.9	78.9	80.4	81.0	81.6	82.5	84.9	86.7	88.3
77.5°	57.2	57.5	57.4	58.4	58.0	58.1	60.0	60.8	61.1	64.7	65.5
80°	43.1	43.7	44.0	44.3	44.6	44.0	46.1	47.1	47.1	49.1	50.7
82.5°	31.0	31.3	32.1	32.4	32.5	33.0	33.3	33.9	34.6	35.6	37.5
85°	15.4	16.4	16.7	16.4	16.7	16.1	17.0	17.3	17.6	17.6	17.6
87.5°	5.8	6.3	6.3	6.7	6.7	7.3	7.4	7.0	7.1	7.8	6.9
90°	4.4	5.6	6.9	8.2	9.5	10.9	11.2	11.6	12.0	12.4	12.8
92.5°	13.7	14.4	15.1	15.8	16.6	17.3	17.7	18.0	18.3	18.6	18.8
95°	29.5	30.3	31.1	31.8	32.6	33.4	33.8	34.2	34.6	35.0	35.3
97.5°	49.4	50.0	50.5	51.2	51.7	52.4	52.8	53.2	53.7	54.2	54.3
100°	63.8	64.4	64.9	65.4	65.9	66.4	66.7	67.0	67.3	67.7	67.9
102.5°	79.1	79.7	80.3	81.0	81.7	82.3	82.6	82.9	83.3	83.5	83.7
105°	102.5	103.0	103.9	104.8	105.8	106.6	106.6	106.6	106.6	106.6	106.7
107.5°	130.0	130.2	130.6	130.9	131.3	131.7	132.0	132.3	132.6	132.9	133.1
110°	147.7	147.8	148.1	148.3	148.5	148.7	149.1	149.5	149.9	150.3	150.4



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	165.4	165.5	165.6	165.6	165.6	165.6	166.1	166.6	167.1	167.5	167.8
115°	193.2	193.3	193.1	192.9	192.7	192.5	192.6	192.7	192.8	192.9	192.9
117.5°	220.1	220.1	219.8	219.6	219.4	219.0	219.0	219.0	219.0	219.0	218.8
120°	238.8	238.8	238.3	237.8	237.3	236.8	236.7	236.5	236.5	236.4	236.2
122.5°	255.8	255.9	255.6	255.4	255.1	254.8	254.6	254.3	254.1	253.8	253.5
125°	282.3	282.3	282.1	281.9	281.7	281.5	281.1	280.7	280.3	279.9	279.5
127.5°	308.6	308.8	308.6	308.3	308.1	307.9	307.4	306.7	306.2	305.6	305.1
130°	325.8	326.1	325.8	325.5	325.2	324.9	324.5	324.1	323.7	323.3	322.7
132.5°	342.5	342.8	342.5	342.3	342.1	341.9	341.4	340.9	340.4	339.9	339.5
135°	367.0	367.3	367.2	367.1	367.0	366.9	366.5	366.1	365.7	365.3	365.0
137.5°	390.1	390.5	390.8	391.0	391.3	391.6	391.2	390.7	390.3	389.9	389.5
140°	406.4	406.7	406.8	406.9	407.0	407.1	407.0	406.9	406.8	406.7	406.3
142.5°	421.2	421.6	421.8	421.9	422.2	422.3	422.2	422.1	422.0	421.9	421.6
145°	443.1	443.4	443.7	444.0	444.3	444.7	444.5	444.4	444.3	444.3	443.9
147.5°	464.1	464.4	464.7	464.9	465.2	465.5	465.5	465.5	465.5	465.5	465.2
150°	477.5	477.7	477.9	478.1	478.3	478.5	478.5	478.5	478.5	478.5	478.2
152.5°	489.4	489.6	489.7	489.8	490.0	490.0	490.2	490.4	490.6	490.8	490.5
155°	506.5	506.6	506.7	506.8	506.9	507.0	507.4	507.8	508.2	508.6	508.4
157.5°	521.6	521.6	521.7	521.7	521.8	521.9	522.3	522.8	523.2	523.6	523.5
160°	531.0	530.9	530.9	530.9	530.9	530.9	531.4	532.0	532.4	532.9	533.0
162.5°	539.4	539.3	539.4	539.5	539.6	539.6	540.1	540.6	541.1	541.6	541.5
165°	550.5	550.3	550.3	550.3	550.3	550.3	551.0	551.6	552.2	552.8	552.7
167.5°	559.0	558.9	559.0	559.0	559.1	559.2	559.8	560.5	561.1	561.7	561.7
170°	564.1	563.9	563.9	563.9	563.9	563.9	564.6	565.3	566.0	566.7	566.7
172.5°	568.1	567.9	567.9	567.9	567.9	567.9	568.5	569.1	569.7	570.4	570.4
175°	572.3	572.0	572.0	572.0	572.0	572.0	572.7	573.2	573.9	574.5	574.4
177.5°	574.3	574.1	574.1	574.1	574.1	574.1	574.6	575.1	575.6	576.1	576.0
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	598.8	598.6	600.2	599.0	600.2	598.6	598.8	600.5	600.9	601.2	601.2
5°	557.4	558.3	555.2	555.2	555.2	558.3	557.4	559.2	560.7	561.9	563.7
7.5°	520.5	519.1	519.3	517.6	519.3	519.1	520.5	521.9	523.9	526.5	529.0
10°	497.9	496.1	495.4	495.7	495.4	496.1	497.9	501.5	502.7	505.2	507.9
12.5°	479.2	478.8	474.8	474.9	474.8	478.8	479.2	480.1	482.8	487.9	491.2
15°	457.2	451.5	450.8	452.7	450.8	451.5	457.2	457.2	458.4	462.4	464.2
17.5°	435.2	432.1	432.4	431.4	432.4	432.1	435.2	435.7	436.7	439.9	442.3
20°	423.6	421.8	421.4	419.3	421.4	421.8	423.6	423.6	424.8	426.3	428.7
22.5°	412.9	412.3	412.4	410.1	412.4	412.3	412.9	413.6	414.8	415.8	417.6
25°	399.6	401.1	399.9	399.9	399.9	401.1	399.6	399.9	400.2	401.7	402.9
27.5°	390.6	390.5	389.9	389.9	389.9	390.5	390.6	389.8	389.5	389.0	388.7
30°	383.8	383.5	384.1	384.1	384.1	383.5	383.8	382.6	382.0	381.7	380.5
32.5°	377.0	377.4	377.6	377.8	377.6	377.4	377.0	375.6	374.5	373.7	372.7
35°	366.5	366.8	367.7	367.1	367.7	366.8	366.5	364.7	363.5	361.6	360.1
37.5°	352.3	353.7	353.4	353.9	353.4	353.7	352.3	351.7	350.5	349.2	347.4
40°	341.7	342.5	342.2	342.2	342.2	342.5	341.7	341.4	340.1	339.2	337.7
42.5°	330.7	331.4	330.6	330.1	330.6	331.4	330.7	330.2	329.5	327.8	326.1
45°	312.8	312.2	313.1	311.9	313.1	312.2	312.8	311.6	311.3	310.1	308.6
47.5°	292.8	293.4	293.7	294.5	293.7	293.4	292.8	292.9	291.2	290.5	290.0
50°	279.4	281.2	281.2	281.0	281.2	281.2	279.4	278.8	277.6	276.4	276.4
52.5°	266.3	267.2	268.4	268.3	268.4	267.2	266.3	265.2	264.0	262.3	261.8
55°	246.1	246.7	247.2	247.6	247.2	246.7	246.1	243.6	242.7	241.8	240.3
57.5°	225.1	224.8	226.2	226.7	226.2	224.8	225.1	222.8	221.5	218.7	218.3
60°	210.2	210.2	212.7	213.6	212.7	210.2	210.2	207.9	205.7	203.9	203.3
62.5°	194.5	195.4	197.9	196.6	197.9	195.4	194.5	191.8	190.2	187.9	186.3
65°	171.4	173.9	173.6	174.8	173.6	173.9	171.4	169.9	166.6	164.5	162.6
67.5°	147.3	148.9	151.1	151.2	151.1	148.9	147.3	144.9	142.8	140.5	138.3
70°	131.1	132.6	133.8	134.7	133.8	132.6	131.1	128.7	126.2	124.7	122.2
72.5°	115.3	116.1	119.0	117.7	119.0	116.1	115.3	112.4	110.4	109.2	106.5
75°	90.4	92.5	94.3	93.5	94.3	92.5	90.4	88.3	86.7	84.9	82.5
77.5°	66.9	69.0	69.9	69.1	69.9	69.0	66.9	65.5	64.7	61.1	60.8
80°	52.8	52.5	54.3	54.0	54.3	52.5	52.8	50.7	49.1	47.1	47.1
82.5°	38.7	38.4	39.3	39.5	39.3	38.4	38.7	37.5	35.6	34.6	33.9
85°	18.8	19.7	18.5	18.2	18.5	19.7	18.8	17.6	17.6	17.6	17.3
87.5°	7.0	7.0	6.8	6.6	6.8	7.0	7.0	6.9	7.8	7.1	7.0
90°	13.0	13.2	13.4	13.5	13.4	13.2	13.0	12.8	12.4	12.0	11.6
92.5°	18.6	18.5	18.4	18.2	18.4	18.5	18.6	18.8	18.6	18.3	18.0
95°	35.3	35.3	35.3	35.3	35.3	35.3	35.3	35.3	35.0	34.6	34.2
97.5°	54.3	54.3	54.3	54.2	54.3	54.3	54.3	54.3	54.2	53.7	53.2
100°	68.0	68.3	68.4	68.7	68.4	68.3	68.0	67.9	67.7	67.3	67.0
102.5°	83.7	83.6	83.6	83.5	83.6	83.6	83.7	83.7	83.5	83.3	82.9
105°	106.9	107.1	107.3	107.6	107.3	107.1	106.9	106.7	106.6	106.6	106.6
107.5°	132.9	132.8	132.7	132.6	132.7	132.8	132.9	133.1	132.9	132.6	132.3
110°	150.2	150.0	149.8	149.6	149.8	150.0	150.2	150.4	150.3	149.9	149.5



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	167.8	167.7	167.7	167.6	167.7	167.7	167.8	167.8	167.5	167.1	166.6
115°	192.8	192.7	192.6	192.5	192.6	192.7	192.8	192.9	192.9	192.8	192.7
117.5°	218.6	218.2	218.0	217.7	218.0	218.2	218.6	218.8	219.0	219.0	219.0
120°	236.0	235.8	235.6	235.4	235.6	235.8	236.0	236.2	236.4	236.5	236.5
122.5°	253.3	252.9	252.7	252.4	252.7	252.9	253.3	253.5	253.8	254.1	254.3
125°	279.1	278.7	278.3	277.9	278.3	278.7	279.1	279.5	279.9	280.3	280.7
127.5°	304.7	304.2	303.7	303.2	303.7	304.2	304.7	305.1	305.6	306.2	306.7
130°	322.0	321.3	320.6	319.9	320.6	321.3	322.0	322.7	323.3	323.7	324.1
132.5°	338.9	338.3	337.8	337.2	337.8	338.3	338.9	339.5	339.9	340.4	340.9
135°	364.8	364.6	364.4	364.2	364.4	364.6	364.8	365.0	365.3	365.7	366.1
137.5°	389.1	388.7	388.3	387.9	388.3	388.7	389.1	389.5	389.9	390.3	390.7
140°	405.6	404.9	404.2	403.5	404.2	404.9	405.6	406.3	406.7	406.8	406.9
142.5°	421.0	420.5	419.9	419.4	419.9	420.5	421.0	421.6	421.9	422.0	422.1
145°	443.5	443.1	442.8	442.4	442.8	443.1	443.5	443.9	444.3	444.3	444.4
147.5°	464.6	464.0	463.4	462.8	463.4	464.0	464.6	465.2	465.5	465.5	465.5
150°	477.6	477.0	476.4	475.8	476.4	477.0	477.6	478.2	478.5	478.5	478.5
152.5°	490.0	489.5	489.0	488.5	489.0	489.5	490.0	490.5	490.8	490.6	490.4
155°	507.7	507.0	506.4	505.6	506.4	507.0	507.7	508.4	508.6	508.2	507.8
157.5°	522.9	522.4	521.8	521.3	521.8	522.4	522.9	523.5	523.6	523.2	522.8
160°	532.6	532.2	531.8	531.4	531.8	532.2	532.6	533.0	532.9	532.4	532.0
162.5°	540.9	540.3	539.6	539.0	539.6	540.3	540.9	541.5	541.6	541.1	540.6
165°	552.0	551.3	550.6	549.9	550.6	551.3	552.0	552.7	552.8	552.2	551.6
167.5°	561.1	560.5	559.8	559.2	559.8	560.5	561.1	561.7	561.7	561.1	560.5
170°	566.0	565.3	564.6	563.9	564.6	565.3	566.0	566.7	566.7	566.0	565.3
172.5°	569.7	568.9	568.2	567.5	568.2	568.9	569.7	570.4	570.4	569.7	569.1
175°	573.7	573.0	572.3	571.6	572.3	573.0	573.7	574.4	574.5	573.9	573.2
177.5°	575.4	574.9	574.3	573.8	574.3	574.9	575.4	576.0	576.1	575.6	575.1
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	600.5	600.5	605.1	608.0	611.6	614.1	615.8	617.5	620.4	624.3	628.7
5°	566.2	567.4	574.0	580.7	587.1	592.6	597.1	602.5	609.3	617.4	626.5
7.5°	532.9	537.6	544.3	552.5	561.3	569.3	577.3	586.4	595.7	607.8	620.6
10°	511.5	516.7	524.9	535.2	544.6	554.0	564.0	573.7	585.6	599.8	616.2
12.5°	492.8	497.7	506.2	517.5	526.4	536.8	548.3	560.9	574.2	591.4	609.9
15°	466.9	472.7	483.0	488.5	502.2	514.6	525.2	543.4	560.4	578.0	599.5
17.5°	445.7	448.9	457.2	467.4	477.6	491.5	505.5	520.6	537.6	559.1	586.1
20°	431.1	433.9	443.0	453.6	464.5	477.3	489.7	504.9	523.9	546.8	575.8
22.5°	420.2	423.2	429.1	440.5	450.7	461.2	473.6	491.8	512.1	534.3	565.9
25°	404.4	406.2	410.2	419.3	428.4	440.2	451.1	468.2	489.1	515.2	546.8
27.5°	389.4	391.2	394.5	401.0	409.6	419.1	431.0	445.4	466.7	495.0	528.5
30°	380.5	380.8	383.8	389.8	397.1	405.0	416.0	432.4	452.3	481.2	516.4
32.5°	372.7	371.5	373.6	378.2	385.2	393.2	402.1	418.3	437.6	465.9	502.1
35°	359.5	358.9	358.0	361.9	368.0	374.1	382.0	394.1	416.0	442.4	480.3
37.5°	346.1	344.7	343.0	344.8	349.6	355.9	362.7	373.5	392.4	421.4	457.7
40°	336.2	334.9	334.1	333.4	337.7	343.7	348.9	359.3	376.8	404.4	440.2
42.5°	325.3	324.6	323.4	322.5	326.1	330.7	336.0	345.2	362.7	388.6	422.6
45°	307.7	307.0	306.4	305.9	307.9	312.2	316.5	323.1	338.3	363.5	394.1
47.5°	288.0	287.2	287.5	286.5	288.6	291.4	294.5	301.6	316.2	336.4	358.9
50°	273.9	273.7	273.7	273.7	274.3	277.6	280.4	285.8	299.1	319.5	335.6
52.5°	260.6	259.4	259.4	259.8	260.9	263.1	264.8	270.8	282.4	299.1	313.7
55°	239.7	237.3	236.6	237.3	238.2	240.0	241.8	246.7	256.7	269.1	277.6
57.5°	216.5	215.2	214.4	214.5	215.0	216.4	217.9	223.2	231.0	237.5	243.0
60°	200.3	200.8	198.1	198.8	198.8	199.9	202.1	205.4	212.1	216.7	222.1
62.5°	185.0	184.1	183.3	182.4	182.4	182.9	185.8	188.4	194.1	196.5	200.7
65°	161.1	161.1	159.3	159.9	160.2	158.0	159.6	162.6	166.3	167.2	171.1
67.5°	137.0	136.1	135.1	134.2	134.2	134.0	134.8	136.3	139.0	139.3	142.4
70°	120.4	119.9	119.5	118.7	117.4	118.9	118.0	119.5	121.0	121.4	123.2
72.5°	104.4	103.9	103.3	102.3	101.9	101.7	101.8	103.5	104.6	104.1	106.2
75°	81.6	81.0	80.4	78.9	78.9	78.0	78.3	79.5	80.7	79.8	81.6
77.5°	60.0	58.1	58.0	58.4	57.4	57.5	57.2	57.0	57.5	57.6	59.3
80°	46.1	44.0	44.6	44.3	44.0	43.7	43.1	43.4	43.7	44.0	44.9
82.5°	33.3	33.0	32.5	32.4	32.1	31.3	31.0	31.5	31.8	31.6	32.3
85°	17.0	16.1	16.7	16.4	16.7	16.4	15.4	15.4	16.1	15.8	16.4
87.5°	7.4	7.3	6.7	6.7	6.3	6.3	5.8	5.8	5.9	5.6	5.9
90°	11.2	10.9	9.5	8.2	6.9	5.6	4.4	3.5	2.5	1.4	0.5
92.5°	17.7	17.3	16.6	15.8	15.1	14.4	13.7	13.0	12.3	11.6	10.9
95°	33.8	33.4	32.6	31.8	31.1	30.3	29.5	28.8	28.0	27.3	26.7
97.5°	52.8	52.4	51.7	51.2	50.5	50.0	49.4	49.0	48.4	47.8	47.4
100°	66.7	66.4	65.9	65.4	64.9	64.4	63.8	63.3	62.7	62.0	61.5
102.5°	82.6	82.3	81.7	81.0	80.3	79.7	79.1	78.8	78.4	78.1	77.7
105°	106.6	106.6	105.8	104.8	103.9	103.0	102.5	102.3	102.0	101.9	101.6
107.5°	132.0	131.7	131.3	130.9	130.6	130.2	130.0	129.8	129.8	129.6	129.5
110°	149.1	148.7	148.5	148.3	148.1	147.8	147.7	147.4	147.3	147.0	146.9



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	166.1	165.6	165.6	165.6	165.6	165.5	165.4	165.2	165.2	165.0	164.9
115°	192.6	192.5	192.7	192.9	193.1	193.3	193.2	193.0	192.7	192.3	192.0
117.5°	219.0	219.0	219.4	219.6	219.8	220.1	220.1	219.9	219.8	219.5	219.4
120°	236.7	236.8	237.3	237.8	238.3	238.8	238.8	238.1	237.5	236.9	236.3
122.5°	254.6	254.8	255.1	255.4	255.6	255.9	255.8	255.3	254.9	254.4	254.1
125°	281.1	281.5	281.7	281.9	282.1	282.3	282.3	281.9	281.6	281.4	281.1
127.5°	307.4	307.9	308.1	308.3	308.6	308.8	308.6	307.9	307.3	306.7	306.0
130°	324.5	324.9	325.2	325.5	325.8	326.1	325.8	325.0	324.2	323.4	322.7
132.5°	341.4	341.9	342.1	342.3	342.5	342.8	342.5	341.7	340.9	340.1	339.2
135°	366.5	366.9	367.0	367.1	367.2	367.3	367.0	366.5	365.8	365.3	364.6
137.5°	391.2	391.6	391.3	391.0	390.8	390.5	390.1	389.7	389.1	388.6	388.2
140°	407.0	407.1	407.0	406.9	406.8	406.7	406.4	405.9	405.4	404.9	404.4
142.5°	422.2	422.3	422.2	421.9	421.8	421.6	421.2	420.7	420.3	419.7	419.2
145°	444.5	444.7	444.3	444.0	443.7	443.4	443.1	443.0	442.8	442.6	442.4
147.5°	465.5	465.5	465.2	464.9	464.7	464.4	464.1	463.7	463.3	463.0	462.6
150°	478.5	478.5	478.3	478.1	477.9	477.7	477.5	477.3	477.1	476.9	476.7
152.5°	490.2	490.0	490.0	489.8	489.7	489.6	489.4	489.1	488.9	488.5	488.3
155°	507.4	507.0	506.9	506.8	506.7	506.6	506.5	506.5	506.5	506.5	506.5
157.5°	522.3	521.9	521.8	521.7	521.7	521.6	521.6	521.7	521.8	522.0	522.0
160°	531.4	530.9	530.9	530.9	530.9	530.9	531.0	531.2	531.4	531.6	531.8
162.5°	540.1	539.6	539.6	539.5	539.4	539.3	539.4	539.6	540.0	540.2	540.5
165°	551.0	550.3	550.3	550.3	550.3	550.3	550.5	550.8	551.1	551.4	551.7
167.5°	559.8	559.2	559.1	559.0	559.0	558.9	559.0	559.4	559.8	560.2	560.6
170°	564.6	563.9	563.9	563.9	563.9	563.9	564.1	564.5	564.9	565.3	565.7
172.5°	568.5	567.9	567.9	567.9	567.9	567.9	568.1	568.5	568.9	569.3	569.7
175°	572.7	572.0	572.0	572.0	572.0	572.0	572.3	572.7	573.1	573.5	573.9
177.5°	574.6	574.1	574.1	574.1	574.1	574.1	574.3	574.6	575.0	575.3	575.6
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	630.1	631.3	635.4	638.3	641.7	643.7	645.6	647.1	649.0	649.5	656.6
5°	632.9	639.0	649.6	657.4	667.2	677.8	685.1	688.4	697.2	704.5	719.1
7.5°	632.1	645.0	661.1	677.7	695.5	712.0	726.4	743.3	755.4	773.6	791.5
10°	631.4	648.6	669.3	690.5	715.4	738.5	759.1	782.2	801.3	826.5	848.0
12.5°	629.2	650.1	678.7	703.9	734.1	765.9	796.5	826.1	843.0	884.9	904.8
15°	623.8	648.6	684.4	722.7	764.3	801.9	840.7	871.6	921.7	958.5	981.8
17.5°	613.5	648.3	690.8	736.9	787.4	837.0	881.0	928.0	981.1	1025.5	1072.9
20°	608.6	646.8	694.2	745.1	797.6	853.7	903.8	960.3	1018.2	1061.9	1122.6
22.5°	599.7	642.9	694.0	750.8	806.8	864.9	923.5	980.4	1047.3	1107.6	1165.3
25°	584.9	633.5	686.3	749.7	815.6	873.8	943.9	1019.5	1089.3	1166.6	1224.2
27.5°	569.6	621.4	674.3	733.2	804.1	873.2	961.4	1046.7	1132.0	1198.9	1241.5
30°	557.6	608.0	662.7	722.1	792.2	874.4	973.0	1066.1	1149.3	1206.7	1230.6
32.5°	544.8	595.9	644.2	706.5	781.3	873.7	980.3	1077.5	1150.2	1188.4	1183.8
35°	524.6	567.4	614.4	674.5	762.5	868.3	984.5	1078.6	1123.2	1115.0	1053.1
37.5°	495.4	531.5	577.7	643.5	740.6	857.1	976.0	1046.6	1043.7	977.0	887.3
40°	477.3	507.9	552.5	621.7	723.6	849.9	962.7	1008.5	969.7	876.5	769.1
42.5°	453.4	481.6	526.2	597.4	705.0	835.0	937.2	950.5	874.5	767.3	668.9
45°	416.6	441.5	487.6	561.0	676.9	802.8	875.0	842.6	740.3	629.5	554.6
47.5°	376.9	402.8	447.2	522.6	636.4	754.3	788.7	719.7	614.7	524.9	456.1
50°	352.0	376.8	420.2	496.4	609.0	714.5	728.8	639.6	543.1	464.2	407.7
52.5°	326.7	350.1	392.8	469.2	576.9	668.4	659.6	568.7	480.0	412.7	368.4
55°	289.1	311.3	352.0	423.6	521.6	594.1	562.2	475.5	402.0	349.8	316.2
57.5°	255.6	276.8	311.8	376.5	461.7	511.5	471.0	397.9	339.5	299.4	274.3
60°	232.7	251.5	284.9	345.0	419.0	456.9	416.8	352.3	303.1	270.9	248.5
62.5°	211.1	227.5	258.4	312.9	377.2	409.1	368.6	313.9	272.0	243.5	224.4
65°	178.4	193.3	220.5	263.1	315.8	337.1	302.2	257.9	225.5	204.2	191.5
67.5°	148.5	161.1	184.7	218.2	257.1	272.5	246.0	211.7	187.2	170.2	160.0
70°	128.7	139.6	158.0	186.9	222.1	233.9	209.1	180.9	163.0	149.2	139.9
72.5°	111.9	119.9	136.7	159.0	188.4	197.7	180.4	155.6	138.9	128.7	121.2
75°	85.2	91.9	102.8	120.7	141.1	146.6	133.5	118.0	106.8	99.5	93.7
77.5°	61.5	66.4	74.3	85.3	99.4	104.3	96.1	85.7	77.6	72.6	69.4
80°	46.4	50.4	57.0	66.1	74.6	77.4	72.5	64.6	58.9	56.2	53.4
82.5°	34.3	36.5	40.6	46.7	52.5	55.8	51.7	46.9	43.8	41.4	40.3
85°	17.3	18.5	20.4	22.7	26.4	27.6	26.1	24.9	23.1	21.5	21.5
87.5°	6.6	6.8	7.8	8.4	9.6	10.6	10.6	10.4	10.5	10.3	10.1
90°	1.4	2.5	3.5	4.4	5.6	6.9	8.2	9.5	10.9	11.2	11.6
92.5°	11.6	12.3	13.0	13.7	14.4	15.1	15.8	16.6	17.3	17.7	18.0
95°	27.3	28.0	28.8	29.5	30.3	31.1	31.8	32.6	33.4	33.8	34.2
97.5°	47.8	48.4	49.0	49.4	50.0	50.5	51.2	51.7	52.4	52.8	53.2
100°	62.0	62.7	63.3	63.8	64.4	64.9	65.4	65.9	66.4	66.7	67.0
102.5°	78.1	78.4	78.8	79.1	79.7	80.3	81.0	81.7	82.3	82.6	82.9
105°	101.9	102.0	102.3	102.5	103.0	103.9	104.8	105.8	106.6	106.6	106.6
107.5°	129.6	129.8	129.8	130.0	130.2	130.6	130.9	131.3	131.7	132.0	132.3
110°	147.0	147.3	147.4	147.7	147.8	148.1	148.3	148.5	148.7	149.1	149.5



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	165.0	165.2	165.2	165.4	165.5	165.6	165.6	165.6	165.6	166.1	166.6
115°	192.3	192.7	193.0	193.2	193.3	193.1	192.9	192.7	192.5	192.6	192.7
117.5°	219.5	219.8	219.9	220.1	220.1	219.8	219.6	219.4	219.0	219.0	219.0
120°	236.9	237.5	238.1	238.8	238.8	238.3	237.8	237.3	236.8	236.7	236.5
122.5°	254.4	254.9	255.3	255.8	255.9	255.6	255.4	255.1	254.8	254.6	254.3
125°	281.4	281.6	281.9	282.3	282.3	282.1	281.9	281.7	281.5	281.1	280.7
127.5°	306.7	307.3	307.9	308.6	308.8	308.6	308.3	308.1	307.9	307.4	306.7
130°	323.4	324.2	325.0	325.8	326.1	325.8	325.5	325.2	324.9	324.5	324.1
132.5°	340.1	340.9	341.7	342.5	342.8	342.5	342.3	342.1	341.9	341.4	340.9
135°	365.3	365.8	366.5	367.0	367.3	367.2	367.1	367.0	366.9	366.5	366.1
137.5°	388.6	389.1	389.7	390.1	390.5	390.8	391.0	391.3	391.6	391.2	390.7
140°	404.9	405.4	405.9	406.4	406.7	406.8	406.9	407.0	407.1	407.0	406.9
142.5°	419.7	420.3	420.7	421.2	421.6	421.8	421.9	422.2	422.3	422.2	422.1
145°	442.6	442.8	443.0	443.1	443.4	443.7	444.0	444.3	444.7	444.5	444.4
147.5°	463.0	463.3	463.7	464.1	464.4	464.7	464.9	465.2	465.5	465.5	465.5
150°	476.9	477.1	477.3	477.5	477.7	477.9	478.1	478.3	478.5	478.5	478.5
152.5°	488.5	488.9	489.1	489.4	489.6	489.7	489.8	490.0	490.0	490.2	490.4
155°	506.5	506.5	506.5	506.5	506.6	506.7	506.8	506.9	507.0	507.4	507.8
157.5°	522.0	521.8	521.7	521.6	521.6	521.7	521.7	521.8	521.9	522.3	522.8
160°	531.6	531.4	531.2	531.0	530.9	530.9	530.9	530.9	530.9	531.4	532.0
162.5°	540.2	540.0	539.6	539.4	539.3	539.4	539.5	539.6	539.6	540.1	540.6
165°	551.4	551.1	550.8	550.5	550.3	550.3	550.3	550.3	550.3	551.0	551.6
167.5°	560.2	559.8	559.4	559.0	558.9	559.0	559.0	559.1	559.2	559.8	560.5
170°	565.3	564.9	564.5	564.1	563.9	563.9	563.9	563.9	563.9	564.6	565.3
172.5°	569.3	568.9	568.5	568.1	567.9	567.9	567.9	567.9	567.9	568.5	569.1
175°	573.5	573.1	572.7	572.3	572.0	572.0	572.0	572.0	572.0	572.7	573.2
177.5°	575.3	575.0	574.6	574.3	574.1	574.1	574.1	574.1	574.1	574.6	575.1
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	626.2	626.2	626.2	626.2	626.2	626.2	626.2
2.5°	659.0	659.3	661.9	663.8	662.9	664.1	664.6
5°	719.9	730.9	736.7	740.9	741.2	741.5	743.9
7.5°	806.4	818.2	826.7	839.7	843.6	848.0	846.8
10°	869.6	886.8	901.7	909.6	918.1	930.5	920.5
12.5°	928.5	959.2	981.8	994.0	1002.1	1004.6	999.7
15°	1025.8	1065.9	1087.4	1086.8	1114.1	1125.9	1107.4
17.5°	1115.0	1152.0	1181.5	1196.7	1219.5	1224.6	1222.3
20°	1169.6	1210.0	1233.0	1259.1	1271.0	1281.6	1283.4
22.5°	1216.7	1252.9	1277.7	1299.4	1309.3	1314.3	1317.4
25°	1265.2	1293.7	1308.6	1316.1	1318.9	1318.3	1314.3
27.5°	1261.9	1264.0	1247.7	1231.6	1217.2	1200.9	1195.4
30°	1229.1	1203.6	1158.1	1132.3	1094.4	1064.3	1076.5
32.5°	1142.9	1092.2	1041.1	984.7	938.0	924.8	911.4
35°	975.4	886.2	834.1	773.4	749.1	724.8	708.1
37.5°	789.2	720.2	658.2	618.5	594.2	578.9	570.6
40°	682.4	620.1	569.2	537.0	518.5	501.2	498.8
42.5°	597.1	539.3	501.0	475.4	457.6	450.3	444.9
45°	489.1	448.7	422.9	404.7	392.9	388.3	382.3
47.5°	414.0	385.5	366.1	353.7	344.8	341.4	340.9
50°	372.0	348.3	334.1	324.3	317.3	316.2	311.3
52.5°	340.4	319.9	308.8	300.3	295.2	291.8	290.4
55°	295.5	281.9	271.9	267.0	263.1	259.7	259.7
57.5°	258.6	247.2	240.5	236.4	235.2	232.8	231.3
60°	235.8	226.0	220.9	217.2	214.8	215.1	212.4
62.5°	213.4	207.1	202.2	198.5	195.7	195.7	195.9
65°	181.7	176.9	173.3	172.1	170.2	168.1	168.7
67.5°	154.0	149.5	146.6	144.6	143.9	142.8	144.6
70°	134.1	130.8	128.7	126.8	126.2	126.5	128.0
72.5°	115.9	113.5	112.2	111.3	110.0	110.0	111.1
75°	91.0	89.2	88.0	87.1	86.7	86.7	86.7
77.5°	66.9	66.5	65.9	64.6	64.6	65.0	65.0
80°	52.8	51.9	51.6	50.9	50.1	49.4	50.9
82.5°	39.5	38.5	38.3	38.1	36.7	36.6	37.9
85°	21.2	20.4	20.6	20.4	20.4	20.0	20.0
87.5°	9.9	9.7	9.6	9.9	9.7	9.5	10.0
90°	12.0	12.4	12.8	13.0	13.2	13.4	13.5
92.5°	18.3	18.6	18.8	18.6	18.5	18.4	18.2
95°	34.6	35.0	35.3	35.3	35.3	35.3	35.3
97.5°	53.7	54.2	54.3	54.3	54.3	54.3	54.2
100°	67.3	67.7	67.9	68.0	68.3	68.4	68.7
102.5°	83.3	83.5	83.7	83.7	83.6	83.6	83.5
105°	106.6	106.6	106.7	106.9	107.1	107.3	107.6
107.5°	132.6	132.9	133.1	132.9	132.8	132.7	132.6
110°	149.9	150.3	150.4	150.2	150.0	149.8	149.6



TEST NUMBER: P331920-927

CATALOG NUMBER: S123DIP-S560D585U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	167.1	167.5	167.8	167.8	167.7	167.7	167.6
115°	192.8	192.9	192.9	192.8	192.7	192.6	192.5
117.5°	219.0	219.0	218.8	218.6	218.2	218.0	217.7
120°	236.5	236.4	236.2	236.0	235.8	235.6	235.4
122.5°	254.1	253.8	253.5	253.3	252.9	252.7	252.4
125°	280.3	279.9	279.5	279.1	278.7	278.3	277.9
127.5°	306.2	305.6	305.1	304.7	304.2	303.7	303.2
130°	323.7	323.3	322.7	322.0	321.3	320.6	319.9
132.5°	340.4	339.9	339.5	338.9	338.3	337.8	337.2
135°	365.7	365.3	365.0	364.8	364.6	364.4	364.2
137.5°	390.3	389.9	389.5	389.1	388.7	388.3	387.9
140°	406.8	406.7	406.3	405.6	404.9	404.2	403.5
142.5°	422.0	421.9	421.6	421.0	420.5	419.9	419.4
145°	444.3	444.3	443.9	443.5	443.1	442.8	442.4
147.5°	465.5	465.5	465.2	464.6	464.0	463.4	462.8
150°	478.5	478.5	478.2	477.6	477.0	476.4	475.8
152.5°	490.6	490.8	490.5	490.0	489.5	489.0	488.5
155°	508.2	508.6	508.4	507.7	507.0	506.4	505.6
157.5°	523.2	523.6	523.5	522.9	522.4	521.8	521.3
160°	532.4	532.9	533.0	532.6	532.2	531.8	531.4
162.5°	541.1	541.6	541.5	540.9	540.3	539.6	539.0
165°	552.2	552.8	552.7	552.0	551.3	550.6	549.9
167.5°	561.1	561.7	561.7	561.1	560.5	559.8	559.2
170°	566.0	566.7	566.7	566.0	565.3	564.6	563.9
172.5°	569.7	570.4	570.4	569.7	568.9	568.2	567.5
175°	573.9	574.5	574.4	573.7	573.0	572.3	571.6
177.5°	575.6	576.1	576.0	575.4	574.9	574.3	573.8
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2

(END OF REPORT)