

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332336-935

Luminaire Tested: **S123RDIP-S1000D585U935-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332336-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1000D585U935-4F0-1E-UDD-A  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 585 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5425.5 lumens  
Efficiency: N/A  
Efficacy: 111.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 48.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

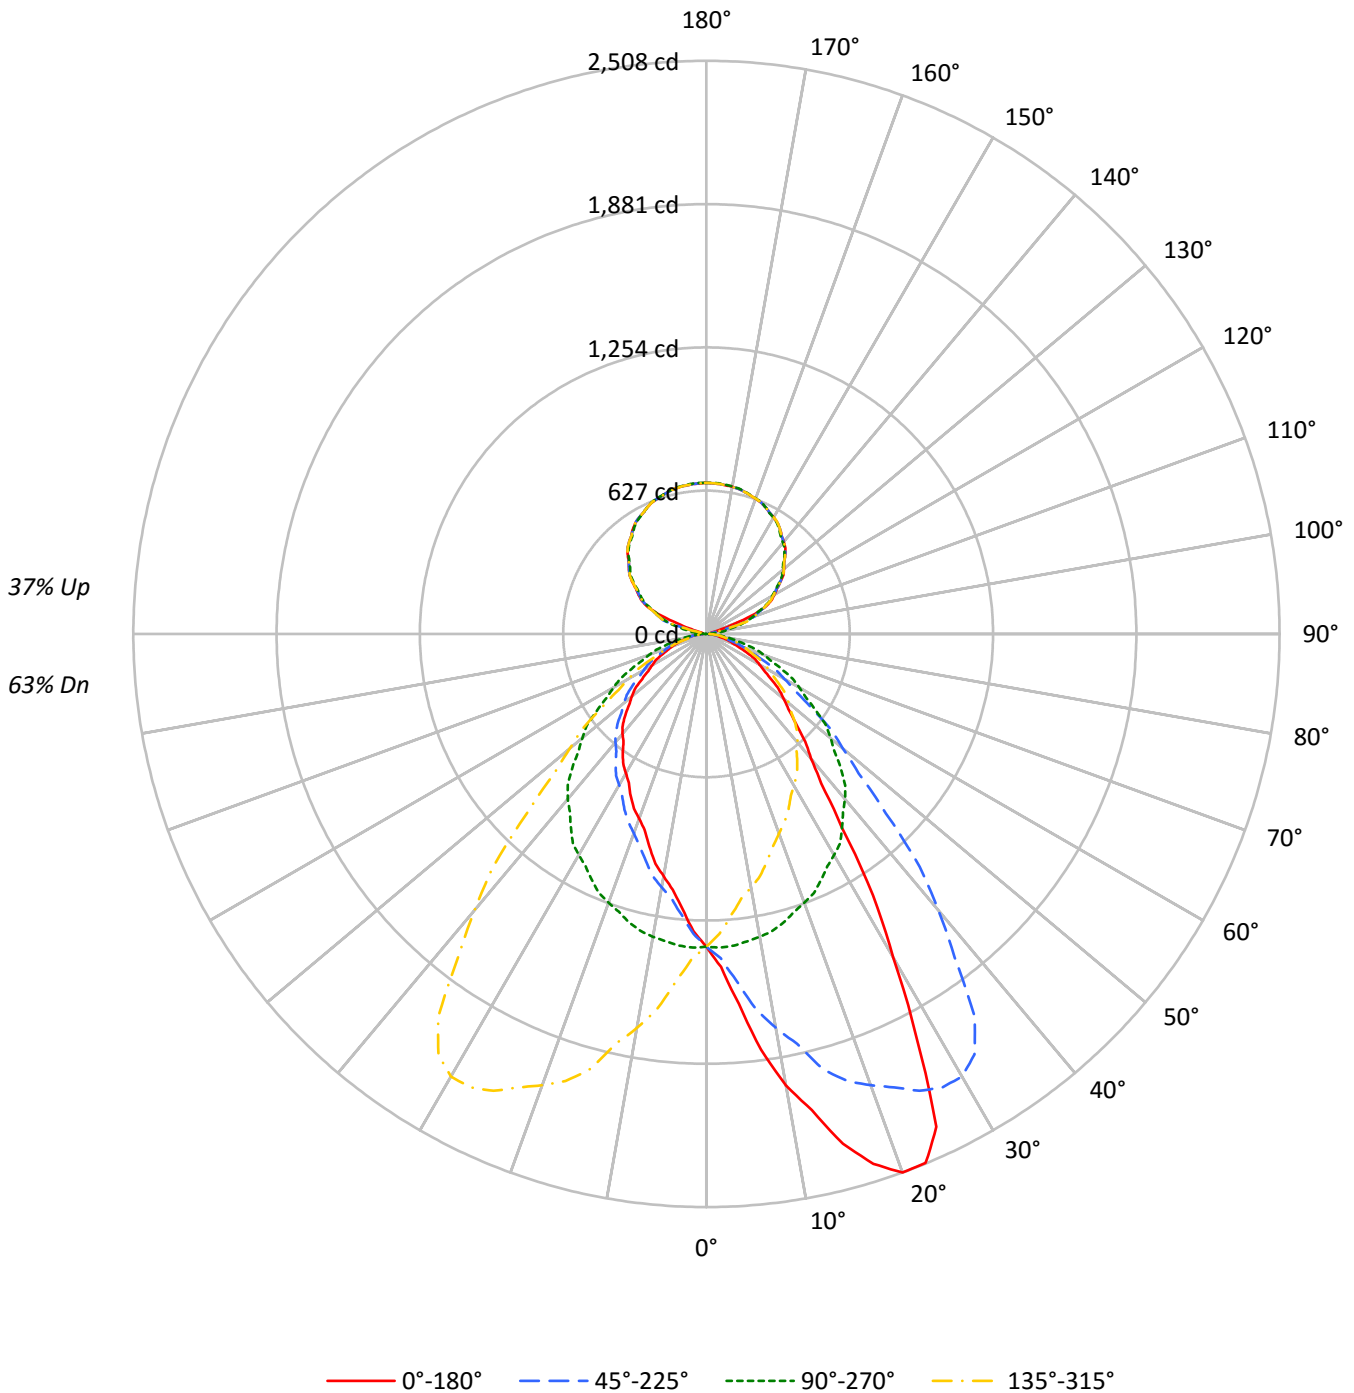



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68	63
1	101	97	94	90	95	91	88	85	81	78	76	70	69	67	61	60	59	54
2	93	86	80	75	87	81	76	71	71	67	64	63	60	57	55	53	51	47
3	85	76	69	63	80	72	66	60	64	59	55	56	52	49	49	46	44	40
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	44	41	39	35
5	72	61	53	47	68	58	51	45	51	46	41	46	41	38	40	37	34	31
6	67	55	47	41	63	52	45	40	47	41	36	42	37	33	37	33	30	28
7	62	50	42	37	58	47	40	35	43	37	32	38	33	30	34	30	27	25
8	58	46	38	33	54	43	36	31	39	33	29	35	30	27	31	27	25	22
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22	20
10	50	38	31	26	47	37	30	26	33	28	24	30	25	22	27	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	14733	14733	14733	14733
5°	17562	14795	13029	14795
10°	21928	14711	11770	14711
15°	25740	14561	10735	14561
20°	28726	14336	9852	14336
25°	28268	14099	9311	14099
30°	20319	13881	8754	13881
35°	13566	13596	8393	13596
40°	9996	13256	8019	13256
45°	8385	12657	7652	12657
50°	7398	11871	7142	11871
55°	6488	10975	6444	10975
60°	5778	10116	5903	10116
65°	5074	9192	5491	9192
70°	3984	8371	5017	8371
75°	3510	7311	4579	7311
80°	3050	6211	4506	6211
85°	2458	5002	4780	5002



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	134.6	2.5
10°-20°	420.5	7.8
20°-30°	660.6	12.2
30°-40°	689.3	12.7
40°-50°	589.9	10.9
50°-60°	449.6	8.3
60°-70°	288.2	5.3
70°-80°	138.6	2.6
80°-90°	38.5	0.7
90°-100°	24.0	0.4
100°-110°	114.5	2.1
110°-120°	275.1	5.1
120°-130°	350.3	6.5
130°-140°	374.3	6.9
140°-150°	350.0	6.5
150°-160°	282.3	5.2
160°-170°	182.2	3.4
170°-180°	62.8	1.2
0°-30°	1215.8	22.4
0°-40°	1905.0	35.1
0°-60°	2944.5	54.3
0°-90°	3409.8	62.8
90°-120°	413.7	7.6
90°-150°	1488.3	27.4
90°-180°	2016.0	37.2
0°-180°	5425.5	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1369	1369	1369	1369	1369	
5°	1625	1369	1206	1369	1625	168
15°	2310	1307	963	1307	2310	655
25°	2380	1187	784	1187	2380	1023
35°	1032	1035	639	1035	1032	677
45°	551	832	503	832	551	433
55°	346	585	343	585	346	313
65°	199	361	216	361	199	196
75°	84	176	110	176	84	90
85°	20	40	39	40	20	23
90°	15	0	15	0	15	7
95°	19	30	19	30	19	16
105°	22	146	22	146	22	49
115°	289	274	289	274	289	267
125°	395	387	395	387	395	353
135°	487	482	487	482	487	375
145°	561	556	561	556	561	350
155°	611	612	611	612	611	282
165°	644	646	644	646	644	182
175°	658	661	658	661	658	63
180°	661	661	661	661	661	



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1457.8	1459.7	1453.6	1452.7	1445.6	1443.7	1443.7	1433.9	1427.8	1419.9	1415.1
5°	1625.4	1634.8	1630.0	1619.5	1602.0	1597.8	1586.7	1569.2	1549.2	1524.6	1512.9
7.5°	1834.7	1847.4	1842.5	1826.3	1807.8	1792.9	1761.6	1732.4	1691.5	1655.6	1625.0
10°	2006.2	1992.8	1982.2	1966.4	1949.4	1921.8	1889.0	1843.9	1791.8	1750.8	1705.1
12.5°	2134.7	2132.4	2119.1	2102.8	2078.8	2052.6	2012.3	1957.4	1896.8	1837.5	1785.2
15°	2309.8	2313.2	2304.5	2287.5	2253.5	2207.3	2146.3	2123.5	2036.7	1972.3	1907.8
17.5°	2430.9	2430.3	2429.1	2405.5	2370.8	2337.9	2281.4	2221.3	2142.8	2051.9	1965.1
20°	2507.8	2502.0	2503.1	2476.8	2451.0	2412.9	2357.8	2270.5	2206.1	2101.2	2011.6
22.5°	2505.9	2504.7	2509.2	2500.2	2481.5	2452.3	2408.9	2335.2	2252.9	2147.1	2046.3
25°	2380.1	2375.4	2403.0	2410.5	2440.4	2445.7	2432.8	2392.4	2314.5	2205.5	2080.7
27.5°	1991.9	1989.3	2040.5	2104.5	2185.6	2248.6	2309.5	2339.0	2314.5	2236.4	2111.3
30°	1634.8	1689.9	1715.6	1808.2	1911.3	2034.4	2142.2	2244.7	2269.9	2235.9	2133.4
32.5°	1357.3	1405.3	1426.8	1506.3	1602.4	1746.5	1908.3	2053.5	2156.0	2182.0	2120.3
35°	1032.4	1033.0	1082.2	1117.4	1206.4	1354.7	1511.7	1706.2	1899.6	2046.1	2061.3
37.5°	823.8	826.7	856.5	891.6	958.4	1036.7	1175.0	1336.8	1560.1	1785.0	1916.8
40°	711.4	716.6	738.9	773.4	821.5	880.6	988.5	1140.8	1327.1	1577.4	1781.8
42.5°	639.1	647.7	659.2	685.8	715.6	770.9	858.2	975.9	1145.3	1381.9	1617.8
45°	550.8	555.4	564.3	576.5	603.5	642.2	700.8	779.9	920.5	1110.9	1347.0
47.5°	485.9	483.4	492.7	502.7	520.6	546.9	586.2	650.7	751.1	903.9	1104.1
50°	441.8	441.2	447.6	455.3	472.3	491.6	523.8	572.5	652.1	778.7	962.1
52.5°	400.5	402.8	407.3	416.8	429.1	444.7	473.6	508.7	577.1	686.4	839.3
55°	345.7	347.5	353.9	359.2	368.0	383.7	401.9	431.3	478.1	554.3	680.3
57.5°	299.3	298.5	304.7	306.0	315.9	328.8	342.9	365.7	399.6	456.2	541.1
60°	268.4	266.6	271.9	276.0	281.3	291.8	303.5	325.8	352.8	394.3	467.0
62.5°	240.2	239.4	243.3	247.4	251.8	261.3	271.2	288.3	309.6	344.7	402.3
65°	199.2	201.0	202.8	204.5	206.8	212.7	222.1	233.8	248.4	273.0	314.6
67.5°	156.5	158.3	158.9	162.6	167.6	171.3	176.9	187.4	197.6	218.3	242.0
70°	126.6	126.0	126.6	128.3	134.7	141.2	148.9	156.4	162.9	177.5	197.4
72.5°	108.7	107.7	109.3	109.6	112.7	114.5	119.3	126.5	134.7	144.7	159.0
75°	84.4	84.4	84.4	84.4	86.7	87.9	89.6	91.4	94.4	99.0	109.6
77.5°	62.3	62.4	63.3	63.9	64.3	65.0	66.1	67.8	68.9	71.4	75.9
80°	49.2	49.8	49.2	49.8	49.8	51.0	51.6	53.3	53.9	56.8	58.6
82.5°	37.0	36.7	37.0	37.6	37.6	38.8	38.9	40.2	40.3	41.8	43.6
85°	19.9	18.8	19.9	19.4	20.5	19.4	19.9	21.1	21.1	21.7	24.0
87.5°	7.7	8.5	7.6	8.0	7.9	8.4	8.3	8.2	9.0	8.4	8.6
90°	14.7	14.6	14.3	14.1	13.9	13.5	13.1	12.7	12.2	11.8	10.3
92.5°	16.3	16.2	16.0	15.9	15.8	15.3	14.6	13.9	13.3	12.6	11.5
95°	18.7	18.7	18.7	18.7	18.7	18.3	17.5	16.8	16.0	15.2	14.0
97.5°	20.2	20.1	20.0	19.9	19.8	19.3	18.4	17.6	16.7	15.8	23.7
100°	20.7	20.5	20.4	20.3	20.1	19.7	18.9	17.9	17.0	16.2	33.2
102.5°	21.0	20.8	20.7	20.4	20.2	21.5	24.2	26.9	29.6	32.3	50.9
105°	21.6	21.4	21.2	20.9	20.8	30.3	49.6	68.9	88.3	107.5	117.4
107.5°	67.8	82.4	96.9	111.5	126.1	140.4	154.6	168.8	183.0	197.1	195.5
110°	135.0	150.7	166.3	181.8	197.4	207.1	210.7	214.3	217.8	221.4	220.2



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	231.7	235.0	238.2	241.6	244.9	246.5	246.4	246.3	246.3	246.2	245.0
115°	288.8	288.3	287.9	287.4	287.0	286.3	285.2	284.0	283.0	281.9	280.9
117.5°	320.8	320.7	320.6	320.6	320.5	319.9	319.1	318.2	317.4	316.4	316.0
120°	342.8	342.8	342.8	342.8	342.8	342.3	341.5	340.6	339.8	338.8	338.5
122.5°	364.4	364.3	364.2	364.1	364.0	363.7	363.1	362.5	361.9	361.3	360.8
125°	394.9	394.6	394.4	394.2	394.0	393.7	393.5	393.3	393.0	392.9	392.4
127.5°	424.1	424.3	424.6	424.7	425.0	424.9	424.6	424.2	423.9	423.5	423.0
130°	443.0	443.2	443.4	443.6	443.8	443.7	443.2	442.8	442.4	442.0	441.5
132.5°	460.2	460.5	460.8	461.2	461.5	461.4	461.0	460.5	460.1	459.7	459.3
135°	486.6	487.0	487.3	487.7	487.9	487.9	487.7	487.3	487.0	486.6	486.2
137.5°	511.5	511.7	512.0	512.1	512.4	512.2	511.7	511.2	510.7	510.1	509.9
140°	526.4	526.7	526.8	527.1	527.3	527.2	526.8	526.3	525.9	525.5	525.1
142.5°	540.2	540.4	540.8	541.1	541.4	541.4	541.1	540.7	540.4	540.0	539.7
145°	561.3	561.3	561.3	561.3	561.3	561.2	560.9	560.8	560.5	560.3	560.1
147.5°	577.0	577.6	578.0	578.5	579.0	579.2	578.9	578.8	578.5	578.3	578.1
150°	588.8	589.1	589.4	589.8	590.1	590.1	590.0	589.7	589.5	589.3	589.1
152.5°	598.2	598.7	599.3	599.8	600.2	600.3	599.9	599.5	599.1	598.7	598.6
155°	611.4	612.1	612.7	613.4	614.0	614.1	613.5	612.9	612.4	611.9	611.7
157.5°	622.5	623.4	624.2	625.0	625.9	626.0	625.3	624.7	624.1	623.4	623.5
160°	629.6	630.3	631.1	631.9	632.6	632.7	632.0	631.4	630.7	630.1	630.2
162.5°	636.3	636.9	637.6	638.3	638.9	638.9	638.2	637.4	636.7	635.9	636.0
165°	644.3	645.1	645.8	646.6	647.4	647.3	646.4	645.6	644.7	643.8	643.9
167.5°	650.1	651.0	651.9	652.7	653.6	653.6	652.7	651.9	651.0	650.1	650.1
170°	653.6	654.5	655.4	656.3	657.1	657.1	656.3	655.4	654.5	653.6	653.6
172.5°	655.6	656.5	657.5	658.5	659.4	659.4	658.6	657.7	656.9	656.0	655.9
175°	658.5	659.4	660.3	661.2	662.0	662.1	661.3	660.6	659.8	659.0	658.9
177.5°	659.4	660.3	661.2	662.0	662.9	663.0	662.3	661.6	660.9	660.2	660.1
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1413.2	1411.9	1405.3	1397.8	1387.9	1381.4	1376.2	1373.5	1365.0	1354.7	1347.6
5°	1500.6	1483.0	1464.3	1441.4	1420.3	1398.6	1385.2	1369.3	1350.0	1328.4	1313.1
7.5°	1594.1	1559.6	1522.5	1484.2	1446.3	1412.4	1382.3	1356.7	1325.9	1294.8	1273.0
10°	1665.9	1615.4	1563.3	1509.9	1461.3	1415.7	1380.4	1345.9	1309.0	1273.2	1246.3
12.5°	1731.0	1664.7	1604.6	1539.0	1476.8	1422.2	1371.6	1330.9	1286.5	1248.4	1217.7
15°	1813.4	1745.5	1672.8	1573.2	1490.6	1421.5	1359.9	1306.7	1252.8	1205.8	1176.0
17.5°	1890.6	1788.3	1690.7	1607.6	1500.2	1413.8	1338.8	1275.0	1215.8	1166.1	1129.4
20°	1922.4	1823.4	1717.4	1611.4	1505.9	1409.2	1321.9	1251.5	1190.1	1133.8	1099.8
22.5°	1941.6	1829.5	1717.9	1603.9	1491.8	1391.4	1305.0	1227.7	1161.0	1107.5	1065.6
25°	1964.0	1830.5	1707.4	1594.9	1480.7	1371.7	1269.1	1187.1	1115.1	1058.2	1013.7
27.5°	1978.8	1821.7	1676.3	1551.2	1435.3	1326.8	1232.8	1145.8	1072.7	1012.6	964.8
30°	1981.7	1814.6	1652.3	1517.0	1399.2	1299.6	1200.0	1116.8	1039.5	975.6	931.1
32.5°	1985.4	1797.3	1620.0	1476.2	1355.6	1257.0	1166.7	1087.3	1008.1	945.1	899.7
35°	1970.0	1787.7	1570.9	1405.7	1285.0	1189.5	1108.0	1034.7	956.8	895.9	849.6
37.5°	1903.3	1749.6	1520.0	1326.2	1200.0	1111.6	1045.2	981.4	909.8	844.1	800.5
40°	1836.3	1712.1	1480.7	1277.9	1146.1	1055.2	995.5	943.4	874.3	812.7	765.9
42.5°	1736.5	1661.0	1443.2	1227.3	1085.1	997.6	947.2	898.4	837.7	775.2	731.2
45°	1553.3	1563.3	1366.4	1146.7	1000.7	912.9	865.4	831.5	777.6	726.0	680.9
47.5°	1323.6	1416.8	1276.3	1060.8	911.8	829.3	787.8	758.2	721.9	671.2	630.1
50°	1173.6	1306.7	1204.1	1003.2	856.1	774.0	733.0	708.9	677.3	637.5	598.2
52.5°	1035.4	1178.2	1116.9	938.9	795.6	720.6	680.5	660.7	635.6	598.1	562.6
55°	844.3	989.0	975.0	842.0	704.9	637.5	607.0	584.8	567.7	539.7	511.5
57.5°	682.9	820.2	827.4	734.2	625.0	558.4	532.2	515.4	504.3	483.0	457.0
60°	581.3	707.2	731.8	661.5	567.7	509.2	483.4	469.9	461.2	444.1	424.2
62.5°	496.9	604.1	632.0	581.3	512.9	458.1	437.9	424.9	419.0	404.3	386.8
65°	380.3	469.3	496.3	468.1	432.4	388.5	372.0	360.9	355.7	347.5	334.6
67.5°	285.9	350.9	380.4	360.6	347.7	319.9	309.5	303.5	298.9	293.2	282.4
70°	229.7	277.8	308.2	302.9	292.4	277.8	270.1	266.0	261.3	256.7	247.3
72.5°	184.7	217.7	246.3	249.0	240.4	237.5	230.7	229.0	226.2	220.6	215.4
75°	122.4	145.3	165.2	172.9	176.3	179.3	176.3	175.8	175.2	170.5	167.6
77.5°	80.2	92.6	105.1	118.1	123.6	127.6	128.5	130.7	129.2	126.7	125.3
80°	61.6	64.5	73.3	84.4	93.2	96.7	99.0	100.2	99.6	99.0	96.7
82.5°	44.7	47.1	51.2	59.1	66.5	72.3	73.7	73.4	74.7	75.1	73.3
85°	24.0	24.6	25.7	26.9	31.1	37.5	39.3	40.5	41.6	41.6	38.1
87.5°	9.3	8.5	9.2	9.0	10.2	10.4	13.0	15.1	15.8	14.1	14.4
90°	9.0	7.5	6.1	4.8	3.8	2.7	1.5	0.5	1.5	2.7	3.8
92.5°	10.4	9.4	8.3	7.9	8.2	8.5	8.9	9.1	8.9	8.5	8.2
95°	12.8	11.6	10.4	12.1	16.5	21.0	25.5	30.0	25.5	21.0	16.5
97.5°	31.5	39.3	47.3	52.2	54.2	56.2	58.2	60.2	58.2	56.2	54.2
100°	50.3	67.2	84.3	91.7	89.5	87.4	85.2	83.0	85.2	87.4	89.5
102.5°	69.5	88.1	106.7	115.2	113.7	112.1	110.5	108.9	110.5	112.1	113.7
105°	127.2	137.0	146.8	151.1	149.9	148.8	147.6	146.4	147.6	148.8	149.9
107.5°	194.0	192.4	190.9	189.7	188.7	187.8	186.8	185.8	186.8	187.8	188.7
110°	219.0	217.8	216.7	215.6	214.7	213.9	213.0	212.2	213.0	213.9	214.7





TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	243.8	242.6	241.4	240.4	239.6	238.8	238.1	237.3	238.1	238.8	239.6
115°	279.9	279.0	277.9	277.2	276.5	275.8	275.2	274.5	275.2	275.8	276.5
117.5°	315.5	315.0	314.4	313.7	313.0	312.2	311.3	310.6	311.3	312.2	313.0
120°	338.2	337.9	337.5	336.9	335.9	334.9	333.9	332.9	333.9	334.9	335.9
122.5°	360.4	360.0	359.6	359.0	358.2	357.3	356.5	355.8	356.5	357.3	358.2
125°	392.0	391.6	391.2	390.5	389.6	388.7	387.9	386.9	387.9	388.7	389.6
127.5°	422.5	421.9	421.4	420.7	419.8	419.0	418.1	417.2	418.1	419.0	419.8
130°	441.1	440.7	440.2	439.5	438.7	437.8	437.0	436.1	437.0	437.8	438.7
132.5°	458.9	458.6	458.2	457.6	456.8	455.9	455.0	454.2	455.0	455.9	456.8
135°	485.8	485.3	484.9	484.4	483.7	483.0	482.4	481.7	482.4	483.0	483.7
137.5°	509.6	509.4	509.2	508.6	507.8	507.0	506.2	505.3	506.2	507.0	507.8
140°	524.8	524.4	524.2	523.7	523.0	522.4	521.7	521.0	521.7	522.4	523.0
142.5°	539.3	539.0	538.6	538.2	537.5	536.9	536.2	535.5	536.2	536.9	537.5
145°	559.9	559.6	559.5	559.0	558.2	557.4	556.6	555.9	556.6	557.4	558.2
147.5°	577.8	577.6	577.4	577.0	576.5	576.1	575.6	575.1	575.6	576.1	576.5
150°	588.8	588.7	588.4	588.1	587.8	587.5	587.2	586.9	587.2	587.5	587.8
152.5°	598.5	598.3	598.2	598.1	597.9	597.7	597.6	597.4	597.6	597.7	597.9
155°	611.7	611.6	611.5	611.5	611.7	611.9	612.2	612.3	612.2	611.9	611.7
157.5°	623.6	623.7	623.8	623.9	623.9	623.9	624.0	624.0	624.0	623.9	623.9
160°	630.3	630.3	630.5	630.6	630.7	630.9	630.9	631.0	630.9	630.9	630.7
162.5°	636.2	636.3	636.4	636.5	636.9	637.1	637.4	637.7	637.4	637.1	636.9
165°	644.0	644.1	644.2	644.5	644.8	645.1	645.4	645.8	645.4	645.1	644.8
167.5°	650.1	650.1	650.1	650.3	650.7	651.2	651.6	652.0	651.6	651.2	650.7
170°	653.6	653.6	653.6	653.8	654.3	654.7	655.1	655.6	655.1	654.7	654.3
172.5°	655.8	655.7	655.7	655.8	656.3	656.9	657.5	658.0	657.5	656.9	656.3
175°	658.8	658.7	658.6	658.8	659.4	659.9	660.5	661.0	660.5	659.9	659.4
177.5°	660.0	660.0	659.9	660.0	660.5	660.9	661.3	661.8	661.3	660.9	660.5
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1345.3	1339.2	1335.0	1325.6	1319.6	1312.9	1306.4	1310.6	1310.2	1309.7	1309.7
5°	1300.2	1286.7	1274.5	1258.6	1248.6	1236.3	1226.9	1225.8	1228.1	1220.0	1215.2
7.5°	1255.4	1237.0	1219.6	1202.1	1183.6	1168.8	1159.6	1155.2	1149.3	1144.2	1138.9
10°	1224.0	1202.4	1185.3	1163.6	1143.8	1126.2	1115.1	1107.4	1103.3	1099.2	1091.6
12.5°	1191.7	1170.4	1148.8	1124.3	1105.4	1084.9	1076.6	1068.1	1060.2	1055.6	1045.2
15°	1144.4	1116.8	1094.0	1068.2	1047.1	1027.2	1015.5	998.4	996.1	990.2	979.7
17.5°	1096.9	1067.0	1035.4	1016.4	992.6	971.8	954.0	948.3	931.5	925.2	916.0
20°	1059.4	1031.8	1007.8	982.7	948.0	928.7	914.6	907.1	893.5	885.4	879.5
22.5°	1027.0	999.0	971.3	941.8	913.3	891.7	881.4	869.5	862.1	850.7	844.3
25°	980.9	950.4	917.0	885.4	864.9	848.4	832.1	821.5	811.0	805.6	793.9
27.5°	927.2	895.4	864.1	840.1	814.9	798.7	783.9	774.5	761.8	752.9	746.5
30°	897.7	860.1	833.2	811.5	779.3	764.1	752.9	741.2	731.8	722.5	716.0
32.5°	863.4	829.2	803.7	776.9	752.1	735.5	721.1	710.8	702.7	693.9	687.4
35°	809.8	781.1	754.7	727.7	709.6	692.6	675.6	666.8	659.2	651.0	645.1
37.5°	761.2	734.4	709.4	683.8	661.2	647.5	633.8	627.1	616.7	611.2	605.3
40°	731.2	704.9	678.0	653.3	629.9	619.3	607.0	597.1	587.7	583.6	577.1
42.5°	698.4	672.1	649.4	622.8	603.6	589.4	578.0	567.1	560.1	554.1	550.4
45°	649.8	626.4	604.1	577.7	559.6	547.3	534.3	524.4	518.0	513.8	507.4
47.5°	602.6	579.1	556.6	533.6	516.0	501.9	489.0	482.1	473.6	468.6	464.2
50°	568.3	547.3	523.2	502.1	484.6	470.5	459.9	451.2	443.6	437.1	434.2
52.5°	536.9	514.4	493.7	474.1	455.5	439.5	430.0	420.7	415.0	407.6	404.2
55°	485.2	463.5	445.9	426.5	408.4	394.9	383.2	375.0	369.1	360.9	356.3
57.5°	436.5	417.1	396.1	379.4	360.6	349.2	339.5	328.4	321.2	314.8	310.2
60°	403.7	381.4	363.3	347.5	331.1	316.4	307.6	298.9	291.2	284.7	280.7
62.5°	369.5	350.1	332.8	315.6	300.6	287.8	277.6	270.3	263.6	259.4	255.4
65°	317.0	301.8	284.2	270.1	256.1	246.7	238.5	232.0	227.3	224.4	220.9
67.5°	268.7	253.9	238.6	224.8	215.4	208.3	202.9	197.3	195.0	191.2	188.9
70°	237.3	222.1	208.6	198.0	188.6	183.4	179.9	175.8	173.4	168.8	166.4
72.5°	203.1	192.1	182.4	173.7	166.2	161.4	156.9	151.9	148.1	142.9	140.6
75°	160.0	150.0	142.4	136.6	131.8	125.4	118.9	113.7	111.9	110.1	109.6
77.5°	118.5	112.2	106.7	101.7	95.8	91.2	89.8	88.6	88.3	87.3	87.3
80°	93.2	87.3	83.2	77.3	73.8	73.8	73.8	72.7	73.3	73.3	73.3
82.5°	69.2	63.9	61.6	59.5	58.8	59.3	59.3	59.5	59.2	60.1	59.7
85°	35.7	36.3	37.5	36.9	37.5	37.5	38.7	38.1	38.7	37.5	38.7
87.5°	14.1	15.8	16.5	17.2	18.0	17.8	18.3	18.5	19.0	19.1	19.2
90°	4.8	6.1	7.5	9.0	10.3	11.8	12.2	12.7	13.1	13.5	13.9
92.5°	7.9	8.3	9.4	10.4	11.5	12.6	13.3	13.9	14.6	15.3	15.8
95°	12.1	10.4	11.6	12.8	14.0	15.2	16.0	16.8	17.5	18.3	18.7
97.5°	52.2	47.3	39.3	31.5	23.7	15.8	16.7	17.6	18.4	19.3	19.8
100°	91.7	84.3	67.2	50.3	33.2	16.2	17.0	17.9	18.9	19.7	20.1
102.5°	115.2	106.7	88.1	69.5	50.9	32.3	29.6	26.9	24.2	21.5	20.2
105°	151.1	146.8	137.0	127.2	117.4	107.5	88.3	68.9	49.6	30.3	20.8
107.5°	189.7	190.9	192.4	194.0	195.5	197.1	183.0	168.8	154.6	140.4	126.1
110°	215.6	216.7	217.8	219.0	220.2	221.4	217.8	214.3	210.7	207.1	197.4



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	240.4	241.4	242.6	243.8	245.0	246.2	246.3	246.3	246.4	246.5	244.9
115°	277.2	277.9	279.0	279.9	280.9	281.9	283.0	284.0	285.2	286.3	287.0
117.5°	313.7	314.4	315.0	315.5	316.0	316.4	317.4	318.2	319.1	319.9	320.5
120°	336.9	337.5	337.9	338.2	338.5	338.8	339.8	340.6	341.5	342.3	342.8
122.5°	359.0	359.6	360.0	360.4	360.8	361.3	361.9	362.5	363.1	363.7	364.0
125°	390.5	391.2	391.6	392.0	392.4	392.9	393.0	393.3	393.5	393.7	394.0
127.5°	420.7	421.4	421.9	422.5	423.0	423.5	423.9	424.2	424.6	424.9	425.0
130°	439.5	440.2	440.7	441.1	441.5	442.0	442.4	442.8	443.2	443.7	443.8
132.5°	457.6	458.2	458.6	458.9	459.3	459.7	460.1	460.5	461.0	461.4	461.5
135°	484.4	484.9	485.3	485.8	486.2	486.6	487.0	487.3	487.7	487.9	487.9
137.5°	508.6	509.2	509.4	509.6	509.9	510.1	510.7	511.2	511.7	512.2	512.4
140°	523.7	524.2	524.4	524.8	525.1	525.5	525.9	526.3	526.8	527.2	527.3
142.5°	538.2	538.6	539.0	539.3	539.7	540.0	540.4	540.7	541.1	541.4	541.4
145°	559.0	559.5	559.6	559.9	560.1	560.3	560.5	560.8	560.9	561.2	561.3
147.5°	577.0	577.4	577.6	577.8	578.1	578.3	578.5	578.8	578.9	579.2	579.0
150°	588.1	588.4	588.7	588.8	589.1	589.3	589.5	589.7	590.0	590.1	590.1
152.5°	598.1	598.2	598.3	598.5	598.6	598.7	599.1	599.5	599.9	600.3	600.2
155°	611.5	611.5	611.6	611.7	611.7	611.9	612.4	612.9	613.5	614.1	614.0
157.5°	623.9	623.8	623.7	623.6	623.5	623.4	624.1	624.7	625.3	626.0	625.9
160°	630.6	630.5	630.3	630.3	630.2	630.1	630.7	631.4	632.0	632.7	632.6
162.5°	636.5	636.4	636.3	636.2	636.0	635.9	636.7	637.4	638.2	638.9	638.9
165°	644.5	644.2	644.1	644.0	643.9	643.8	644.7	645.6	646.4	647.3	647.4
167.5°	650.3	650.1	650.1	650.1	650.1	650.1	651.0	651.9	652.7	653.6	653.6
170°	653.8	653.6	653.6	653.6	653.6	653.6	654.5	655.4	656.3	657.1	657.1
172.5°	655.8	655.7	655.7	655.8	655.9	656.0	656.9	657.7	658.6	659.4	659.4
175°	658.8	658.6	658.7	658.8	658.9	659.0	659.8	660.6	661.3	662.1	662.0
177.5°	660.0	659.9	660.0	660.0	660.1	660.2	660.9	661.6	662.3	663.0	662.9
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1304.1	1303.6	1304.1	1302.2	1304.1	1303.6	1304.1	1309.7	1309.7	1310.2	1310.6
5°	1213.5	1212.9	1211.2	1205.8	1211.2	1212.9	1213.5	1215.2	1220.0	1228.1	1225.8
7.5°	1134.4	1133.6	1128.4	1128.5	1128.4	1133.6	1134.4	1138.9	1144.2	1149.3	1155.2
10°	1087.5	1088.0	1081.1	1076.9	1081.1	1088.0	1087.5	1091.6	1099.2	1103.3	1107.4
12.5°	1042.1	1039.3	1033.7	1029.2	1033.7	1039.3	1042.1	1045.2	1055.6	1060.2	1068.1
15°	982.1	976.2	962.1	963.3	962.1	976.2	982.1	979.7	990.2	996.1	998.4
17.5°	911.4	907.1	906.8	898.6	906.8	907.1	911.4	916.0	925.2	931.5	948.3
20°	870.1	867.2	868.3	860.1	868.3	867.2	870.1	879.5	885.4	893.5	907.1
22.5°	837.8	834.8	829.9	827.3	829.9	834.8	837.8	844.3	850.7	862.1	869.5
25°	790.4	785.7	781.1	784.0	781.1	785.7	790.4	793.9	805.6	811.0	821.5
27.5°	743.1	739.6	734.9	734.3	734.9	739.6	743.1	746.5	752.9	761.8	774.5
30°	713.1	709.6	707.2	704.3	707.2	709.6	713.1	716.0	722.5	731.8	741.2
32.5°	682.6	681.9	677.7	677.1	677.7	681.9	682.6	687.4	693.9	702.7	710.8
35°	642.7	639.3	638.1	638.7	638.1	639.3	642.7	645.1	651.0	659.2	666.8
37.5°	604.9	600.2	598.1	596.0	598.1	600.2	604.9	605.3	611.2	616.7	627.1
40°	577.7	573.1	571.9	570.7	571.9	573.1	577.7	577.1	583.6	587.7	597.1
42.5°	547.3	545.4	544.7	542.6	544.7	545.4	547.3	550.4	554.1	560.1	567.1
45°	505.7	505.1	501.5	502.7	501.5	505.1	505.7	507.4	513.8	518.0	524.4
47.5°	461.8	459.3	456.8	458.4	456.8	459.3	461.8	464.2	468.6	473.6	482.1
50°	431.9	430.7	425.4	426.5	425.4	430.7	431.9	434.2	437.1	443.6	451.2
52.5°	401.8	397.4	395.4	394.7	395.4	397.4	401.8	404.2	407.6	415.0	420.7
55°	352.1	346.9	344.6	343.4	344.6	346.9	352.1	356.3	360.9	369.1	375.0
57.5°	303.4	302.0	300.1	301.4	300.1	302.0	303.4	310.2	314.8	321.2	328.4
60°	274.8	274.8	274.8	274.2	274.8	274.8	274.8	280.7	284.7	291.2	298.9
62.5°	252.8	251.3	250.9	251.8	250.9	251.3	252.8	255.4	259.4	263.6	270.3
65°	219.1	218.5	216.2	215.6	216.2	218.5	219.1	220.9	224.4	227.3	232.0
67.5°	187.4	185.3	184.6	183.7	184.6	185.3	187.4	188.9	191.2	195.0	197.3
70°	163.5	162.3	158.8	159.4	158.8	162.3	163.5	166.4	168.8	173.4	175.8
72.5°	137.7	136.6	135.8	135.0	135.8	136.6	137.7	140.6	142.9	148.1	151.9
75°	109.0	108.4	107.8	110.1	107.8	108.4	109.0	109.6	110.1	111.9	113.7
77.5°	87.3	87.3	87.6	86.7	87.6	87.3	87.3	87.3	87.3	88.3	88.6
80°	73.3	73.3	72.7	72.7	72.7	73.3	73.3	73.3	73.3	73.3	72.7
82.5°	58.7	59.2	59.5	58.6	59.5	59.2	58.7	59.7	60.1	59.2	59.5
85°	38.7	38.1	39.3	38.7	39.3	38.1	38.7	38.7	37.5	38.7	38.1
87.5°	20.1	19.3	19.3	19.8	19.3	19.3	20.1	19.2	19.1	19.0	18.5
90°	14.1	14.3	14.6	14.7	14.6	14.3	14.1	13.9	13.5	13.1	12.7
92.5°	15.9	16.0	16.2	16.3	16.2	16.0	15.9	15.8	15.3	14.6	13.9
95°	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.3	17.5	16.8
97.5°	19.9	20.0	20.1	20.2	20.1	20.0	19.9	19.8	19.3	18.4	17.6
100°	20.3	20.4	20.5	20.7	20.5	20.4	20.3	20.1	19.7	18.9	17.9
102.5°	20.4	20.7	20.8	21.0	20.8	20.7	20.4	20.2	21.5	24.2	26.9
105°	20.9	21.2	21.4	21.6	21.4	21.2	20.9	20.8	30.3	49.6	68.9
107.5°	111.5	96.9	82.4	67.8	82.4	96.9	111.5	126.1	140.4	154.6	168.8
110°	181.8	166.3	150.7	135.0	150.7	166.3	181.8	197.4	207.1	210.7	214.3



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	241.6	238.2	235.0	231.7	235.0	238.2	241.6	244.9	246.5	246.4	246.3
115°	287.4	287.9	288.3	288.8	288.3	287.9	287.4	287.0	286.3	285.2	284.0
117.5°	320.6	320.6	320.7	320.8	320.7	320.6	320.6	320.5	319.9	319.1	318.2
120°	342.8	342.8	342.8	342.8	342.8	342.8	342.8	342.8	342.3	341.5	340.6
122.5°	364.1	364.2	364.3	364.4	364.3	364.2	364.1	364.0	363.7	363.1	362.5
125°	394.2	394.4	394.6	394.9	394.6	394.4	394.2	394.0	393.7	393.5	393.3
127.5°	424.7	424.6	424.3	424.1	424.3	424.6	424.7	425.0	424.9	424.6	424.2
130°	443.6	443.4	443.2	443.0	443.2	443.4	443.6	443.8	443.7	443.2	442.8
132.5°	461.2	460.8	460.5	460.2	460.5	460.8	461.2	461.5	461.4	461.0	460.5
135°	487.7	487.3	487.0	486.6	487.0	487.3	487.7	487.9	487.9	487.7	487.3
137.5°	512.1	512.0	511.7	511.5	511.7	512.0	512.1	512.4	512.2	511.7	511.2
140°	527.1	526.8	526.7	526.4	526.7	526.8	527.1	527.3	527.2	526.8	526.3
142.5°	541.1	540.8	540.4	540.2	540.4	540.8	541.1	541.4	541.4	541.1	540.7
145°	561.3	561.3	561.3	561.3	561.3	561.3	561.3	561.3	561.2	560.9	560.8
147.5°	578.5	578.0	577.6	577.0	577.6	578.0	578.5	579.0	579.2	578.9	578.8
150°	589.8	589.4	589.1	588.8	589.1	589.4	589.8	590.1	590.1	590.0	589.7
152.5°	599.8	599.3	598.7	598.2	598.7	599.3	599.8	600.2	600.3	599.9	599.5
155°	613.4	612.7	612.1	611.4	612.1	612.7	613.4	614.0	614.1	613.5	612.9
157.5°	625.0	624.2	623.4	622.5	623.4	624.2	625.0	625.9	626.0	625.3	624.7
160°	631.9	631.1	630.3	629.6	630.3	631.1	631.9	632.6	632.7	632.0	631.4
162.5°	638.3	637.6	636.9	636.3	636.9	637.6	638.3	638.9	638.9	638.2	637.4
165°	646.6	645.8	645.1	644.3	645.1	645.8	646.6	647.4	647.3	646.4	645.6
167.5°	652.7	651.9	651.0	650.1	651.0	651.9	652.7	653.6	653.6	652.7	651.9
170°	656.3	655.4	654.5	653.6	654.5	655.4	656.3	657.1	657.1	656.3	655.4
172.5°	658.5	657.5	656.5	655.6	656.5	657.5	658.5	659.4	659.4	658.6	657.7
175°	661.2	660.3	659.4	658.5	659.4	660.3	661.2	662.0	662.1	661.3	660.6
177.5°	662.0	661.2	660.3	659.4	660.3	661.2	662.0	662.9	663.0	662.3	661.6
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1306.4	1312.9	1319.6	1325.6	1335.0	1339.2	1345.3	1347.6	1354.7	1365.0	1373.5
5°	1226.9	1236.3	1248.6	1258.6	1274.5	1286.7	1300.2	1313.1	1328.4	1350.0	1369.3
7.5°	1159.6	1168.8	1183.6	1202.1	1219.6	1237.0	1255.4	1273.0	1294.8	1325.9	1356.7
10°	1115.1	1126.2	1143.8	1163.6	1185.3	1202.4	1224.0	1246.3	1273.2	1309.0	1345.9
12.5°	1076.6	1084.9	1105.4	1124.3	1148.8	1170.4	1191.7	1217.7	1248.4	1286.5	1330.9
15°	1015.5	1027.2	1047.1	1068.2	1094.0	1116.8	1144.4	1176.0	1205.8	1252.8	1306.7
17.5°	954.0	971.8	992.6	1016.4	1035.4	1067.0	1096.9	1129.4	1166.1	1215.8	1275.0
20°	914.6	928.7	948.0	982.7	1007.8	1031.8	1059.4	1099.8	1133.8	1190.1	1251.5
22.5°	881.4	891.7	913.3	941.8	971.3	999.0	1027.0	1065.6	1107.5	1161.0	1227.7
25°	832.1	848.4	864.9	885.4	917.0	950.4	980.9	1013.7	1058.2	1115.1	1187.1
27.5°	783.9	798.7	814.9	840.1	864.1	895.4	927.2	964.8	1012.6	1072.7	1145.8
30°	752.9	764.1	779.3	811.5	833.2	860.1	897.7	931.1	975.6	1039.5	1116.8
32.5°	721.1	735.5	752.1	776.9	803.7	829.2	863.4	899.7	945.1	1008.1	1087.3
35°	675.6	692.6	709.6	727.7	754.7	781.1	809.8	849.6	895.9	956.8	1034.7
37.5°	633.8	647.5	661.2	683.8	709.4	734.4	761.2	800.5	844.1	909.8	981.4
40°	607.0	619.3	629.9	653.3	678.0	704.9	731.2	765.9	812.7	874.3	943.4
42.5°	578.0	589.4	603.6	622.8	649.4	672.1	698.4	731.2	775.2	837.7	898.4
45°	534.3	547.3	559.6	577.7	604.1	626.4	649.8	680.9	726.0	777.6	831.5
47.5°	489.0	501.9	516.0	533.6	556.6	579.1	602.6	630.1	671.2	721.9	758.2
50°	459.9	470.5	484.6	502.1	523.2	547.3	568.3	598.2	637.5	677.3	708.9
52.5°	430.0	439.5	455.5	474.1	493.7	514.4	536.9	562.6	598.1	635.6	660.7
55°	383.2	394.9	408.4	426.5	445.9	463.5	485.2	511.5	539.7	567.7	584.8
57.5°	339.5	349.2	360.6	379.4	396.1	417.1	436.5	457.0	483.0	504.3	515.4
60°	307.6	316.4	331.1	347.5	363.3	381.4	403.7	424.2	444.1	461.2	469.9
62.5°	277.6	287.8	300.6	315.6	332.8	350.1	369.5	386.8	404.3	419.0	424.9
65°	238.5	246.7	256.1	270.1	284.2	301.8	317.0	334.6	347.5	355.7	360.9
67.5°	202.9	208.3	215.4	224.8	238.6	253.9	268.7	282.4	293.2	298.9	303.5
70°	179.9	183.4	188.6	198.0	208.6	222.1	237.3	247.3	256.7	261.3	266.0
72.5°	156.9	161.4	166.2	173.7	182.4	192.1	203.1	215.4	220.6	226.2	229.0
75°	118.9	125.4	131.8	136.6	142.4	150.0	160.0	167.6	170.5	175.2	175.8
77.5°	89.8	91.2	95.8	101.7	106.7	112.2	118.5	125.3	126.7	129.2	130.7
80°	73.8	73.8	73.8	77.3	83.2	87.3	93.2	96.7	99.0	99.6	100.2
82.5°	59.3	59.3	58.8	59.5	61.6	63.9	69.2	73.3	75.1	74.7	73.4
85°	38.7	37.5	37.5	36.9	37.5	36.3	35.7	38.1	41.6	41.6	40.5
87.5°	18.3	17.8	18.0	17.2	16.5	15.8	14.1	14.4	14.1	15.8	15.1
90°	12.2	11.8	10.3	9.0	7.5	6.1	4.8	3.8	2.7	1.5	0.5
92.5°	13.3	12.6	11.5	10.4	9.4	8.3	7.9	8.2	8.5	8.9	9.1
95°	16.0	15.2	14.0	12.8	11.6	10.4	12.1	16.5	21.0	25.5	30.0
97.5°	16.7	15.8	23.7	31.5	39.3	47.3	52.2	54.2	56.2	58.2	60.2
100°	17.0	16.2	33.2	50.3	67.2	84.3	91.7	89.5	87.4	85.2	83.0
102.5°	29.6	32.3	50.9	69.5	88.1	106.7	115.2	113.7	112.1	110.5	108.9
105°	88.3	107.5	117.4	127.2	137.0	146.8	151.1	149.9	148.8	147.6	146.4
107.5°	183.0	197.1	195.5	194.0	192.4	190.9	189.7	188.7	187.8	186.8	185.8
110°	217.8	221.4	220.2	219.0	217.8	216.7	215.6	214.7	213.9	213.0	212.2



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	246.3	246.2	245.0	243.8	242.6	241.4	240.4	239.6	238.8	238.1	237.3
115°	283.0	281.9	280.9	279.9	279.0	277.9	277.2	276.5	275.8	275.2	274.5
117.5°	317.4	316.4	316.0	315.5	315.0	314.4	313.7	313.0	312.2	311.3	310.6
120°	339.8	338.8	338.5	338.2	337.9	337.5	336.9	335.9	334.9	333.9	332.9
122.5°	361.9	361.3	360.8	360.4	360.0	359.6	359.0	358.2	357.3	356.5	355.8
125°	393.0	392.9	392.4	392.0	391.6	391.2	390.5	389.6	388.7	387.9	386.9
127.5°	423.9	423.5	423.0	422.5	421.9	421.4	420.7	419.8	419.0	418.1	417.2
130°	442.4	442.0	441.5	441.1	440.7	440.2	439.5	438.7	437.8	437.0	436.1
132.5°	460.1	459.7	459.3	458.9	458.6	458.2	457.6	456.8	455.9	455.0	454.2
135°	487.0	486.6	486.2	485.8	485.3	484.9	484.4	483.7	483.0	482.4	481.7
137.5°	510.7	510.1	509.9	509.6	509.4	509.2	508.6	507.8	507.0	506.2	505.3
140°	525.9	525.5	525.1	524.8	524.4	524.2	523.7	523.0	522.4	521.7	521.0
142.5°	540.4	540.0	539.7	539.3	539.0	538.6	538.2	537.5	536.9	536.2	535.5
145°	560.5	560.3	560.1	559.9	559.6	559.5	559.0	558.2	557.4	556.6	555.9
147.5°	578.5	578.3	578.1	577.8	577.6	577.4	577.0	576.5	576.1	575.6	575.1
150°	589.5	589.3	589.1	588.8	588.7	588.4	588.1	587.8	587.5	587.2	586.9
152.5°	599.1	598.7	598.6	598.5	598.3	598.2	598.1	597.9	597.7	597.6	597.4
155°	612.4	611.9	611.7	611.7	611.6	611.5	611.5	611.7	611.9	612.2	612.3
157.5°	624.1	623.4	623.5	623.6	623.7	623.8	623.9	623.9	623.9	624.0	624.0
160°	630.7	630.1	630.2	630.3	630.3	630.5	630.6	630.7	630.9	630.9	631.0
162.5°	636.7	635.9	636.0	636.2	636.3	636.4	636.5	636.9	637.1	637.4	637.7
165°	644.7	643.8	643.9	644.0	644.1	644.2	644.5	644.8	645.1	645.4	645.8
167.5°	651.0	650.1	650.1	650.1	650.1	650.1	650.3	650.7	651.2	651.6	652.0
170°	654.5	653.6	653.6	653.6	653.6	653.6	653.8	654.3	654.7	655.1	655.6
172.5°	656.9	656.0	655.9	655.8	655.7	655.7	655.8	656.3	656.9	657.5	658.0
175°	659.8	659.0	658.9	658.8	658.7	658.6	658.8	659.4	659.9	660.5	661.0
177.5°	660.9	660.2	660.1	660.0	660.0	659.9	660.0	660.5	660.9	661.3	661.8
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1376.2	1381.4	1387.9	1397.8	1405.3	1411.9	1413.2	1415.1	1419.9	1427.8	1433.9
5°	1385.2	1398.6	1420.3	1441.4	1464.3	1483.0	1500.6	1512.9	1524.6	1549.2	1569.2
7.5°	1382.3	1412.4	1446.3	1484.2	1522.5	1559.6	1594.1	1625.0	1655.6	1691.5	1732.4
10°	1380.4	1415.7	1461.3	1509.9	1563.3	1615.4	1665.9	1705.1	1750.8	1791.8	1843.9
12.5°	1371.6	1422.2	1476.8	1539.0	1604.6	1664.7	1731.0	1785.2	1837.5	1896.8	1957.4
15°	1359.9	1421.5	1490.6	1573.2	1672.8	1745.5	1813.4	1907.8	1972.3	2036.7	2123.5
17.5°	1338.8	1413.8	1500.2	1607.6	1690.7	1788.3	1890.6	1965.1	2051.9	2142.8	2221.3
20°	1321.9	1409.2	1505.9	1611.4	1717.4	1823.4	1922.4	2011.6	2101.2	2206.1	2270.5
22.5°	1305.0	1391.4	1491.8	1603.9	1717.9	1829.5	1941.6	2046.3	2147.1	2252.9	2335.2
25°	1269.1	1371.7	1480.7	1594.9	1707.4	1830.5	1964.0	2080.7	2205.5	2314.5	2392.4
27.5°	1232.8	1326.8	1435.3	1551.2	1676.3	1821.7	1978.8	2111.3	2236.4	2314.5	2339.0
30°	1200.0	1299.6	1399.2	1517.0	1652.3	1814.6	1981.7	2133.4	2235.9	2269.9	2244.7
32.5°	1166.7	1257.0	1355.6	1476.2	1620.0	1797.3	1985.4	2120.3	2182.0	2156.0	2053.5
35°	1108.0	1189.5	1285.0	1405.7	1570.9	1787.7	1970.0	2061.3	2046.1	1899.6	1706.2
37.5°	1045.2	1111.6	1200.0	1326.2	1520.0	1749.6	1903.3	1916.8	1785.0	1560.1	1336.8
40°	995.5	1055.2	1146.1	1277.9	1480.7	1712.1	1836.3	1781.8	1577.4	1327.1	1140.8
42.5°	947.2	997.6	1085.1	1227.3	1443.2	1661.0	1736.5	1617.8	1381.9	1145.3	975.9
45°	865.4	912.9	1000.7	1146.7	1366.4	1563.3	1553.3	1347.0	1110.9	920.5	779.9
47.5°	787.8	829.3	911.8	1060.8	1276.3	1416.8	1323.6	1104.1	903.9	751.1	650.7
50°	733.0	774.0	856.1	1003.2	1204.1	1306.7	1173.6	962.1	778.7	652.1	572.5
52.5°	680.5	720.6	795.6	938.9	1116.9	1178.2	1035.4	839.3	686.4	577.1	508.7
55°	607.0	637.5	704.9	842.0	975.0	989.0	844.3	680.3	554.3	478.1	431.3
57.5°	532.2	558.4	625.0	734.2	827.4	820.2	682.9	541.1	456.2	399.6	365.7
60°	483.4	509.2	567.7	661.5	731.8	707.2	581.3	467.0	394.3	352.8	325.8
62.5°	437.9	458.1	512.9	581.3	632.0	604.1	496.9	402.3	344.7	309.6	288.3
65°	372.0	388.5	432.4	468.1	496.3	469.3	380.3	314.6	273.0	248.4	233.8
67.5°	309.5	319.9	347.7	360.6	380.4	350.9	285.9	242.0	218.3	197.6	187.4
70°	270.1	277.8	292.4	302.9	308.2	277.8	229.7	197.4	177.5	162.9	156.4
72.5°	230.7	237.5	240.4	249.0	246.3	217.7	184.7	159.0	144.7	134.7	126.5
75°	176.3	179.3	176.3	172.9	165.2	145.3	122.4	109.6	99.0	94.4	91.4
77.5°	128.5	127.6	123.6	118.1	105.1	92.6	80.2	75.9	71.4	68.9	67.8
80°	99.0	96.7	93.2	84.4	73.3	64.5	61.6	58.6	56.8	53.9	53.3
82.5°	73.7	72.3	66.5	59.1	51.2	47.1	44.7	43.6	41.8	40.3	40.2
85°	39.3	37.5	31.1	26.9	25.7	24.6	24.0	24.0	21.7	21.1	21.1
87.5°	13.0	10.4	10.2	9.0	9.2	8.5	9.3	8.6	8.4	9.0	8.2
90°	1.5	2.7	3.8	4.8	6.1	7.5	9.0	10.3	11.8	12.2	12.7
92.5°	8.9	8.5	8.2	7.9	8.3	9.4	10.4	11.5	12.6	13.3	13.9
95°	25.5	21.0	16.5	12.1	10.4	11.6	12.8	14.0	15.2	16.0	16.8
97.5°	58.2	56.2	54.2	52.2	47.3	39.3	31.5	23.7	15.8	16.7	17.6
100°	85.2	87.4	89.5	91.7	84.3	67.2	50.3	33.2	16.2	17.0	17.9
102.5°	110.5	112.1	113.7	115.2	106.7	88.1	69.5	50.9	32.3	29.6	26.9
105°	147.6	148.8	149.9	151.1	146.8	137.0	127.2	117.4	107.5	88.3	68.9
107.5°	186.8	187.8	188.7	189.7	190.9	192.4	194.0	195.5	197.1	183.0	168.8
110°	213.0	213.9	214.7	215.6	216.7	217.8	219.0	220.2	221.4	217.8	214.3





TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	238.1	238.8	239.6	240.4	241.4	242.6	243.8	245.0	246.2	246.3	246.3
115°	275.2	275.8	276.5	277.2	277.9	279.0	279.9	280.9	281.9	283.0	284.0
117.5°	311.3	312.2	313.0	313.7	314.4	315.0	315.5	316.0	316.4	317.4	318.2
120°	333.9	334.9	335.9	336.9	337.5	337.9	338.2	338.5	338.8	339.8	340.6
122.5°	356.5	357.3	358.2	359.0	359.6	360.0	360.4	360.8	361.3	361.9	362.5
125°	387.9	388.7	389.6	390.5	391.2	391.6	392.0	392.4	392.9	393.0	393.3
127.5°	418.1	419.0	419.8	420.7	421.4	421.9	422.5	423.0	423.5	423.9	424.2
130°	437.0	437.8	438.7	439.5	440.2	440.7	441.1	441.5	442.0	442.4	442.8
132.5°	455.0	455.9	456.8	457.6	458.2	458.6	458.9	459.3	459.7	460.1	460.5
135°	482.4	483.0	483.7	484.4	484.9	485.3	485.8	486.2	486.6	487.0	487.3
137.5°	506.2	507.0	507.8	508.6	509.2	509.4	509.6	509.9	510.1	510.7	511.2
140°	521.7	522.4	523.0	523.7	524.2	524.4	524.8	525.1	525.5	525.9	526.3
142.5°	536.2	536.9	537.5	538.2	538.6	539.0	539.3	539.7	540.0	540.4	540.7
145°	556.6	557.4	558.2	559.0	559.5	559.6	559.9	560.1	560.3	560.5	560.8
147.5°	575.6	576.1	576.5	577.0	577.4	577.6	577.8	578.1	578.3	578.5	578.8
150°	587.2	587.5	587.8	588.1	588.4	588.7	588.8	589.1	589.3	589.5	589.7
152.5°	597.6	597.7	597.9	598.1	598.2	598.3	598.5	598.6	598.7	599.1	599.5
155°	612.2	611.9	611.7	611.5	611.5	611.6	611.7	611.7	611.9	612.4	612.9
157.5°	624.0	623.9	623.9	623.9	623.8	623.7	623.6	623.5	623.4	624.1	624.7
160°	630.9	630.9	630.7	630.6	630.5	630.3	630.3	630.2	630.1	630.7	631.4
162.5°	637.4	637.1	636.9	636.5	636.4	636.3	636.2	636.0	635.9	636.7	637.4
165°	645.4	645.1	644.8	644.5	644.2	644.1	644.0	643.9	643.8	644.7	645.6
167.5°	651.6	651.2	650.7	650.3	650.1	650.1	650.1	650.1	650.1	651.0	651.9
170°	655.1	654.7	654.3	653.8	653.6	653.6	653.6	653.6	653.6	654.5	655.4
172.5°	657.5	656.9	656.3	655.8	655.7	655.7	655.8	655.9	656.0	656.9	657.7
175°	660.5	659.9	659.4	658.8	658.6	658.7	658.8	658.9	659.0	659.8	660.6
177.5°	661.3	660.9	660.5	660.0	659.9	660.0	660.0	660.1	660.2	660.9	661.6
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1443.7	1443.7	1445.6	1452.7	1453.6	1459.7	1457.8
5°	1586.7	1597.8	1602.0	1619.5	1630.0	1634.8	1625.4
7.5°	1761.6	1792.9	1807.8	1826.3	1842.5	1847.4	1834.7
10°	1889.0	1921.8	1949.4	1966.4	1982.2	1992.8	2006.2
12.5°	2012.3	2052.6	2078.8	2102.8	2119.1	2132.4	2134.7
15°	2146.3	2207.3	2253.5	2287.5	2304.5	2313.2	2309.8
17.5°	2281.4	2337.9	2370.8	2405.5	2429.1	2430.3	2430.9
20°	2357.8	2412.9	2451.0	2476.8	2503.1	2502.0	2507.8
22.5°	2408.9	2452.3	2481.5	2500.2	2509.2	2504.7	2505.9
25°	2432.8	2445.7	2440.4	2410.5	2403.0	2375.4	2380.1
27.5°	2309.5	2248.6	2185.6	2104.5	2040.5	1989.3	1991.9
30°	2142.2	2034.4	1911.3	1808.2	1715.6	1689.9	1634.8
32.5°	1908.3	1746.5	1602.4	1506.3	1426.8	1405.3	1357.3
35°	1511.7	1354.7	1206.4	1117.4	1082.2	1033.0	1032.4
37.5°	1175.0	1036.7	958.4	891.6	856.5	826.7	823.8
40°	988.5	880.6	821.5	773.4	738.9	716.6	711.4
42.5°	858.2	770.9	715.6	685.8	659.2	647.7	639.1
45°	700.8	642.2	603.5	576.5	564.3	555.4	550.8
47.5°	586.2	546.9	520.6	502.7	492.7	483.4	485.9
50°	523.8	491.6	472.3	455.3	447.6	441.2	441.8
52.5°	473.6	444.7	429.1	416.8	407.3	402.8	400.5
55°	401.9	383.7	368.0	359.2	353.9	347.5	345.7
57.5°	342.9	328.8	315.9	306.0	304.7	298.5	299.3
60°	303.5	291.8	281.3	276.0	271.9	266.6	268.4
62.5°	271.2	261.3	251.8	247.4	243.3	239.4	240.2
65°	222.1	212.7	206.8	204.5	202.8	201.0	199.2
67.5°	176.9	171.3	167.6	162.6	158.9	158.3	156.5
70°	148.9	141.2	134.7	128.3	126.6	126.0	126.6
72.5°	119.3	114.5	112.7	109.6	109.3	107.7	108.7
75°	89.6	87.9	86.7	84.4	84.4	84.4	84.4
77.5°	66.1	65.0	64.3	63.9	63.3	62.4	62.3
80°	51.6	51.0	49.8	49.8	49.2	49.8	49.2
82.5°	38.9	38.8	37.6	37.6	37.0	36.7	37.0
85°	19.9	19.4	20.5	19.4	19.9	18.8	19.9
87.5°	8.3	8.4	7.9	8.0	7.6	8.5	7.7
90°	13.1	13.5	13.9	14.1	14.3	14.6	14.7
92.5°	14.6	15.3	15.8	15.9	16.0	16.2	16.3
95°	17.5	18.3	18.7	18.7	18.7	18.7	18.7
97.5°	18.4	19.3	19.8	19.9	20.0	20.1	20.2
100°	18.9	19.7	20.1	20.3	20.4	20.5	20.7
102.5°	24.2	21.5	20.2	20.4	20.7	20.8	21.0
105°	49.6	30.3	20.8	20.9	21.2	21.4	21.6
107.5°	154.6	140.4	126.1	111.5	96.9	82.4	67.8
110°	210.7	207.1	197.4	181.8	166.3	150.7	135.0



TEST NUMBER: P332336-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	246.4	246.5	244.9	241.6	238.2	235.0	231.7
115°	285.2	286.3	287.0	287.4	287.9	288.3	288.8
117.5°	319.1	319.9	320.5	320.6	320.6	320.7	320.8
120°	341.5	342.3	342.8	342.8	342.8	342.8	342.8
122.5°	363.1	363.7	364.0	364.1	364.2	364.3	364.4
125°	393.5	393.7	394.0	394.2	394.4	394.6	394.9
127.5°	424.6	424.9	425.0	424.7	424.6	424.3	424.1
130°	443.2	443.7	443.8	443.6	443.4	443.2	443.0
132.5°	461.0	461.4	461.5	461.2	460.8	460.5	460.2
135°	487.7	487.9	487.9	487.7	487.3	487.0	486.6
137.5°	511.7	512.2	512.4	512.1	512.0	511.7	511.5
140°	526.8	527.2	527.3	527.1	526.8	526.7	526.4
142.5°	541.1	541.4	541.4	541.1	540.8	540.4	540.2
145°	560.9	561.2	561.3	561.3	561.3	561.3	561.3
147.5°	578.9	579.2	579.0	578.5	578.0	577.6	577.0
150°	590.0	590.1	590.1	589.8	589.4	589.1	588.8
152.5°	599.9	600.3	600.2	599.8	599.3	598.7	598.2
155°	613.5	614.1	614.0	613.4	612.7	612.1	611.4
157.5°	625.3	626.0	625.9	625.0	624.2	623.4	622.5
160°	632.0	632.7	632.6	631.9	631.1	630.3	629.6
162.5°	638.2	638.9	638.9	638.3	637.6	636.9	636.3
165°	646.4	647.3	647.4	646.6	645.8	645.1	644.3
167.5°	652.7	653.6	653.6	652.7	651.9	651.0	650.1
170°	656.3	657.1	657.1	656.3	655.4	654.5	653.6
172.5°	658.6	659.4	659.4	658.5	657.5	656.5	655.6
175°	661.3	662.1	662.0	661.2	660.3	659.4	658.5
177.5°	662.3	663.0	662.9	662.0	661.2	660.3	659.4
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0

(END OF REPORT)