

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332337-935

Luminaire Tested: **S123RDIP-S1000D585U935-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332337-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1000D585U935-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5142.0 lumens  
Efficiency: N/A  
Efficacy: 105.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 48.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

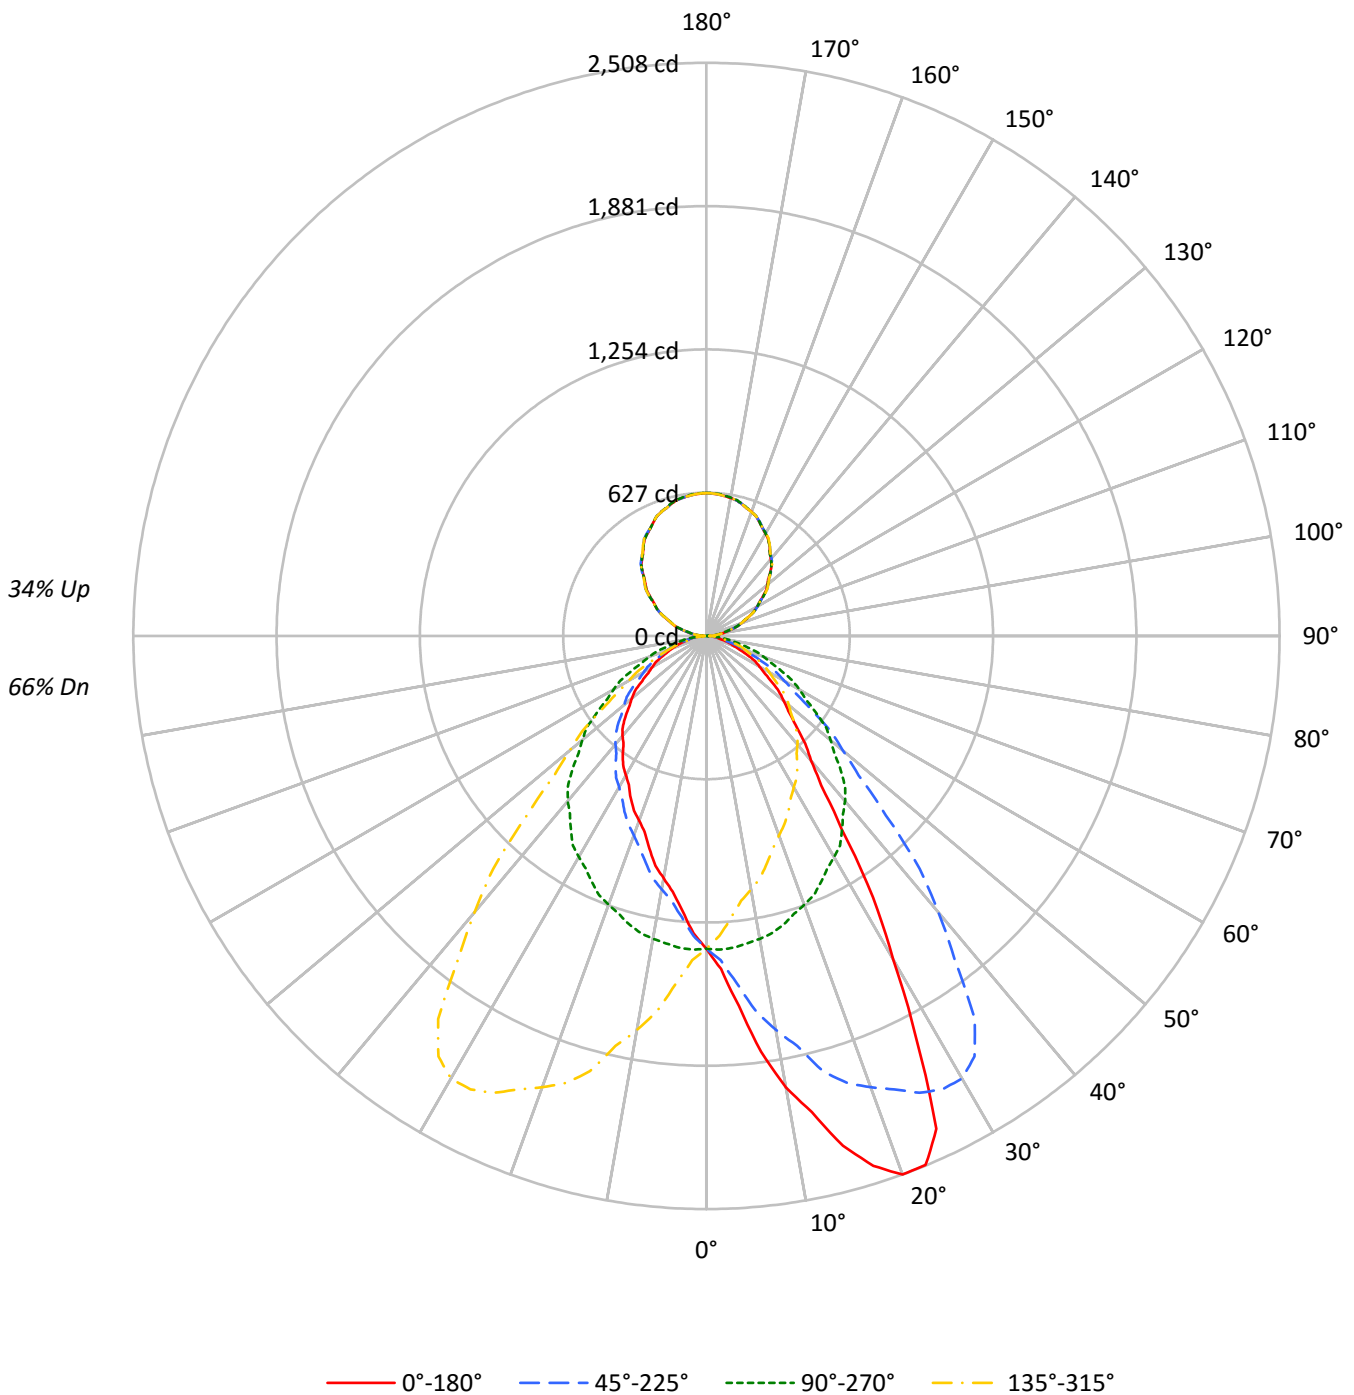



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66								
1	102	98	94	91	96	93	89	86	82	80	78	73	71	69	64	63	62	57								
2	94	87	81	76	88	82	77	72	73	69	66	65	62	59	57	55	53	49								
3	86	77	70	64	81	73	66	61	65	60	56	58	54	51	52	49	46	43								
4	79	69	61	55	74	65	58	53	58	53	49	52	48	44	47	43	40	37								
5	73	62	54	48	69	58	51	46	53	47	42	47	43	39	42	39	36	33								
6	68	56	48	42	64	53	46	40	48	42	37	43	38	35	39	35	32	29								
7	63	50	43	37	59	48	41	36	44	38	33	39	35	31	35	31	28	26								
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	33	29	26	24								
9	54	42	35	30	51	40	34	29	37	31	27	33	29	25	30	26	23	21								
10	51	39	32	27	48	37	31	26	34	28	25	31	26	23	28	24	21	20								

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	14733	14733	14733	14733
5°	17562	14795	13029	14795
10°	21928	14711	11770	14711
15°	25740	14561	10735	14561
20°	28726	14336	9852	14336
25°	28268	14099	9311	14099
30°	20319	13881	8754	13881
35°	13566	13596	8393	13596
40°	9996	13256	8019	13256
45°	8385	12657	7652	12657
50°	7398	11871	7142	11871
55°	6488	10975	6444	10975
60°	5778	10116	5903	10116
65°	5074	9192	5491	9192
70°	3984	8371	5017	8371
75°	3510	7311	4579	7311
80°	3050	6211	4506	6211
85°	2458	5002	4780	5002



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	134.6	2.6
10°-20°	420.5	8.2
20°-30°	660.6	12.8
30°-40°	689.3	13.4
40°-50°	589.9	11.5
50°-60°	449.6	8.7
60°-70°	288.2	5.6
70°-80°	138.6	2.7
80°-90°	38.5	0.7
90°-100°	40.7	0.8
100°-110°	121.9	2.4
110°-120°	207.3	4.0
120°-130°	272.7	5.3
130°-140°	306.5	6.0
140°-150°	301.3	5.9
150°-160°	253.7	4.9
160°-170°	168.9	3.3
170°-180°	59.1	1.1
0°-30°	1215.8	23.6
0°-40°	1905.0	37.0
0°-60°	2944.5	57.3
0°-90°	3409.8	66.3
90°-120°	370.0	7.2
90°-150°	1250.5	24.3
90°-180°	1732.0	33.7
0°-180°	5142.0	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1369	1369	1369	1369	1369	
5°	1625	1369	1206	1369	1625	168
15°	2310	1307	963	1307	2310	655
25°	2380	1187	784	1187	2380	1023
35°	1032	1035	639	1035	1032	677
45°	551	832	503	832	551	433
55°	346	585	343	585	346	313
65°	199	361	216	361	199	196
75°	84	176	110	176	84	90
85°	20	40	39	40	20	23
90°	15	0	15	0	15	8
95°	38	29	38	29	38	39
105°	117	110	117	110	117	124
115°	209	209	209	209	209	207
125°	302	306	302	306	302	270
135°	396	396	396	396	396	304
145°	481	481	481	481	481	300
155°	550	550	550	550	550	253
165°	598	600	598	600	598	169
175°	621	624	621	624	621	59
180°	625	625	625	625	625	



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1457.8	1459.7	1453.6	1452.7	1445.6	1443.7	1443.7	1433.9	1427.8	1419.9	1415.1
5°	1625.4	1634.8	1630.0	1619.5	1602.0	1597.8	1586.7	1569.2	1549.2	1524.6	1512.9
7.5°	1834.7	1847.4	1842.5	1826.3	1807.8	1792.9	1761.6	1732.4	1691.5	1655.6	1625.0
10°	2006.2	1992.8	1982.2	1966.4	1949.4	1921.8	1889.0	1843.9	1791.8	1750.8	1705.1
12.5°	2134.7	2132.4	2119.1	2102.8	2078.8	2052.6	2012.3	1957.4	1896.8	1837.5	1785.2
15°	2309.8	2313.2	2304.5	2287.5	2253.5	2207.3	2146.3	2123.5	2036.7	1972.3	1907.8
17.5°	2430.9	2430.3	2429.1	2405.5	2370.8	2337.9	2281.4	2221.3	2142.8	2051.9	1965.1
20°	2507.8	2502.0	2503.1	2476.8	2451.0	2412.9	2357.8	2270.5	2206.1	2101.2	2011.6
22.5°	2505.9	2504.7	2509.2	2500.2	2481.5	2452.3	2408.9	2335.2	2252.9	2147.1	2046.3
25°	2380.1	2375.4	2403.0	2410.5	2440.4	2445.7	2432.8	2392.4	2314.5	2205.5	2080.7
27.5°	1991.9	1989.3	2040.5	2104.5	2185.6	2248.6	2309.5	2339.0	2314.5	2236.4	2111.3
30°	1634.8	1689.9	1715.6	1808.2	1911.3	2034.4	2142.2	2244.7	2269.9	2235.9	2133.4
32.5°	1357.3	1405.3	1426.8	1506.3	1602.4	1746.5	1908.3	2053.5	2156.0	2182.0	2120.3
35°	1032.4	1033.0	1082.2	1117.4	1206.4	1354.7	1511.7	1706.2	1899.6	2046.1	2061.3
37.5°	823.8	826.7	856.5	891.6	958.4	1036.7	1175.0	1336.8	1560.1	1785.0	1916.8
40°	711.4	716.6	738.9	773.4	821.5	880.6	988.5	1140.8	1327.1	1577.4	1781.8
42.5°	639.1	647.7	659.2	685.8	715.6	770.9	858.2	975.9	1145.3	1381.9	1617.8
45°	550.8	555.4	564.3	576.5	603.5	642.2	700.8	779.9	920.5	1110.9	1347.0
47.5°	485.9	483.4	492.7	502.7	520.6	546.9	586.2	650.7	751.1	903.9	1104.1
50°	441.8	441.2	447.6	455.3	472.3	491.6	523.8	572.5	652.1	778.7	962.1
52.5°	400.5	402.8	407.3	416.8	429.1	444.7	473.6	508.7	577.1	686.4	839.3
55°	345.7	347.5	353.9	359.2	368.0	383.7	401.9	431.3	478.1	554.3	680.3
57.5°	299.3	298.5	304.7	306.0	315.9	328.8	342.9	365.7	399.6	456.2	541.1
60°	268.4	266.6	271.9	276.0	281.3	291.8	303.5	325.8	352.8	394.3	467.0
62.5°	240.2	239.4	243.3	247.4	251.8	261.3	271.2	288.3	309.6	344.7	402.3
65°	199.2	201.0	202.8	204.5	206.8	212.7	222.1	233.8	248.4	273.0	314.6
67.5°	156.5	158.3	158.9	162.6	167.6	171.3	176.9	187.4	197.6	218.3	242.0
70°	126.6	126.0	126.6	128.3	134.7	141.2	148.9	156.4	162.9	177.5	197.4
72.5°	108.7	107.7	109.3	109.6	112.7	114.5	119.3	126.5	134.7	144.7	159.0
75°	84.4	84.4	84.4	84.4	86.7	87.9	89.6	91.4	94.4	99.0	109.6
77.5°	62.3	62.4	63.3	63.9	64.3	65.0	66.1	67.8	68.9	71.4	75.9
80°	49.2	49.8	49.2	49.8	49.8	51.0	51.6	53.3	53.9	56.8	58.6
82.5°	37.0	36.7	37.0	37.6	37.6	38.8	38.9	40.2	40.3	41.8	43.6
85°	19.9	18.8	19.9	19.4	20.5	19.4	19.9	21.1	21.1	21.7	24.0
87.5°	7.7	8.5	7.6	8.0	7.9	8.4	8.3	8.2	9.0	8.4	8.6
90°	14.7	14.6	14.3	14.1	13.9	13.5	13.1	12.7	12.2	11.8	10.3
92.5°	19.8	20.0	20.1	20.2	20.4	20.2	19.9	19.5	19.2	18.9	18.1
95°	38.3	38.3	38.3	38.3	38.3	38.1	37.6	37.2	36.8	36.3	35.5
97.5°	58.9	59.0	59.0	59.1	59.1	58.9	58.4	57.9	57.3	56.9	56.2
100°	74.6	74.4	74.2	74.0	73.8	73.5	73.2	72.8	72.5	72.2	71.6
102.5°	90.7	90.8	90.8	90.9	90.9	90.7	90.5	90.1	89.8	89.5	88.8
105°	116.9	116.7	116.4	116.2	116.0	115.9	115.9	115.9	115.9	115.9	114.9
107.5°	144.1	144.2	144.4	144.5	144.6	144.5	144.1	143.8	143.4	143.1	142.8
110°	162.6	162.8	163.0	163.2	163.4	163.3	162.9	162.5	162.0	161.6	161.4



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	182.2	182.3	182.3	182.4	182.4	182.1	181.6	181.1	180.6	180.0	180.0
115°	209.2	209.3	209.4	209.6	209.7	209.7	209.6	209.4	209.3	209.2	209.4
117.5°	236.6	236.9	237.2	237.5	237.8	238.0	238.0	238.1	238.1	238.1	238.4
120°	255.9	256.1	256.3	256.5	256.8	256.9	257.0	257.1	257.3	257.4	257.9
122.5°	274.3	274.7	274.9	275.3	275.5	275.9	276.1	276.4	276.7	277.0	277.2
125°	302.0	302.5	302.9	303.3	303.8	304.2	304.6	305.1	305.5	306.0	306.2
127.5°	329.6	330.1	330.6	331.1	331.7	332.2	332.8	333.4	334.1	334.7	334.8
130°	347.7	348.4	349.2	350.0	350.8	351.4	351.8	352.2	352.7	353.1	353.4
132.5°	366.5	367.1	367.7	368.3	368.9	369.5	370.0	370.5	371.0	371.6	371.8
135°	395.8	396.1	396.2	396.5	396.7	397.0	397.4	397.9	398.4	398.8	398.9
137.5°	421.6	422.1	422.5	422.9	423.4	423.8	424.2	424.6	425.2	425.6	425.3
140°	438.6	439.3	440.1	440.8	441.6	442.0	442.1	442.3	442.4	442.5	442.4
142.5°	455.8	456.4	457.0	457.6	458.2	458.6	458.7	458.7	458.9	459.0	458.8
145°	480.8	481.2	481.6	482.1	482.5	482.8	482.9	483.0	483.1	483.3	482.9
147.5°	503.0	503.7	504.3	505.0	505.6	505.9	505.9	505.9	505.9	505.9	505.7
150°	517.1	517.8	518.4	519.1	519.8	520.0	520.0	520.0	520.0	520.0	519.9
152.5°	530.9	531.5	532.0	532.6	533.1	533.4	533.2	533.0	532.8	532.6	532.5
155°	549.6	550.4	551.0	551.8	552.6	552.8	552.3	551.9	551.5	551.0	551.0
157.5°	566.5	567.1	567.7	568.3	568.9	569.0	568.6	568.2	567.7	567.2	567.1
160°	577.6	578.0	578.4	578.9	579.3	579.2	578.7	578.2	577.6	577.0	577.0
162.5°	585.8	586.5	587.2	587.9	588.6	588.7	588.1	587.5	587.0	586.5	586.4
165°	597.7	598.5	599.2	599.9	600.7	600.8	600.1	599.5	598.8	598.1	598.1
167.5°	607.8	608.5	609.2	609.8	610.5	610.5	609.8	609.2	608.5	607.8	607.7
170°	612.9	613.6	614.4	615.2	616.0	616.0	615.2	614.4	613.6	612.9	612.9
172.5°	616.8	617.6	618.4	619.1	619.9	619.9	619.2	618.5	617.9	617.3	617.3
175°	621.2	622.0	622.8	623.5	624.3	624.4	623.7	623.0	622.4	621.7	621.7
177.5°	623.6	624.2	624.8	625.4	626.0	626.1	625.6	625.1	624.5	624.0	624.0
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1413.2	1411.9	1405.3	1397.8	1387.9	1381.4	1376.2	1373.5	1365.0	1354.7	1347.6
5°	1500.6	1483.0	1464.3	1441.4	1420.3	1398.6	1385.2	1369.3	1350.0	1328.4	1313.1
7.5°	1594.1	1559.6	1522.5	1484.2	1446.3	1412.4	1382.3	1356.7	1325.9	1294.8	1273.0
10°	1665.9	1615.4	1563.3	1509.9	1461.3	1415.7	1380.4	1345.9	1309.0	1273.2	1246.3
12.5°	1731.0	1664.7	1604.6	1539.0	1476.8	1422.2	1371.6	1330.9	1286.5	1248.4	1217.7
15°	1813.4	1745.5	1672.8	1573.2	1490.6	1421.5	1359.9	1306.7	1252.8	1205.8	1176.0
17.5°	1890.6	1788.3	1690.7	1607.6	1500.2	1413.8	1338.8	1275.0	1215.8	1166.1	1129.4
20°	1922.4	1823.4	1717.4	1611.4	1505.9	1409.2	1321.9	1251.5	1190.1	1133.8	1099.8
22.5°	1941.6	1829.5	1717.9	1603.9	1491.8	1391.4	1305.0	1227.7	1161.0	1107.5	1065.6
25°	1964.0	1830.5	1707.4	1594.9	1480.7	1371.7	1269.1	1187.1	1115.1	1058.2	1013.7
27.5°	1978.8	1821.7	1676.3	1551.2	1435.3	1326.8	1232.8	1145.8	1072.7	1012.6	964.8
30°	1981.7	1814.6	1652.3	1517.0	1399.2	1299.6	1200.0	1116.8	1039.5	975.6	931.1
32.5°	1985.4	1797.3	1620.0	1476.2	1355.6	1257.0	1166.7	1087.3	1008.1	945.1	899.7
35°	1970.0	1787.7	1570.9	1405.7	1285.0	1189.5	1108.0	1034.7	956.8	895.9	849.6
37.5°	1903.3	1749.6	1520.0	1326.2	1200.0	1111.6	1045.2	981.4	909.8	844.1	800.5
40°	1836.3	1712.1	1480.7	1277.9	1146.1	1055.2	995.5	943.4	874.3	812.7	765.9
42.5°	1736.5	1661.0	1443.2	1227.3	1085.1	997.6	947.2	898.4	837.7	775.2	731.2
45°	1553.3	1563.3	1366.4	1146.7	1000.7	912.9	865.4	831.5	777.6	726.0	680.9
47.5°	1323.6	1416.8	1276.3	1060.8	911.8	829.3	787.8	758.2	721.9	671.2	630.1
50°	1173.6	1306.7	1204.1	1003.2	856.1	774.0	733.0	708.9	677.3	637.5	598.2
52.5°	1035.4	1178.2	1116.9	938.9	795.6	720.6	680.5	660.7	635.6	598.1	562.6
55°	844.3	989.0	975.0	842.0	704.9	637.5	607.0	584.8	567.7	539.7	511.5
57.5°	682.9	820.2	827.4	734.2	625.0	558.4	532.2	515.4	504.3	483.0	457.0
60°	581.3	707.2	731.8	661.5	567.7	509.2	483.4	469.9	461.2	444.1	424.2
62.5°	496.9	604.1	632.0	581.3	512.9	458.1	437.9	424.9	419.0	404.3	386.8
65°	380.3	469.3	496.3	468.1	432.4	388.5	372.0	360.9	355.7	347.5	334.6
67.5°	285.9	350.9	380.4	360.6	347.7	319.9	309.5	303.5	298.9	293.2	282.4
70°	229.7	277.8	308.2	302.9	292.4	277.8	270.1	266.0	261.3	256.7	247.3
72.5°	184.7	217.7	246.3	249.0	240.4	237.5	230.7	229.0	226.2	220.6	215.4
75°	122.4	145.3	165.2	172.9	176.3	179.3	176.3	175.8	175.2	170.5	167.6
77.5°	80.2	92.6	105.1	118.1	123.6	127.6	128.5	130.7	129.2	126.7	125.3
80°	61.6	64.5	73.3	84.4	93.2	96.7	99.0	100.2	99.6	99.0	96.7
82.5°	44.7	47.1	51.2	59.1	66.5	72.3	73.7	73.4	74.7	75.1	73.3
85°	24.0	24.6	25.7	26.9	31.1	37.5	39.3	40.5	41.6	41.6	38.1
87.5°	9.3	8.5	9.2	9.0	10.2	10.4	13.0	15.1	15.8	14.1	14.4
90°	9.0	7.5	6.1	4.8	3.8	2.7	1.5	0.5	1.5	2.7	3.8
92.5°	17.2	16.4	15.7	14.9	14.1	13.3	12.7	11.9	12.7	13.3	14.1
95°	34.6	33.8	32.9	32.0	31.3	30.5	29.7	29.0	29.7	30.5	31.3
97.5°	55.6	54.9	54.3	53.7	53.2	52.6	52.0	51.5	52.0	52.6	53.2
100°	71.1	70.5	70.0	69.4	68.8	68.1	67.4	66.8	67.4	68.1	68.8
102.5°	88.1	87.3	86.6	86.0	85.7	85.2	84.9	84.5	84.9	85.2	85.7
105°	113.9	113.0	111.9	111.4	111.2	110.9	110.7	110.5	110.7	110.9	111.2
107.5°	142.3	141.9	141.5	141.3	141.1	141.0	140.9	140.8	140.9	141.0	141.1
110°	161.2	160.9	160.7	160.5	160.2	160.1	159.8	159.6	159.8	160.1	160.2





TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	179.9	179.9	179.9	179.8	179.6	179.5	179.3	179.3	179.3	179.5	179.6
115°	209.7	209.8	210.1	210.0	209.7	209.4	209.1	208.7	209.1	209.4	209.7
117.5°	238.7	238.9	239.2	239.3	239.0	238.8	238.6	238.4	238.6	238.8	239.0
120°	258.5	259.0	259.5	259.5	258.8	258.1	257.5	256.8	257.5	258.1	258.8
122.5°	277.6	277.8	278.1	278.0	277.5	277.1	276.6	276.1	276.6	277.1	277.5
125°	306.4	306.6	306.9	306.8	306.4	306.1	305.8	305.5	305.8	306.1	306.4
127.5°	335.1	335.4	335.6	335.4	334.7	334.0	333.3	332.6	333.3	334.0	334.7
130°	353.8	354.1	354.4	354.1	353.3	352.4	351.5	350.7	351.5	352.4	353.3
132.5°	372.0	372.3	372.6	372.2	371.3	370.5	369.6	368.7	369.6	370.5	371.3
135°	399.0	399.1	399.2	398.9	398.3	397.6	397.0	396.3	397.0	397.6	398.3
137.5°	425.0	424.7	424.5	424.0	423.5	422.9	422.4	421.9	422.4	422.9	423.5
140°	442.3	442.1	442.0	441.7	441.2	440.7	440.1	439.5	440.1	440.7	441.2
142.5°	458.6	458.4	458.2	457.8	457.3	456.8	456.2	455.6	456.2	456.8	457.3
145°	482.6	482.2	481.9	481.6	481.5	481.2	481.0	480.8	481.0	481.2	481.5
147.5°	505.3	505.1	504.7	504.4	503.9	503.6	503.2	502.8	503.2	503.6	503.9
150°	519.6	519.4	519.2	519.0	518.8	518.6	518.3	518.1	518.3	518.6	518.8
152.5°	532.4	532.3	532.1	531.9	531.6	531.3	531.0	530.7	531.0	531.3	531.6
155°	550.8	550.7	550.6	550.5	550.5	550.5	550.5	550.5	550.5	550.5	550.5
157.5°	567.1	567.0	566.9	566.9	567.1	567.1	567.3	567.4	567.3	567.1	567.1
160°	577.0	577.0	577.0	577.1	577.4	577.6	577.8	578.0	577.8	577.6	577.4
162.5°	586.3	586.3	586.2	586.3	586.5	586.9	587.1	587.5	587.1	586.9	586.5
165°	598.1	598.1	598.1	598.3	598.7	599.0	599.3	599.6	599.3	599.0	598.7
167.5°	607.6	607.5	607.4	607.6	608.0	608.5	608.9	609.3	608.9	608.5	608.0
170°	612.9	612.9	612.9	613.1	613.5	614.0	614.4	614.8	614.4	614.0	613.5
172.5°	617.3	617.3	617.3	617.4	617.9	618.3	618.7	619.1	618.7	618.3	617.9
175°	621.7	621.7	621.7	622.0	622.4	622.8	623.3	623.7	623.3	622.8	622.4
177.5°	624.0	624.0	624.0	624.1	624.5	624.9	625.3	625.6	625.3	624.9	624.5
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1345.3	1339.2	1335.0	1325.6	1319.6	1312.9	1306.4	1310.6	1310.2	1309.7	1309.7
5°	1300.2	1286.7	1274.5	1258.6	1248.6	1236.3	1226.9	1225.8	1228.1	1220.0	1215.2
7.5°	1255.4	1237.0	1219.6	1202.1	1183.6	1168.8	1159.6	1155.2	1149.3	1144.2	1138.9
10°	1224.0	1202.4	1185.3	1163.6	1143.8	1126.2	1115.1	1107.4	1103.3	1099.2	1091.6
12.5°	1191.7	1170.4	1148.8	1124.3	1105.4	1084.9	1076.6	1068.1	1060.2	1055.6	1045.2
15°	1144.4	1116.8	1094.0	1068.2	1047.1	1027.2	1015.5	998.4	996.1	990.2	979.7
17.5°	1096.9	1067.0	1035.4	1016.4	992.6	971.8	954.0	948.3	931.5	925.2	916.0
20°	1059.4	1031.8	1007.8	982.7	948.0	928.7	914.6	907.1	893.5	885.4	879.5
22.5°	1027.0	999.0	971.3	941.8	913.3	891.7	881.4	869.5	862.1	850.7	844.3
25°	980.9	950.4	917.0	885.4	864.9	848.4	832.1	821.5	811.0	805.6	793.9
27.5°	927.2	895.4	864.1	840.1	814.9	798.7	783.9	774.5	761.8	752.9	746.5
30°	897.7	860.1	833.2	811.5	779.3	764.1	752.9	741.2	731.8	722.5	716.0
32.5°	863.4	829.2	803.7	776.9	752.1	735.5	721.1	710.8	702.7	693.9	687.4
35°	809.8	781.1	754.7	727.7	709.6	692.6	675.6	666.8	659.2	651.0	645.1
37.5°	761.2	734.4	709.4	683.8	661.2	647.5	633.8	627.1	616.7	611.2	605.3
40°	731.2	704.9	678.0	653.3	629.9	619.3	607.0	597.1	587.7	583.6	577.1
42.5°	698.4	672.1	649.4	622.8	603.6	589.4	578.0	567.1	560.1	554.1	550.4
45°	649.8	626.4	604.1	577.7	559.6	547.3	534.3	524.4	518.0	513.8	507.4
47.5°	602.6	579.1	556.6	533.6	516.0	501.9	489.0	482.1	473.6	468.6	464.2
50°	568.3	547.3	523.2	502.1	484.6	470.5	459.9	451.2	443.6	437.1	434.2
52.5°	536.9	514.4	493.7	474.1	455.5	439.5	430.0	420.7	415.0	407.6	404.2
55°	485.2	463.5	445.9	426.5	408.4	394.9	383.2	375.0	369.1	360.9	356.3
57.5°	436.5	417.1	396.1	379.4	360.6	349.2	339.5	328.4	321.2	314.8	310.2
60°	403.7	381.4	363.3	347.5	331.1	316.4	307.6	298.9	291.2	284.7	280.7
62.5°	369.5	350.1	332.8	315.6	300.6	287.8	277.6	270.3	263.6	259.4	255.4
65°	317.0	301.8	284.2	270.1	256.1	246.7	238.5	232.0	227.3	224.4	220.9
67.5°	268.7	253.9	238.6	224.8	215.4	208.3	202.9	197.3	195.0	191.2	188.9
70°	237.3	222.1	208.6	198.0	188.6	183.4	179.9	175.8	173.4	168.8	166.4
72.5°	203.1	192.1	182.4	173.7	166.2	161.4	156.9	151.9	148.1	142.9	140.6
75°	160.0	150.0	142.4	136.6	131.8	125.4	118.9	113.7	111.9	110.1	109.6
77.5°	118.5	112.2	106.7	101.7	95.8	91.2	89.8	88.6	88.3	87.3	87.3
80°	93.2	87.3	83.2	77.3	73.8	73.8	73.8	72.7	73.3	73.3	73.3
82.5°	69.2	63.9	61.6	59.5	58.8	59.3	59.3	59.5	59.2	60.1	59.7
85°	35.7	36.3	37.5	36.9	37.5	37.5	38.7	38.1	38.7	37.5	38.7
87.5°	14.1	15.8	16.5	17.2	18.0	17.8	18.3	18.5	19.0	19.1	19.2
90°	4.8	6.1	7.5	9.0	10.3	11.8	12.2	12.7	13.1	13.5	13.9
92.5°	14.9	15.7	16.4	17.2	18.1	18.9	19.2	19.5	19.9	20.2	20.4
95°	32.0	32.9	33.8	34.6	35.5	36.3	36.8	37.2	37.6	38.1	38.3
97.5°	53.7	54.3	54.9	55.6	56.2	56.9	57.3	57.9	58.4	58.9	59.1
100°	69.4	70.0	70.5	71.1	71.6	72.2	72.5	72.8	73.2	73.5	73.8
102.5°	86.0	86.6	87.3	88.1	88.8	89.5	89.8	90.1	90.5	90.7	90.9
105°	111.4	111.9	113.0	113.9	114.9	115.9	115.9	115.9	115.9	115.9	116.0
107.5°	141.3	141.5	141.9	142.3	142.8	143.1	143.4	143.8	144.1	144.5	144.6
110°	160.5	160.7	160.9	161.2	161.4	161.6	162.0	162.5	162.9	163.3	163.4



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	179.8	179.9	179.9	179.9	180.0	180.0	180.6	181.1	181.6	182.1	182.4
115°	210.0	210.1	209.8	209.7	209.4	209.2	209.3	209.4	209.6	209.7	209.7
117.5°	239.3	239.2	238.9	238.7	238.4	238.1	238.1	238.1	238.0	238.0	237.8
120°	259.5	259.5	259.0	258.5	257.9	257.4	257.3	257.1	257.0	256.9	256.8
122.5°	278.0	278.1	277.8	277.6	277.2	277.0	276.7	276.4	276.1	275.9	275.5
125°	306.8	306.9	306.6	306.4	306.2	306.0	305.5	305.1	304.6	304.2	303.8
127.5°	335.4	335.6	335.4	335.1	334.8	334.7	334.1	333.4	332.8	332.2	331.7
130°	354.1	354.4	354.1	353.8	353.4	353.1	352.7	352.2	351.8	351.4	350.8
132.5°	372.2	372.6	372.3	372.0	371.8	371.6	371.0	370.5	370.0	369.5	368.9
135°	398.9	399.2	399.1	399.0	398.9	398.8	398.4	397.9	397.4	397.0	396.7
137.5°	424.0	424.5	424.7	425.0	425.3	425.6	425.2	424.6	424.2	423.8	423.4
140°	441.7	442.0	442.1	442.3	442.4	442.5	442.4	442.3	442.1	442.0	441.6
142.5°	457.8	458.2	458.4	458.6	458.8	459.0	458.9	458.7	458.7	458.6	458.2
145°	481.6	481.9	482.2	482.6	482.9	483.3	483.1	483.0	482.9	482.8	482.5
147.5°	504.4	504.7	505.1	505.3	505.7	505.9	505.9	505.9	505.9	505.9	505.6
150°	519.0	519.2	519.4	519.6	519.9	520.0	520.0	520.0	520.0	520.0	519.8
152.5°	531.9	532.1	532.3	532.4	532.5	532.6	532.8	533.0	533.2	533.4	533.1
155°	550.5	550.6	550.7	550.8	551.0	551.0	551.5	551.9	552.3	552.8	552.6
157.5°	566.9	566.9	567.0	567.1	567.1	567.2	567.7	568.2	568.6	569.0	568.9
160°	577.1	577.0	577.0	577.0	577.0	577.0	577.6	578.2	578.7	579.2	579.3
162.5°	586.3	586.2	586.3	586.3	586.4	586.5	587.0	587.5	588.1	588.7	588.6
165°	598.3	598.1	598.1	598.1	598.1	598.1	598.8	599.5	600.1	600.8	600.7
167.5°	607.6	607.4	607.5	607.6	607.7	607.8	608.5	609.2	609.8	610.5	610.5
170°	613.1	612.9	612.9	612.9	612.9	612.9	613.6	614.4	615.2	616.0	616.0
172.5°	617.4	617.3	617.3	617.3	617.3	617.3	617.9	618.5	619.2	619.9	619.9
175°	622.0	621.7	621.7	621.7	621.7	621.7	622.4	623.0	623.7	624.4	624.3
177.5°	624.1	624.0	624.0	624.0	624.0	624.0	624.5	625.1	625.6	626.1	626.0
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1304.1	1303.6	1304.1	1302.2	1304.1	1303.6	1304.1	1309.7	1309.7	1310.2	1310.6
5°	1213.5	1212.9	1211.2	1205.8	1211.2	1212.9	1213.5	1215.2	1220.0	1228.1	1225.8
7.5°	1134.4	1133.6	1128.4	1128.5	1128.4	1133.6	1134.4	1138.9	1144.2	1149.3	1155.2
10°	1087.5	1088.0	1081.1	1076.9	1081.1	1088.0	1087.5	1091.6	1099.2	1103.3	1107.4
12.5°	1042.1	1039.3	1033.7	1029.2	1033.7	1039.3	1042.1	1045.2	1055.6	1060.2	1068.1
15°	982.1	976.2	962.1	963.3	962.1	976.2	982.1	979.7	990.2	996.1	998.4
17.5°	911.4	907.1	906.8	898.6	906.8	907.1	911.4	916.0	925.2	931.5	948.3
20°	870.1	867.2	868.3	860.1	868.3	867.2	870.1	879.5	885.4	893.5	907.1
22.5°	837.8	834.8	829.9	827.3	829.9	834.8	837.8	844.3	850.7	862.1	869.5
25°	790.4	785.7	781.1	784.0	781.1	785.7	790.4	793.9	805.6	811.0	821.5
27.5°	743.1	739.6	734.9	734.3	734.9	739.6	743.1	746.5	752.9	761.8	774.5
30°	713.1	709.6	707.2	704.3	707.2	709.6	713.1	716.0	722.5	731.8	741.2
32.5°	682.6	681.9	677.7	677.1	677.7	681.9	682.6	687.4	693.9	702.7	710.8
35°	642.7	639.3	638.1	638.7	638.1	639.3	642.7	645.1	651.0	659.2	666.8
37.5°	604.9	600.2	598.1	596.0	598.1	600.2	604.9	605.3	611.2	616.7	627.1
40°	577.7	573.1	571.9	570.7	571.9	573.1	577.7	577.1	583.6	587.7	597.1
42.5°	547.3	545.4	544.7	542.6	544.7	545.4	547.3	550.4	554.1	560.1	567.1
45°	505.7	505.1	501.5	502.7	501.5	505.1	505.7	507.4	513.8	518.0	524.4
47.5°	461.8	459.3	456.8	458.4	456.8	459.3	461.8	464.2	468.6	473.6	482.1
50°	431.9	430.7	425.4	426.5	425.4	430.7	431.9	434.2	437.1	443.6	451.2
52.5°	401.8	397.4	395.4	394.7	395.4	397.4	401.8	404.2	407.6	415.0	420.7
55°	352.1	346.9	344.6	343.4	344.6	346.9	352.1	356.3	360.9	369.1	375.0
57.5°	303.4	302.0	300.1	301.4	300.1	302.0	303.4	310.2	314.8	321.2	328.4
60°	274.8	274.8	274.8	274.2	274.8	274.8	274.8	280.7	284.7	291.2	298.9
62.5°	252.8	251.3	250.9	251.8	250.9	251.3	252.8	255.4	259.4	263.6	270.3
65°	219.1	218.5	216.2	215.6	216.2	218.5	219.1	220.9	224.4	227.3	232.0
67.5°	187.4	185.3	184.6	183.7	184.6	185.3	187.4	188.9	191.2	195.0	197.3
70°	163.5	162.3	158.8	159.4	158.8	162.3	163.5	166.4	168.8	173.4	175.8
72.5°	137.7	136.6	135.8	135.0	135.8	136.6	137.7	140.6	142.9	148.1	151.9
75°	109.0	108.4	107.8	110.1	107.8	108.4	109.0	109.6	110.1	111.9	113.7
77.5°	87.3	87.3	87.6	86.7	87.6	87.3	87.3	87.3	87.3	88.3	88.6
80°	73.3	73.3	72.7	72.7	72.7	73.3	73.3	73.3	73.3	73.3	72.7
82.5°	58.7	59.2	59.5	58.6	59.5	59.2	58.7	59.7	60.1	59.2	59.5
85°	38.7	38.1	39.3	38.7	39.3	38.1	38.7	38.7	37.5	38.7	38.1
87.5°	20.1	19.3	19.3	19.8	19.3	19.3	20.1	19.2	19.1	19.0	18.5
90°	14.1	14.3	14.6	14.7	14.6	14.3	14.1	13.9	13.5	13.1	12.7
92.5°	20.2	20.1	20.0	19.8	20.0	20.1	20.2	20.4	20.2	19.9	19.5
95°	38.3	38.3	38.3	38.3	38.3	38.3	38.3	38.3	38.1	37.6	37.2
97.5°	59.1	59.0	59.0	58.9	59.0	59.0	59.1	59.1	58.9	58.4	57.9
100°	74.0	74.2	74.4	74.6	74.4	74.2	74.0	73.8	73.5	73.2	72.8
102.5°	90.9	90.8	90.8	90.7	90.8	90.8	90.9	90.9	90.7	90.5	90.1
105°	116.2	116.4	116.7	116.9	116.7	116.4	116.2	116.0	115.9	115.9	115.9
107.5°	144.5	144.4	144.2	144.1	144.2	144.4	144.5	144.6	144.5	144.1	143.8
110°	163.2	163.0	162.8	162.6	162.8	163.0	163.2	163.4	163.3	162.9	162.5



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	182.4	182.3	182.3	182.2	182.3	182.3	182.4	182.4	182.1	181.6	181.1
115°	209.6	209.4	209.3	209.2	209.3	209.4	209.6	209.7	209.7	209.6	209.4
117.5°	237.5	237.2	236.9	236.6	236.9	237.2	237.5	237.8	238.0	238.0	238.1
120°	256.5	256.3	256.1	255.9	256.1	256.3	256.5	256.8	256.9	257.0	257.1
122.5°	275.3	274.9	274.7	274.3	274.7	274.9	275.3	275.5	275.9	276.1	276.4
125°	303.3	302.9	302.5	302.0	302.5	302.9	303.3	303.8	304.2	304.6	305.1
127.5°	331.1	330.6	330.1	329.6	330.1	330.6	331.1	331.7	332.2	332.8	333.4
130°	350.0	349.2	348.4	347.7	348.4	349.2	350.0	350.8	351.4	351.8	352.2
132.5°	368.3	367.7	367.1	366.5	367.1	367.7	368.3	368.9	369.5	370.0	370.5
135°	396.5	396.2	396.1	395.8	396.1	396.2	396.5	396.7	397.0	397.4	397.9
137.5°	422.9	422.5	422.1	421.6	422.1	422.5	422.9	423.4	423.8	424.2	424.6
140°	440.8	440.1	439.3	438.6	439.3	440.1	440.8	441.6	442.0	442.1	442.3
142.5°	457.6	457.0	456.4	455.8	456.4	457.0	457.6	458.2	458.6	458.7	458.7
145°	482.1	481.6	481.2	480.8	481.2	481.6	482.1	482.5	482.8	482.9	483.0
147.5°	505.0	504.3	503.7	503.0	503.7	504.3	505.0	505.6	505.9	505.9	505.9
150°	519.1	518.4	517.8	517.1	517.8	518.4	519.1	519.8	520.0	520.0	520.0
152.5°	532.6	532.0	531.5	530.9	531.5	532.0	532.6	533.1	533.4	533.2	533.0
155°	551.8	551.0	550.4	549.6	550.4	551.0	551.8	552.6	552.8	552.3	551.9
157.5°	568.3	567.7	567.1	566.5	567.1	567.7	568.3	568.9	569.0	568.6	568.2
160°	578.9	578.4	578.0	577.6	578.0	578.4	578.9	579.3	579.2	578.7	578.2
162.5°	587.9	587.2	586.5	585.8	586.5	587.2	587.9	588.6	588.7	588.1	587.5
165°	599.9	599.2	598.5	597.7	598.5	599.2	599.9	600.7	600.8	600.1	599.5
167.5°	609.8	609.2	608.5	607.8	608.5	609.2	609.8	610.5	610.5	609.8	609.2
170°	615.2	614.4	613.6	612.9	613.6	614.4	615.2	616.0	616.0	615.2	614.4
172.5°	619.1	618.4	617.6	616.8	617.6	618.4	619.1	619.9	619.9	619.2	618.5
175°	623.5	622.8	622.0	621.2	622.0	622.8	623.5	624.3	624.4	623.7	623.0
177.5°	625.4	624.8	624.2	623.6	624.2	624.8	625.4	626.0	626.1	625.6	625.1
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1306.4	1312.9	1319.6	1325.6	1335.0	1339.2	1345.3	1347.6	1354.7	1365.0	1373.5
5°	1226.9	1236.3	1248.6	1258.6	1274.5	1286.7	1300.2	1313.1	1328.4	1350.0	1369.3
7.5°	1159.6	1168.8	1183.6	1202.1	1219.6	1237.0	1255.4	1273.0	1294.8	1325.9	1356.7
10°	1115.1	1126.2	1143.8	1163.6	1185.3	1202.4	1224.0	1246.3	1273.2	1309.0	1345.9
12.5°	1076.6	1084.9	1105.4	1124.3	1148.8	1170.4	1191.7	1217.7	1248.4	1286.5	1330.9
15°	1015.5	1027.2	1047.1	1068.2	1094.0	1116.8	1144.4	1176.0	1205.8	1252.8	1306.7
17.5°	954.0	971.8	992.6	1016.4	1035.4	1067.0	1096.9	1129.4	1166.1	1215.8	1275.0
20°	914.6	928.7	948.0	982.7	1007.8	1031.8	1059.4	1099.8	1133.8	1190.1	1251.5
22.5°	881.4	891.7	913.3	941.8	971.3	999.0	1027.0	1065.6	1107.5	1161.0	1227.7
25°	832.1	848.4	864.9	885.4	917.0	950.4	980.9	1013.7	1058.2	1115.1	1187.1
27.5°	783.9	798.7	814.9	840.1	864.1	895.4	927.2	964.8	1012.6	1072.7	1145.8
30°	752.9	764.1	779.3	811.5	833.2	860.1	897.7	931.1	975.6	1039.5	1116.8
32.5°	721.1	735.5	752.1	776.9	803.7	829.2	863.4	899.7	945.1	1008.1	1087.3
35°	675.6	692.6	709.6	727.7	754.7	781.1	809.8	849.6	895.9	956.8	1034.7
37.5°	633.8	647.5	661.2	683.8	709.4	734.4	761.2	800.5	844.1	909.8	981.4
40°	607.0	619.3	629.9	653.3	678.0	704.9	731.2	765.9	812.7	874.3	943.4
42.5°	578.0	589.4	603.6	622.8	649.4	672.1	698.4	731.2	775.2	837.7	898.4
45°	534.3	547.3	559.6	577.7	604.1	626.4	649.8	680.9	726.0	777.6	831.5
47.5°	489.0	501.9	516.0	533.6	556.6	579.1	602.6	630.1	671.2	721.9	758.2
50°	459.9	470.5	484.6	502.1	523.2	547.3	568.3	598.2	637.5	677.3	708.9
52.5°	430.0	439.5	455.5	474.1	493.7	514.4	536.9	562.6	598.1	635.6	660.7
55°	383.2	394.9	408.4	426.5	445.9	463.5	485.2	511.5	539.7	567.7	584.8
57.5°	339.5	349.2	360.6	379.4	396.1	417.1	436.5	457.0	483.0	504.3	515.4
60°	307.6	316.4	331.1	347.5	363.3	381.4	403.7	424.2	444.1	461.2	469.9
62.5°	277.6	287.8	300.6	315.6	332.8	350.1	369.5	386.8	404.3	419.0	424.9
65°	238.5	246.7	256.1	270.1	284.2	301.8	317.0	334.6	347.5	355.7	360.9
67.5°	202.9	208.3	215.4	224.8	238.6	253.9	268.7	282.4	293.2	298.9	303.5
70°	179.9	183.4	188.6	198.0	208.6	222.1	237.3	247.3	256.7	261.3	266.0
72.5°	156.9	161.4	166.2	173.7	182.4	192.1	203.1	215.4	220.6	226.2	229.0
75°	118.9	125.4	131.8	136.6	142.4	150.0	160.0	167.6	170.5	175.2	175.8
77.5°	89.8	91.2	95.8	101.7	106.7	112.2	118.5	125.3	126.7	129.2	130.7
80°	73.8	73.8	73.8	77.3	83.2	87.3	93.2	96.7	99.0	99.6	100.2
82.5°	59.3	59.3	58.8	59.5	61.6	63.9	69.2	73.3	75.1	74.7	73.4
85°	38.7	37.5	37.5	36.9	37.5	36.3	35.7	38.1	41.6	41.6	40.5
87.5°	18.3	17.8	18.0	17.2	16.5	15.8	14.1	14.4	14.1	15.8	15.1
90°	12.2	11.8	10.3	9.0	7.5	6.1	4.8	3.8	2.7	1.5	0.5
92.5°	19.2	18.9	18.1	17.2	16.4	15.7	14.9	14.1	13.3	12.7	11.9
95°	36.8	36.3	35.5	34.6	33.8	32.9	32.0	31.3	30.5	29.7	29.0
97.5°	57.3	56.9	56.2	55.6	54.9	54.3	53.7	53.2	52.6	52.0	51.5
100°	72.5	72.2	71.6	71.1	70.5	70.0	69.4	68.8	68.1	67.4	66.8
102.5°	89.8	89.5	88.8	88.1	87.3	86.6	86.0	85.7	85.2	84.9	84.5
105°	115.9	115.9	114.9	113.9	113.0	111.9	111.4	111.2	110.9	110.7	110.5
107.5°	143.4	143.1	142.8	142.3	141.9	141.5	141.3	141.1	141.0	140.9	140.8
110°	162.0	161.6	161.4	161.2	160.9	160.7	160.5	160.2	160.1	159.8	159.6



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	180.6	180.0	180.0	179.9	179.9	179.9	179.8	179.6	179.5	179.3	179.3
115°	209.3	209.2	209.4	209.7	209.8	210.1	210.0	209.7	209.4	209.1	208.7
117.5°	238.1	238.1	238.4	238.7	238.9	239.2	239.3	239.0	238.8	238.6	238.4
120°	257.3	257.4	257.9	258.5	259.0	259.5	259.5	258.8	258.1	257.5	256.8
122.5°	276.7	277.0	277.2	277.6	277.8	278.1	278.0	277.5	277.1	276.6	276.1
125°	305.5	306.0	306.2	306.4	306.6	306.9	306.8	306.4	306.1	305.8	305.5
127.5°	334.1	334.7	334.8	335.1	335.4	335.6	335.4	334.7	334.0	333.3	332.6
130°	352.7	353.1	353.4	353.8	354.1	354.4	354.1	353.3	352.4	351.5	350.7
132.5°	371.0	371.6	371.8	372.0	372.3	372.6	372.2	371.3	370.5	369.6	368.7
135°	398.4	398.8	398.9	399.0	399.1	399.2	398.9	398.3	397.6	397.0	396.3
137.5°	425.2	425.6	425.3	425.0	424.7	424.5	424.0	423.5	422.9	422.4	421.9
140°	442.4	442.5	442.4	442.3	442.1	442.0	441.7	441.2	440.7	440.1	439.5
142.5°	458.9	459.0	458.8	458.6	458.4	458.2	457.8	457.3	456.8	456.2	455.6
145°	483.1	483.3	482.9	482.6	482.2	481.9	481.6	481.5	481.2	481.0	480.8
147.5°	505.9	505.9	505.7	505.3	505.1	504.7	504.4	503.9	503.6	503.2	502.8
150°	520.0	520.0	519.9	519.6	519.4	519.2	519.0	518.8	518.6	518.3	518.1
152.5°	532.8	532.6	532.5	532.4	532.3	532.1	531.9	531.6	531.3	531.0	530.7
155°	551.5	551.0	551.0	550.8	550.7	550.6	550.5	550.5	550.5	550.5	550.5
157.5°	567.7	567.2	567.1	567.1	567.0	566.9	566.9	567.1	567.1	567.3	567.4
160°	577.6	577.0	577.0	577.0	577.0	577.0	577.1	577.4	577.6	577.8	578.0
162.5°	587.0	586.5	586.4	586.3	586.3	586.2	586.3	586.5	586.9	587.1	587.5
165°	598.8	598.1	598.1	598.1	598.1	598.1	598.3	598.7	599.0	599.3	599.6
167.5°	608.5	607.8	607.7	607.6	607.5	607.4	607.6	608.0	608.5	608.9	609.3
170°	613.6	612.9	612.9	612.9	612.9	612.9	613.1	613.5	614.0	614.4	614.8
172.5°	617.9	617.3	617.3	617.3	617.3	617.3	617.4	617.9	618.3	618.7	619.1
175°	622.4	621.7	621.7	621.7	621.7	621.7	622.0	622.4	622.8	623.3	623.7
177.5°	624.5	624.0	624.0	624.0	624.0	624.0	624.1	624.5	624.9	625.3	625.6
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1376.2	1381.4	1387.9	1397.8	1405.3	1411.9	1413.2	1415.1	1419.9	1427.8	1433.9
5°	1385.2	1398.6	1420.3	1441.4	1464.3	1483.0	1500.6	1512.9	1524.6	1549.2	1569.2
7.5°	1382.3	1412.4	1446.3	1484.2	1522.5	1559.6	1594.1	1625.0	1655.6	1691.5	1732.4
10°	1380.4	1415.7	1461.3	1509.9	1563.3	1615.4	1665.9	1705.1	1750.8	1791.8	1843.9
12.5°	1371.6	1422.2	1476.8	1539.0	1604.6	1664.7	1731.0	1785.2	1837.5	1896.8	1957.4
15°	1359.9	1421.5	1490.6	1573.2	1672.8	1745.5	1813.4	1907.8	1972.3	2036.7	2123.5
17.5°	1338.8	1413.8	1500.2	1607.6	1690.7	1788.3	1890.6	1965.1	2051.9	2142.8	2221.3
20°	1321.9	1409.2	1505.9	1611.4	1717.4	1823.4	1922.4	2011.6	2101.2	2206.1	2270.5
22.5°	1305.0	1391.4	1491.8	1603.9	1717.9	1829.5	1941.6	2046.3	2147.1	2252.9	2335.2
25°	1269.1	1371.7	1480.7	1594.9	1707.4	1830.5	1964.0	2080.7	2205.5	2314.5	2392.4
27.5°	1232.8	1326.8	1435.3	1551.2	1676.3	1821.7	1978.8	2111.3	2236.4	2314.5	2339.0
30°	1200.0	1299.6	1399.2	1517.0	1652.3	1814.6	1981.7	2133.4	2235.9	2269.9	2244.7
32.5°	1166.7	1257.0	1355.6	1476.2	1620.0	1797.3	1985.4	2120.3	2182.0	2156.0	2053.5
35°	1108.0	1189.5	1285.0	1405.7	1570.9	1787.7	1970.0	2061.3	2046.1	1899.6	1706.2
37.5°	1045.2	1111.6	1200.0	1326.2	1520.0	1749.6	1903.3	1916.8	1785.0	1560.1	1336.8
40°	995.5	1055.2	1146.1	1277.9	1480.7	1712.1	1836.3	1781.8	1577.4	1327.1	1140.8
42.5°	947.2	997.6	1085.1	1227.3	1443.2	1661.0	1736.5	1617.8	1381.9	1145.3	975.9
45°	865.4	912.9	1000.7	1146.7	1366.4	1563.3	1553.3	1347.0	1110.9	920.5	779.9
47.5°	787.8	829.3	911.8	1060.8	1276.3	1416.8	1323.6	1104.1	903.9	751.1	650.7
50°	733.0	774.0	856.1	1003.2	1204.1	1306.7	1173.6	962.1	778.7	652.1	572.5
52.5°	680.5	720.6	795.6	938.9	1116.9	1178.2	1035.4	839.3	686.4	577.1	508.7
55°	607.0	637.5	704.9	842.0	975.0	989.0	844.3	680.3	554.3	478.1	431.3
57.5°	532.2	558.4	625.0	734.2	827.4	820.2	682.9	541.1	456.2	399.6	365.7
60°	483.4	509.2	567.7	661.5	731.8	707.2	581.3	467.0	394.3	352.8	325.8
62.5°	437.9	458.1	512.9	581.3	632.0	604.1	496.9	402.3	344.7	309.6	288.3
65°	372.0	388.5	432.4	468.1	496.3	469.3	380.3	314.6	273.0	248.4	233.8
67.5°	309.5	319.9	347.7	360.6	380.4	350.9	285.9	242.0	218.3	197.6	187.4
70°	270.1	277.8	292.4	302.9	308.2	277.8	229.7	197.4	177.5	162.9	156.4
72.5°	230.7	237.5	240.4	249.0	246.3	217.7	184.7	159.0	144.7	134.7	126.5
75°	176.3	179.3	176.3	172.9	165.2	145.3	122.4	109.6	99.0	94.4	91.4
77.5°	128.5	127.6	123.6	118.1	105.1	92.6	80.2	75.9	71.4	68.9	67.8
80°	99.0	96.7	93.2	84.4	73.3	64.5	61.6	58.6	56.8	53.9	53.3
82.5°	73.7	72.3	66.5	59.1	51.2	47.1	44.7	43.6	41.8	40.3	40.2
85°	39.3	37.5	31.1	26.9	25.7	24.6	24.0	24.0	21.7	21.1	21.1
87.5°	13.0	10.4	10.2	9.0	9.2	8.5	9.3	8.6	8.4	9.0	8.2
90°	1.5	2.7	3.8	4.8	6.1	7.5	9.0	10.3	11.8	12.2	12.7
92.5°	12.7	13.3	14.1	14.9	15.7	16.4	17.2	18.1	18.9	19.2	19.5
95°	29.7	30.5	31.3	32.0	32.9	33.8	34.6	35.5	36.3	36.8	37.2
97.5°	52.0	52.6	53.2	53.7	54.3	54.9	55.6	56.2	56.9	57.3	57.9
100°	67.4	68.1	68.8	69.4	70.0	70.5	71.1	71.6	72.2	72.5	72.8
102.5°	84.9	85.2	85.7	86.0	86.6	87.3	88.1	88.8	89.5	89.8	90.1
105°	110.7	110.9	111.2	111.4	111.9	113.0	113.9	114.9	115.9	115.9	115.9
107.5°	140.9	141.0	141.1	141.3	141.5	141.9	142.3	142.8	143.1	143.4	143.8
110°	159.8	160.1	160.2	160.5	160.7	160.9	161.2	161.4	161.6	162.0	162.5





TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	179.3	179.5	179.6	179.8	179.9	179.9	179.9	180.0	180.0	180.6	181.1
115°	209.1	209.4	209.7	210.0	210.1	209.8	209.7	209.4	209.2	209.3	209.4
117.5°	238.6	238.8	239.0	239.3	239.2	238.9	238.7	238.4	238.1	238.1	238.1
120°	257.5	258.1	258.8	259.5	259.5	259.0	258.5	257.9	257.4	257.3	257.1
122.5°	276.6	277.1	277.5	278.0	278.1	277.8	277.6	277.2	277.0	276.7	276.4
125°	305.8	306.1	306.4	306.8	306.9	306.6	306.4	306.2	306.0	305.5	305.1
127.5°	333.3	334.0	334.7	335.4	335.6	335.4	335.1	334.8	334.7	334.1	333.4
130°	351.5	352.4	353.3	354.1	354.4	354.1	353.8	353.4	353.1	352.7	352.2
132.5°	369.6	370.5	371.3	372.2	372.6	372.3	372.0	371.8	371.6	371.0	370.5
135°	397.0	397.6	398.3	398.9	399.2	399.1	399.0	398.9	398.8	398.4	397.9
137.5°	422.4	422.9	423.5	424.0	424.5	424.7	425.0	425.3	425.6	425.2	424.6
140°	440.1	440.7	441.2	441.7	442.0	442.1	442.3	442.4	442.5	442.4	442.3
142.5°	456.2	456.8	457.3	457.8	458.2	458.4	458.6	458.8	459.0	458.9	458.7
145°	481.0	481.2	481.5	481.6	481.9	482.2	482.6	482.9	483.3	483.1	483.0
147.5°	503.2	503.6	503.9	504.4	504.7	505.1	505.3	505.7	505.9	505.9	505.9
150°	518.3	518.6	518.8	519.0	519.2	519.4	519.6	519.9	520.0	520.0	520.0
152.5°	531.0	531.3	531.6	531.9	532.1	532.3	532.4	532.5	532.6	532.8	533.0
155°	550.5	550.5	550.5	550.5	550.6	550.7	550.8	551.0	551.0	551.5	551.9
157.5°	567.3	567.1	567.1	566.9	566.9	567.0	567.1	567.1	567.2	567.7	568.2
160°	577.8	577.6	577.4	577.1	577.0	577.0	577.0	577.0	577.0	577.6	578.2
162.5°	587.1	586.9	586.5	586.3	586.2	586.3	586.3	586.4	586.5	587.0	587.5
165°	599.3	599.0	598.7	598.3	598.1	598.1	598.1	598.1	598.1	598.8	599.5
167.5°	608.9	608.5	608.0	607.6	607.4	607.5	607.6	607.7	607.8	608.5	609.2
170°	614.4	614.0	613.5	613.1	612.9	612.9	612.9	612.9	612.9	613.6	614.4
172.5°	618.7	618.3	617.9	617.4	617.3	617.3	617.3	617.3	617.3	617.9	618.5
175°	623.3	622.8	622.4	622.0	621.7	621.7	621.7	621.7	621.7	622.4	623.0
177.5°	625.3	624.9	624.5	624.1	624.0	624.0	624.0	624.0	624.0	624.5	625.1
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7	1368.7
2.5°	1443.7	1443.7	1445.6	1452.7	1453.6	1459.7	1457.8
5°	1586.7	1597.8	1602.0	1619.5	1630.0	1634.8	1625.4
7.5°	1761.6	1792.9	1807.8	1826.3	1842.5	1847.4	1834.7
10°	1889.0	1921.8	1949.4	1966.4	1982.2	1992.8	2006.2
12.5°	2012.3	2052.6	2078.8	2102.8	2119.1	2132.4	2134.7
15°	2146.3	2207.3	2253.5	2287.5	2304.5	2313.2	2309.8
17.5°	2281.4	2337.9	2370.8	2405.5	2429.1	2430.3	2430.9
20°	2357.8	2412.9	2451.0	2476.8	2503.1	2502.0	2507.8
22.5°	2408.9	2452.3	2481.5	2500.2	2509.2	2504.7	2505.9
25°	2432.8	2445.7	2440.4	2410.5	2403.0	2375.4	2380.1
27.5°	2309.5	2248.6	2185.6	2104.5	2040.5	1989.3	1991.9
30°	2142.2	2034.4	1911.3	1808.2	1715.6	1689.9	1634.8
32.5°	1908.3	1746.5	1602.4	1506.3	1426.8	1405.3	1357.3
35°	1511.7	1354.7	1206.4	1117.4	1082.2	1033.0	1032.4
37.5°	1175.0	1036.7	958.4	891.6	856.5	826.7	823.8
40°	988.5	880.6	821.5	773.4	738.9	716.6	711.4
42.5°	858.2	770.9	715.6	685.8	659.2	647.7	639.1
45°	700.8	642.2	603.5	576.5	564.3	555.4	550.8
47.5°	586.2	546.9	520.6	502.7	492.7	483.4	485.9
50°	523.8	491.6	472.3	455.3	447.6	441.2	441.8
52.5°	473.6	444.7	429.1	416.8	407.3	402.8	400.5
55°	401.9	383.7	368.0	359.2	353.9	347.5	345.7
57.5°	342.9	328.8	315.9	306.0	304.7	298.5	299.3
60°	303.5	291.8	281.3	276.0	271.9	266.6	268.4
62.5°	271.2	261.3	251.8	247.4	243.3	239.4	240.2
65°	222.1	212.7	206.8	204.5	202.8	201.0	199.2
67.5°	176.9	171.3	167.6	162.6	158.9	158.3	156.5
70°	148.9	141.2	134.7	128.3	126.6	126.0	126.6
72.5°	119.3	114.5	112.7	109.6	109.3	107.7	108.7
75°	89.6	87.9	86.7	84.4	84.4	84.4	84.4
77.5°	66.1	65.0	64.3	63.9	63.3	62.4	62.3
80°	51.6	51.0	49.8	49.8	49.2	49.8	49.2
82.5°	38.9	38.8	37.6	37.6	37.0	36.7	37.0
85°	19.9	19.4	20.5	19.4	19.9	18.8	19.9
87.5°	8.3	8.4	7.9	8.0	7.6	8.5	7.7
90°	13.1	13.5	13.9	14.1	14.3	14.6	14.7
92.5°	19.9	20.2	20.4	20.2	20.1	20.0	19.8
95°	37.6	38.1	38.3	38.3	38.3	38.3	38.3
97.5°	58.4	58.9	59.1	59.1	59.0	59.0	58.9
100°	73.2	73.5	73.8	74.0	74.2	74.4	74.6
102.5°	90.5	90.7	90.9	90.9	90.8	90.8	90.7
105°	115.9	115.9	116.0	116.2	116.4	116.7	116.9
107.5°	144.1	144.5	144.6	144.5	144.4	144.2	144.1
110°	162.9	163.3	163.4	163.2	163.0	162.8	162.6



TEST NUMBER: P332337-935

CATALOG NUMBER: S123RDIP-S1000D585U935-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	181.6	182.1	182.4	182.4	182.3	182.3	182.2
115°	209.6	209.7	209.7	209.6	209.4	209.3	209.2
117.5°	238.0	238.0	237.8	237.5	237.2	236.9	236.6
120°	257.0	256.9	256.8	256.5	256.3	256.1	255.9
122.5°	276.1	275.9	275.5	275.3	274.9	274.7	274.3
125°	304.6	304.2	303.8	303.3	302.9	302.5	302.0
127.5°	332.8	332.2	331.7	331.1	330.6	330.1	329.6
130°	351.8	351.4	350.8	350.0	349.2	348.4	347.7
132.5°	370.0	369.5	368.9	368.3	367.7	367.1	366.5
135°	397.4	397.0	396.7	396.5	396.2	396.1	395.8
137.5°	424.2	423.8	423.4	422.9	422.5	422.1	421.6
140°	442.1	442.0	441.6	440.8	440.1	439.3	438.6
142.5°	458.7	458.6	458.2	457.6	457.0	456.4	455.8
145°	482.9	482.8	482.5	482.1	481.6	481.2	480.8
147.5°	505.9	505.9	505.6	505.0	504.3	503.7	503.0
150°	520.0	520.0	519.8	519.1	518.4	517.8	517.1
152.5°	533.2	533.4	533.1	532.6	532.0	531.5	530.9
155°	552.3	552.8	552.6	551.8	551.0	550.4	549.6
157.5°	568.6	569.0	568.9	568.3	567.7	567.1	566.5
160°	578.7	579.2	579.3	578.9	578.4	578.0	577.6
162.5°	588.1	588.7	588.6	587.9	587.2	586.5	585.8
165°	600.1	600.8	600.7	599.9	599.2	598.5	597.7
167.5°	609.8	610.5	610.5	609.8	609.2	608.5	607.8
170°	615.2	616.0	616.0	615.2	614.4	613.6	612.9
172.5°	619.2	619.9	619.9	619.1	618.4	617.6	616.8
175°	623.7	624.4	624.3	623.5	622.8	622.0	621.2
177.5°	625.6	626.1	626.0	625.4	624.8	624.2	623.6
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2

(END OF REPORT)