

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332929-930

Luminaire Tested: **S124RDIP-S795D365U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332929-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S795D365U930-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3651.3 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

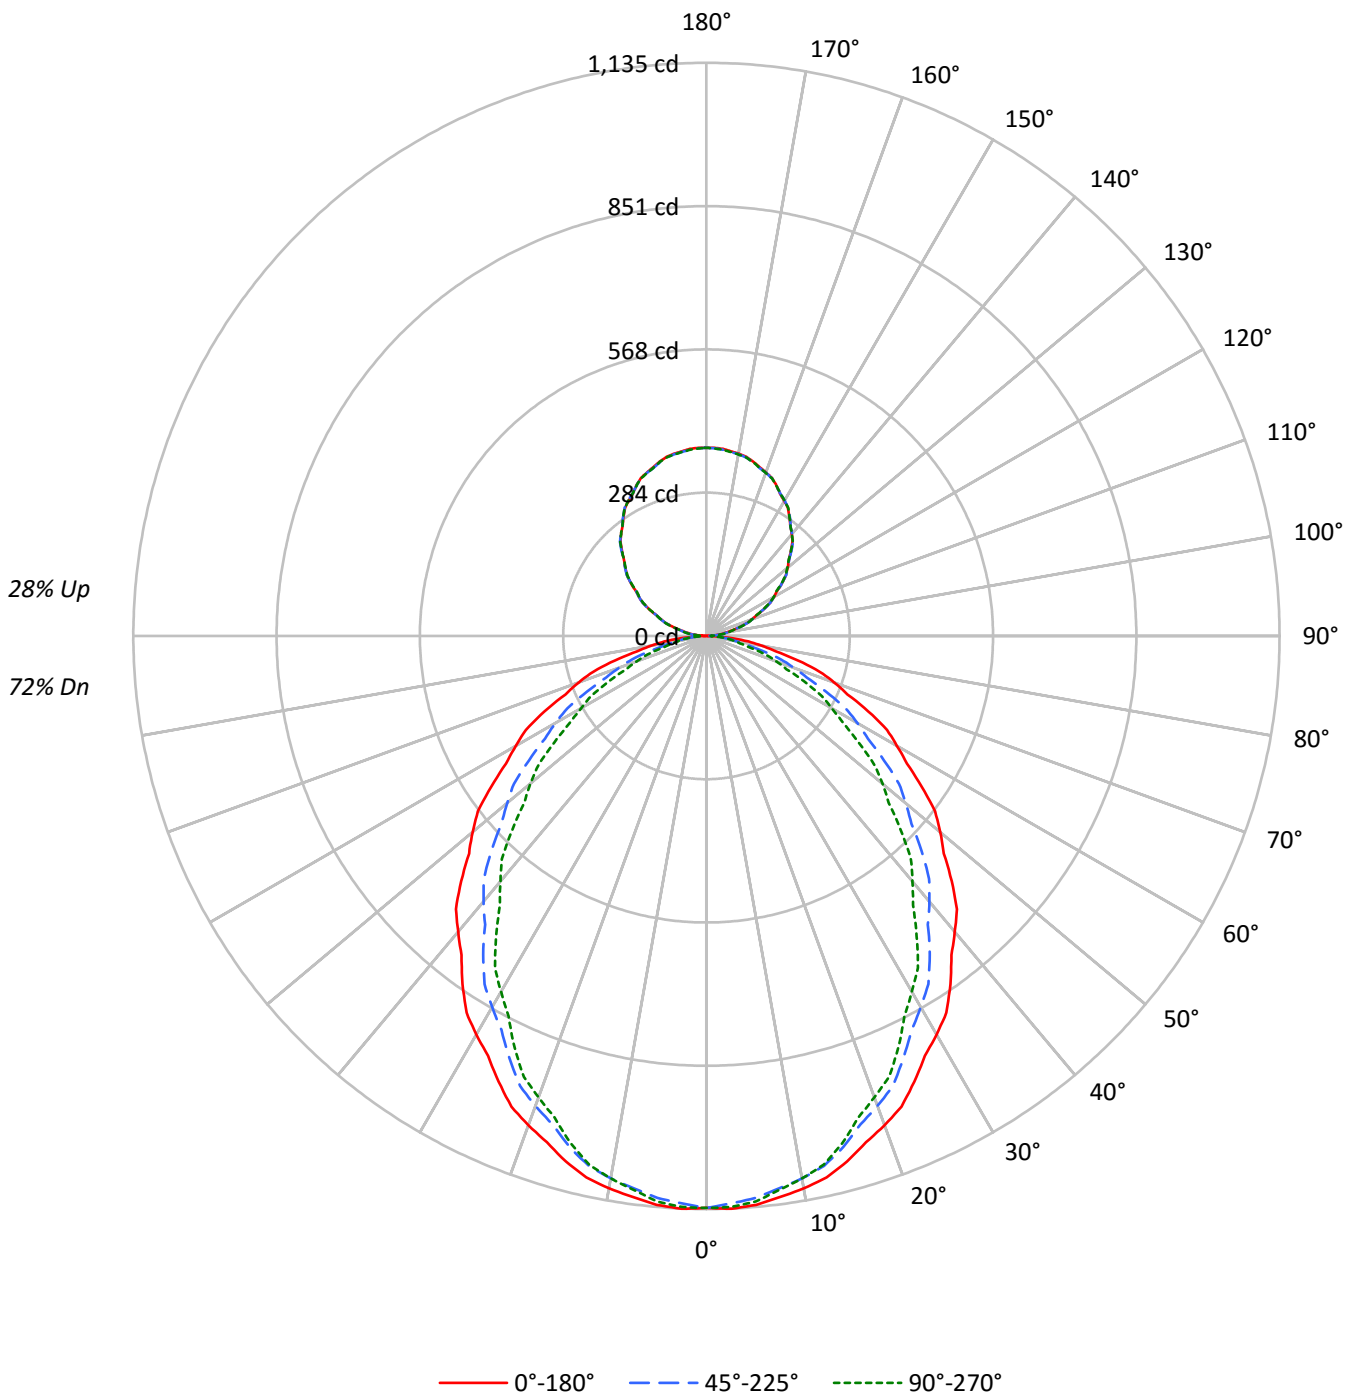



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	72
1	103	99	95	91	98	94	90	87	84	82	79	76	74	72	68	66	65	61
2	94	87	81	75	89	82	77	72	74	70	66	67	64	61	60	58	55	52
3	86	77	69	63	81	73	66	61	66	61	56	60	55	52	54	50	48	44
4	79	68	60	54	75	65	58	52	59	53	48	53	49	45	48	44	41	38
5	73	61	53	47	69	58	51	45	53	47	42	48	43	39	44	39	36	33
6	67	55	47	41	64	53	45	39	48	42	37	44	38	34	40	35	32	30
7	62	50	42	36	59	48	40	35	44	37	33	40	35	31	36	32	29	26
8	58	45	38	32	55	44	36	31	40	34	29	37	31	28	33	29	26	24
9	54	42	34	29	51	40	33	28	37	31	26	34	29	25	31	27	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	24	21	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9143	9143	9143
5°	9164	9052	9108
10°	9107	8943	8943
15°	9002	8756	8690
20°	8858	8508	8352
25°	8675	8219	8011
30°	8496	7914	7582
35°	8298	7597	7154
40°	8061	7238	6690
45°	7841	6882	6218
50°	7592	6469	5718
55°	7323	6042	5175
60°	7030	5572	4621
65°	6758	4988	4076
70°	6366	4338	3460
75°	5870	3599	2813
80°	5119	2738	2580
85°	4335	2492	2325



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.4	2.9
10°-20°	296.7	8.1
20°-30°	428.4	11.7
30°-40°	485.6	13.3
40°-50°	468.9	12.8
50°-60°	389.9	10.7
60°-70°	269.3	7.4
70°-80°	136.5	3.7
80°-90°	36.1	1.0
90°-100°	24.6	0.7
100°-110°	72.8	2.0
110°-120°	123.5	3.4
120°-130°	162.9	4.5
130°-140°	182.9	5.0
140°-150°	179.8	4.9
150°-160°	151.2	4.1
160°-170°	100.6	2.8
170°-180°	35.2	1.0
0°-30°	831.5	22.8
0°-40°	1317.1	36.1
0°-60°	2176.0	59.6
0°-90°	2617.8	71.7
90°-120°	220.9	6.0
90°-150°	746.5	20.4
90°-180°	1034.0	28.3
0°-180°	3651.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1133	1133	1133	1133	1133	
5°	1131	1127	1117	1125	1124	107
15°	1077	1069	1048	1046	1040	303
25°	974	957	923	908	899	449
35°	842	813	771	742	726	526
45°	687	654	603	562	545	529
55°	520	484	429	386	368	465
65°	354	316	261	225	213	349
75°	188	156	115	96	90	199
85°	47	30	27	25	25	53
90°	1	4	6	8	9	3
95°	17	20	22	23	23	19
105°	67	67	69	69	70	71
115°	126	126	125	125	124	124
125°	183	183	183	182	182	163
135°	236	238	238	237	236	182
145°	287	288	288	288	287	179
155°	328	328	328	329	328	151
165°	358	357	356	358	357	101
175°	372	371	370	372	370	35
180°	372	372	372	372	372	



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6
2.5°	1135.4	1134.7	1134.1	1133.5	1132.9	1131.7	1130.0	1128.4	1126.7	1124.9	1126.7
5°	1130.8	1130.1	1129.3	1128.5	1127.7	1126.3	1123.9	1121.6	1119.2	1117.0	1118.9
7.5°	1120.6	1119.8	1119.0	1118.2	1117.4	1115.5	1112.5	1109.5	1106.4	1103.4	1104.6
10°	1110.9	1109.9	1109.0	1108.0	1107.0	1104.8	1101.4	1097.9	1094.5	1091.0	1091.7
12.5°	1098.4	1097.3	1096.2	1095.0	1094.0	1091.4	1087.3	1083.1	1079.0	1075.0	1075.5
15°	1077.1	1075.4	1073.6	1071.9	1070.2	1066.9	1062.0	1057.2	1052.4	1047.6	1047.2
17.5°	1051.2	1048.7	1046.2	1043.7	1041.2	1037.1	1031.3	1025.5	1019.7	1013.9	1012.8
20°	1031.1	1028.6	1026.1	1023.6	1021.1	1016.6	1010.0	1003.5	996.9	990.3	988.8
22.5°	1008.9	1006.1	1003.3	1000.5	997.7	992.7	985.7	978.7	971.7	964.7	962.4
25°	973.9	970.4	966.9	963.4	960.0	954.3	946.4	938.5	930.6	922.7	919.4
27.5°	937.1	932.8	928.4	924.1	919.7	913.3	904.8	896.4	887.9	879.5	875.5
30°	911.4	906.6	901.8	897.0	892.2	885.3	876.2	867.2	858.0	849.0	844.2
32.5°	884.4	879.0	873.5	868.0	862.7	855.2	845.9	836.5	827.1	817.7	812.2
35°	842.0	835.9	829.7	823.5	817.4	809.5	799.9	790.2	780.6	770.9	764.4
37.5°	796.8	790.4	784.1	777.7	771.4	762.9	752.2	741.5	730.8	720.2	712.8
40°	764.9	758.6	752.2	745.8	739.5	730.8	719.7	708.8	697.8	686.8	678.7
42.5°	734.3	727.7	721.1	714.4	707.7	698.6	687.2	675.7	664.3	652.8	644.6
45°	686.8	679.7	672.5	665.4	658.3	649.0	637.4	625.8	614.2	602.8	593.3
47.5°	637.7	630.4	623.1	615.6	608.3	598.6	586.6	574.5	562.6	550.5	540.7
50°	604.5	597.0	589.4	581.9	574.4	564.4	552.1	539.8	527.4	515.1	505.5
52.5°	570.5	563.1	555.7	548.4	541.0	531.0	518.4	505.7	493.1	480.5	470.7
55°	520.3	512.6	504.9	497.2	489.5	479.4	466.8	454.3	441.8	429.3	419.2
57.5°	470.8	462.7	454.7	446.7	438.6	428.4	416.1	403.8	391.5	379.1	369.0
60°	435.4	427.6	420.0	412.2	404.5	394.5	382.1	369.8	357.5	345.1	335.1
62.5°	403.4	395.4	387.4	379.4	371.4	361.0	348.4	335.7	323.1	310.5	301.2
65°	353.8	345.5	337.2	329.0	320.7	310.4	298.0	285.7	273.4	261.1	252.7
67.5°	302.3	294.4	286.4	278.5	270.5	260.9	249.4	238.0	226.5	215.1	207.9
70°	269.7	261.6	253.5	245.4	237.3	227.8	216.8	205.8	194.9	183.8	177.5
72.5°	235.1	227.7	220.4	213.0	205.7	196.9	186.5	176.1	165.8	155.4	149.9
75°	188.2	181.1	173.9	166.8	159.6	151.6	142.5	133.5	124.4	115.4	110.9
77.5°	140.6	134.6	128.6	122.5	116.4	109.7	102.5	95.1	87.8	80.5	77.9
80°	110.1	104.5	99.0	93.4	87.8	82.1	76.3	70.5	64.7	58.9	58.4
82.5°	83.8	78.7	73.5	68.4	63.3	59.0	55.8	52.4	49.1	45.8	45.3
85°	46.8	43.0	39.1	35.3	31.4	29.2	28.6	28.0	27.5	26.9	26.5
87.5°	16.1	15.0	13.9	12.9	11.7	11.2	11.2	11.1	11.0	11.0	10.9
90°	0.9	1.5	2.3	3.0	3.7	4.3	4.8	5.3	5.8	6.4	6.7
92.5°	6.2	7.0	7.7	8.6	9.4	9.9	10.4	10.7	11.1	11.4	11.7
95°	17.3	17.9	18.4	19.0	19.6	20.1	20.5	21.0	21.4	21.9	22.1
97.5°	30.2	30.7	31.1	31.6	32.0	32.5	33.0	33.6	34.1	34.7	34.9
100°	40.4	40.6	40.8	41.1	41.3	41.7	42.3	43.0	43.5	44.1	44.2
102.5°	51.0	51.0	51.1	51.3	51.4	51.7	52.2	52.7	53.2	53.7	54.0
105°	67.1	67.2	67.3	67.3	67.3	67.5	67.8	68.1	68.3	68.6	68.7
107.5°	84.1	84.2	84.3	84.4	84.5	84.5	84.5	84.5	84.6	84.6	84.8
110°	95.6	95.8	95.9	96.0	96.1	96.2	96.1	96.0	96.0	96.0	95.8



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	107.6	107.6	107.7	107.7	107.7	107.7	107.5	107.5	107.4	107.2	107.2
115°	125.6	125.6	125.6	125.6	125.6	125.6	125.4	125.3	125.1	125.1	125.0
117.5°	142.5	142.6	142.7	142.7	142.8	142.8	142.7	142.6	142.4	142.4	142.2
120°	153.8	154.1	154.3	154.6	154.9	154.9	154.7	154.5	154.3	154.2	153.8
122.5°	165.6	165.7	165.8	165.9	166.0	166.0	165.9	165.8	165.8	165.7	165.4
125°	183.0	183.0	183.0	183.0	183.0	182.9	182.9	182.8	182.7	182.6	182.5
127.5°	198.7	198.9	199.1	199.3	199.4	199.5	199.4	199.3	199.2	199.1	198.9
130°	209.8	209.9	210.1	210.3	210.5	210.6	210.6	210.6	210.6	210.6	210.5
132.5°	221.0	221.2	221.3	221.4	221.6	221.6	221.6	221.5	221.5	221.4	221.3
135°	235.9	236.4	236.7	237.1	237.5	237.7	237.7	237.7	237.7	237.7	237.6
137.5°	252.2	252.4	252.6	252.7	252.9	253.1	253.2	253.2	253.4	253.5	253.3
140°	263.0	263.2	263.3	263.4	263.6	263.6	263.6	263.6	263.6	263.6	263.6
142.5°	273.0	273.0	273.2	273.3	273.5	273.5	273.5	273.4	273.4	273.3	273.3
145°	286.7	286.9	287.1	287.4	287.7	287.9	287.9	288.0	288.0	288.1	288.0
147.5°	300.3	300.6	300.8	301.2	301.5	301.6	301.6	301.5	301.5	301.4	301.3
150°	308.6	308.8	309.1	309.3	309.6	309.7	309.7	309.7	309.7	309.7	309.7
152.5°	316.4	316.6	316.7	316.8	317.0	317.1	317.2	317.2	317.2	317.3	317.5
155°	328.4	328.4	328.4	328.4	328.4	328.4	328.3	328.2	328.2	328.2	328.4
157.5°	338.6	338.4	338.3	338.3	338.1	338.0	338.0	338.0	338.0	338.0	338.2
160°	344.5	344.5	344.5	344.4	344.3	344.2	344.2	344.1	344.1	344.0	344.2
162.5°	350.1	349.9	349.8	349.6	349.4	349.4	349.3	349.2	349.1	349.0	349.4
165°	357.5	357.3	357.2	356.9	356.8	356.6	356.4	356.4	356.2	356.1	356.4
167.5°	363.2	363.0	362.7	362.4	362.2	362.0	362.1	362.1	362.1	362.1	362.5
170°	366.5	366.2	365.8	365.5	365.2	365.1	365.1	365.2	365.3	365.3	365.7
172.5°	368.8	368.5	368.2	367.9	367.7	367.5	367.5	367.6	367.6	367.6	368.0
175°	371.9	371.6	371.3	371.0	370.6	370.5	370.4	370.3	370.3	370.2	370.6
177.5°	373.0	372.8	372.4	372.2	371.9	371.9	371.9	371.9	371.9	371.9	372.2
180°	372.5	372.5	372.5	372.5	372.5	372.5	372.5	372.5	372.5	372.5	372.5



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6
2.5°	1128.4	1130.0	1131.7	1132.5	1132.4	1132.2	1132.0	1131.9
5°	1120.8	1122.7	1124.7	1125.4	1125.0	1124.7	1124.3	1123.9
7.5°	1105.9	1107.2	1108.4	1108.6	1108.1	1107.4	1106.9	1106.2
10°	1092.5	1093.2	1094.1	1094.1	1093.2	1092.5	1091.7	1091.0
12.5°	1076.0	1076.4	1076.8	1076.5	1075.5	1074.4	1073.3	1072.2
15°	1046.8	1046.4	1046.0	1045.2	1043.8	1042.4	1041.1	1039.8
17.5°	1011.8	1010.7	1009.6	1008.0	1006.0	1004.0	1001.9	999.9
20°	987.2	985.7	984.1	982.2	979.7	977.1	974.6	972.2
22.5°	960.1	957.7	955.4	953.2	951.2	949.2	947.1	945.1
25°	916.2	912.9	909.6	907.0	905.1	903.2	901.2	899.3
27.5°	871.4	867.4	863.3	859.9	857.1	854.4	851.6	848.8
30°	839.4	834.5	829.7	825.7	822.7	819.6	816.5	813.4
32.5°	806.6	801.0	795.4	791.2	788.2	785.3	782.4	779.4
35°	757.8	751.3	744.8	739.7	736.3	732.8	729.3	725.9
37.5°	705.5	698.1	690.8	685.4	682.0	678.5	675.1	671.6
40°	670.7	662.5	654.4	648.7	645.2	641.7	638.3	634.8
42.5°	636.3	628.1	619.9	613.9	610.3	606.7	603.1	599.4
45°	583.8	574.4	564.9	558.5	555.0	551.5	548.0	544.6
47.5°	530.9	521.1	511.4	504.5	500.8	496.9	493.1	489.3
50°	495.9	486.2	476.5	469.9	466.3	462.6	458.9	455.3
52.5°	460.9	451.1	441.2	434.5	430.6	426.8	423.1	419.2
55°	409.2	399.2	389.2	382.4	378.7	375.0	371.4	367.7
57.5°	358.8	348.6	338.4	332.0	329.2	326.4	323.7	320.9
60°	325.1	315.1	305.1	298.5	295.5	292.4	289.3	286.2
62.5°	292.0	282.7	273.5	267.6	265.1	262.7	260.2	257.7
65°	244.4	236.2	227.9	222.6	220.3	217.9	215.6	213.4
67.5°	200.8	193.7	186.5	181.7	179.2	176.6	174.1	171.5
70°	171.1	164.8	158.4	154.3	152.4	150.4	148.5	146.6
72.5°	144.6	139.1	133.6	130.0	128.3	126.5	124.7	122.9
75°	106.5	102.1	97.6	94.8	93.7	92.5	91.3	90.2
77.5°	75.3	72.7	70.1	68.6	68.3	68.0	67.7	67.3
80°	57.8	57.2	56.7	56.3	56.1	55.8	55.7	55.5
82.5°	44.9	44.5	44.1	43.8	43.6	43.4	43.2	43.0
85°	26.1	25.8	25.4	25.1	25.1	25.1	25.1	25.1
87.5°	10.8	10.8	10.7	10.8	10.9	11.1	11.3	11.4
90°	7.1	7.5	7.9	8.2	8.2	8.4	8.5	8.6
92.5°	11.9	12.1	12.3	12.5	12.6	12.6	12.7	12.8
95°	22.3	22.5	22.7	22.7	22.7	22.7	22.7	22.7
97.5°	35.1	35.3	35.5	35.6	35.6	35.6	35.6	35.6
100°	44.4	44.4	44.6	44.7	44.7	44.7	44.7	44.7
102.5°	54.1	54.3	54.5	54.6	54.6	54.7	54.7	54.8
105°	69.0	69.1	69.3	69.5	69.7	70.0	70.1	70.3
107.5°	85.0	85.2	85.4	85.4	85.4	85.4	85.4	85.4
110°	95.7	95.6	95.4	95.5	95.6	95.9	96.0	96.2



TEST NUMBER: P332929-930

CATALOG NUMBER: S124RDIP-S795D365U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	107.2	107.1	107.1	107.1	107.2	107.2	107.2	107.3
115°	124.9	124.8	124.7	124.7	124.7	124.6	124.5	124.5
117.5°	141.9	141.7	141.5	141.4	141.2	141.0	141.0	140.8
120°	153.5	153.2	152.9	152.8	152.9	153.0	153.1	153.3
122.5°	165.3	165.0	164.8	164.5	164.4	164.1	163.9	163.6
125°	182.4	182.3	182.1	182.0	181.9	181.7	181.6	181.5
127.5°	198.9	198.7	198.5	198.4	198.4	198.3	198.1	198.0
130°	210.3	210.2	210.1	209.9	209.6	209.4	209.1	208.9
132.5°	221.2	221.0	220.9	220.8	220.7	220.6	220.5	220.4
135°	237.4	237.3	237.2	237.0	236.8	236.6	236.4	236.3
137.5°	253.2	253.0	252.8	252.7	252.7	252.8	252.8	252.9
140°	263.5	263.4	263.3	263.3	263.3	263.2	263.1	263.0
142.5°	273.3	273.3	273.2	273.2	273.2	273.2	273.2	273.2
145°	288.0	287.9	287.9	287.7	287.6	287.3	287.1	287.0
147.5°	301.3	301.3	301.2	301.2	301.1	301.0	300.9	300.9
150°	309.7	309.7	309.7	309.7	309.7	309.6	309.5	309.4
152.5°	317.6	317.8	318.0	317.9	317.7	317.6	317.4	317.2
155°	328.6	328.9	329.1	329.1	328.9	328.6	328.4	328.2
157.5°	338.3	338.6	338.8	338.8	338.5	338.3	338.1	337.9
160°	344.4	344.5	344.8	344.7	344.4	344.1	343.7	343.4
162.5°	349.8	350.1	350.4	350.4	350.2	349.8	349.5	349.2
165°	356.9	357.3	357.6	357.7	357.4	357.2	356.9	356.7
167.5°	362.9	363.2	363.6	363.6	363.2	362.8	362.4	362.0
170°	366.1	366.5	366.9	366.8	366.4	365.9	365.5	365.0
172.5°	368.5	368.9	369.3	369.3	368.9	368.4	368.0	367.5
175°	371.1	371.5	372.0	372.0	371.5	371.1	370.6	370.2
177.5°	372.5	372.9	373.2	373.2	372.8	372.4	372.0	371.6
180°	372.5	372.5	372.5	372.5	372.5	372.5	372.5	372.5

(END OF REPORT)