

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904899

Luminaire Tested: DFN2DIP-4P2F0-040D040US835-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904899
REPORT IS A COMBINATION OF REPORTS P900547 AND P897455
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P2F0-040D040US835-FLLONL
Description: 2 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7920.0 lumens
Efficiency: N/A
Efficacy: 108.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.07' x L: 2.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 73.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904899
CATALOG NUMBER: DFN2DIP-4P2F0-040D040US835-FLLONL

Luminous Intensity Polar Plot

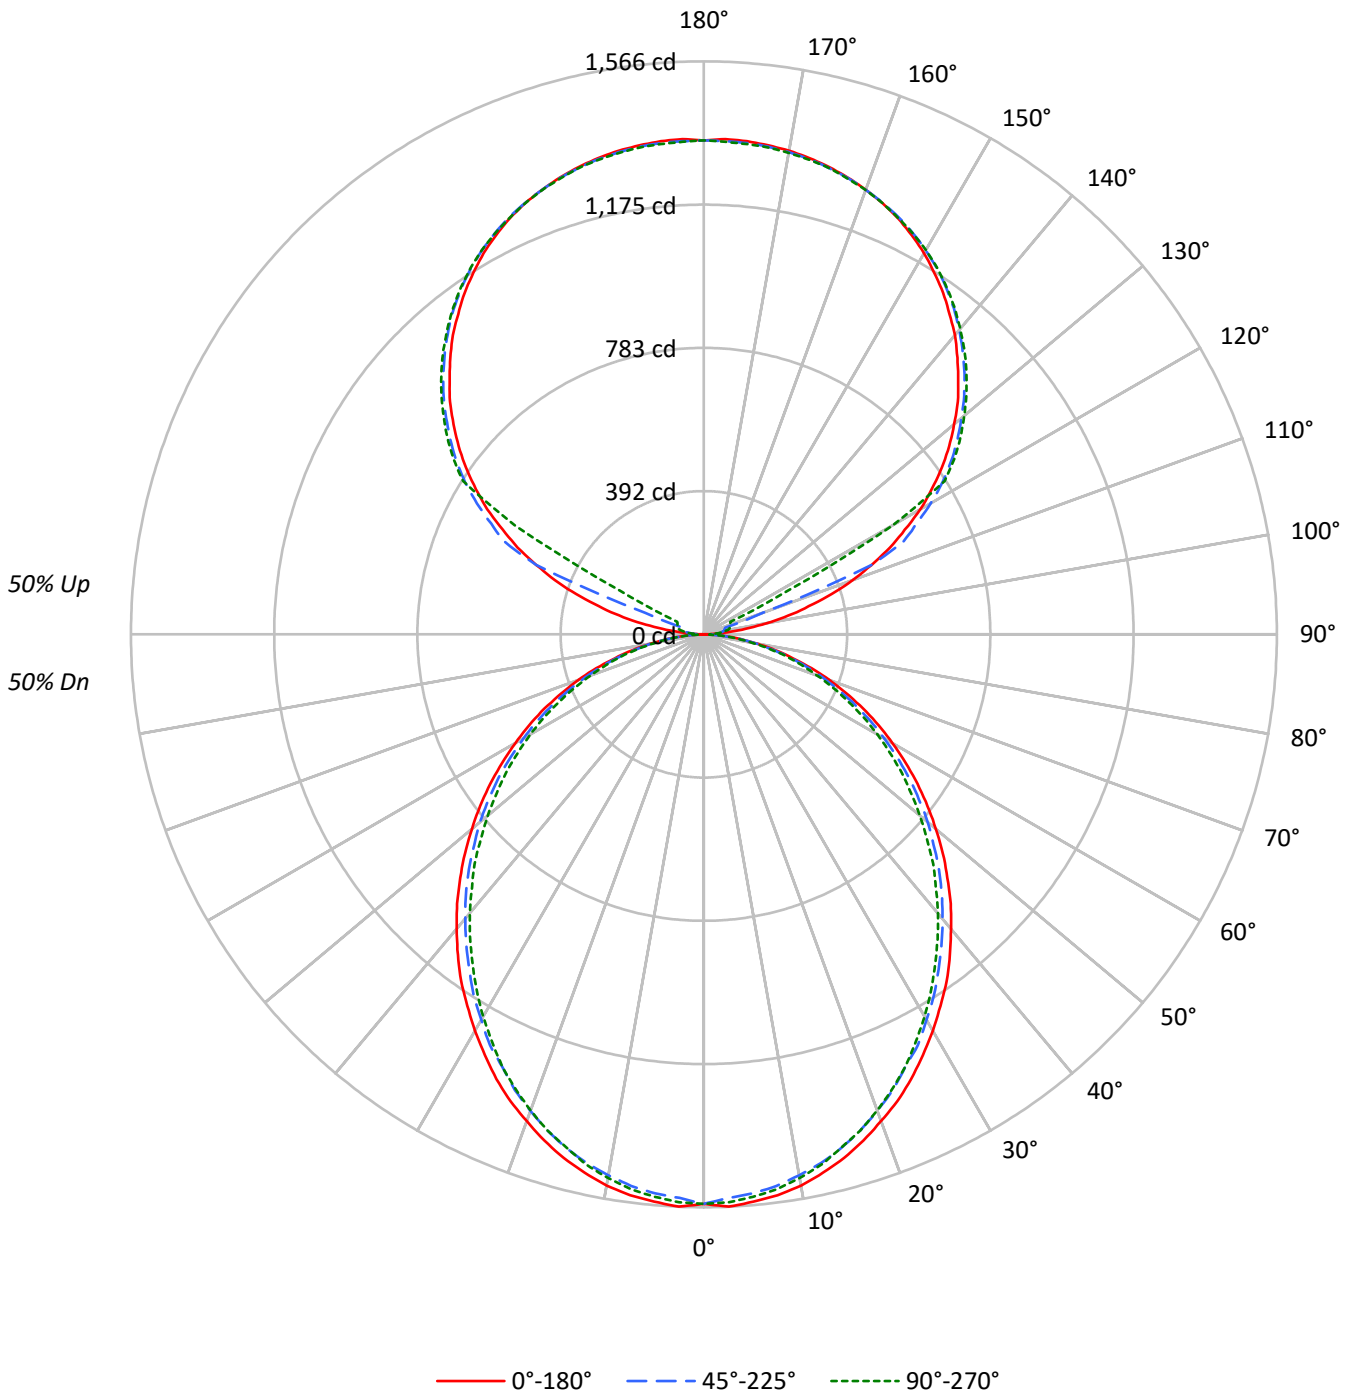



TEST NUMBER: P904899
 CATALOG NUMBER: DFN2DIP-4P2F0-040D040US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	56	56	56	50
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47	50	48	47	42
2	89	82	75	70	82	76	70	66	64	60	57	53	51	48	44	42	40	44	42	40	35
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34	39	36	34	30
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29	35	32	29	26
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	26	31	28	26	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	27	28	25	23	28	25	23	20
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	23	20	26	23	20	17
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18	24	20	18	16
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3897	3897	3897
5°	3896	3833	3862
10°	3856	3772	3803
15°	3792	3700	3716
20°	3707	3604	3626
25°	3623	3491	3522
30°	3520	3385	3393
35°	3421	3262	3257
40°	3301	3137	3127
45°	3180	3011	2993
50°	3049	2879	2839
55°	2910	2727	2696
60°	2753	2548	2532
65°	2580	2360	2339
70°	2361	2131	2129
75°	2061	1858	1927
80°	1695	1509	1559
85°	1135	943	970

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3180 cd/sqm



TEST NUMBER: P904899

CATALOG NUMBER: DFN2DIP-4P2F0-040D040US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	1.8
10°-20°	412.2	5.2
20°-30°	605.7	7.6
30°-40°	703.5	8.9
40°-50°	702.6	8.9
50°-60°	612.7	7.7
60°-70°	452.9	5.7
70°-80°	256.2	3.2
80°-90°	70.0	0.9
90°-100°	44.5	0.6
100°-110°	165.9	2.1
110°-120°	440.1	5.6
120°-130°	729.9	9.2
130°-140°	775.4	9.8
140°-150°	720.6	9.1
150°-160°	579.4	7.3
160°-170°	373.3	4.7
170°-180°	128.5	1.6
0°-30°	1164.4	14.7
0°-40°	1867.9	23.6
0°-60°	3183.2	40.2
0°-90°	3962.4	50.0
90°-120°	650.5	8.2
90°-150°	2876.4	36.3
90°-180°	3958.0	50.0
0°-180°	7920.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	1	12	20	24	26	7
95°	63	31	38	43	42	75
105°	297	326	60	70	74	317
115°	562	578	603	150	80	553
125°	794	807	825	832	835	708
135°	983	998	1007	1017	1015	759
145°	1140	1139	1156	1162	1158	713
155°	1255	1246	1258	1264	1256	578
165°	1323	1317	1320	1326	1320	374
175°	1353	1346	1348	1355	1345	129
180°	1350	1350	1350	1350	1350	



TEST NUMBER: P904899

CATALOG NUMBER: DFN2DIP-4P2F0-040D040US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	0.9	11.7	19.5	24.5	26.3
92.5°	24.5	20.5	23.4	25.4	26.3
95°	63.4	31.2	38.0	43.0	42.0
97.5°	114.3	34.2	49.8	52.8	53.7
100°	172.9	39.1	55.7	63.4	65.4
102.5°	237.3	235.5	57.6	68.3	71.3
105°	296.9	326.3	59.6	70.3	74.2
107.5°	366.3	390.7	61.6	72.3	76.2
110°	432.8	453.2	171.0	73.3	77.1



TEST NUMBER: P904899

CATALOG NUMBER: DFN2DIP-4P2F0-040D040US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	495.3	512.8	496.2	75.2	78.2
115°	561.6	578.2	602.7	150.4	80.2
117.5°	619.3	638.8	655.5	515.7	259.8
120°	683.8	698.4	716.0	727.8	595.9
122.5°	738.4	754.1	773.7	779.5	780.5
125°	794.1	806.9	825.4	832.3	835.2
127.5°	844.9	858.6	873.3	883.1	884.0
130°	892.8	908.5	919.1	929.9	929.0
132.5°	941.6	954.4	965.1	973.9	973.0
135°	982.7	998.4	1007.1	1016.9	1015.0
137.5°	1025.6	1037.3	1047.2	1056.9	1054.0
140°	1067.6	1075.5	1086.2	1095.0	1090.1
142.5°	1102.9	1109.7	1122.4	1130.1	1125.3
145°	1140.0	1139.0	1155.5	1162.4	1157.5
147.5°	1172.1	1169.2	1185.8	1190.7	1186.9
150°	1203.4	1196.6	1212.3	1218.1	1213.2
152.5°	1229.8	1222.0	1236.6	1242.5	1235.7
155°	1255.2	1246.5	1258.2	1264.0	1256.2
157.5°	1275.7	1267.9	1276.8	1283.6	1275.7
160°	1293.3	1287.4	1293.3	1299.1	1292.3
162.5°	1308.9	1303.1	1308.0	1314.8	1306.0
165°	1322.6	1316.8	1319.7	1326.5	1319.7
167.5°	1333.4	1327.4	1330.5	1337.3	1328.5
170°	1342.2	1336.3	1338.2	1345.1	1336.3
172.5°	1348.0	1342.2	1344.2	1351.0	1342.2
175°	1352.8	1346.0	1348.0	1354.8	1345.1
177.5°	1354.8	1348.0	1349.0	1355.9	1347.1
180°	1350.0	1350.0	1350.0	1350.0	1350.0



TEST NUMBER: P904899
 CATALOG NUMBER: DFN2DIP-4P2F0-040D040US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.87	12.73	12.82	13.70	14.97	11.42	12.28	12.38	13.26	14.53
	3H	13.50	14.28	14.47	15.26	16.55	13.01	13.79	13.98	14.77	16.06
	4H	14.08	14.81	15.06	15.79	17.10	13.58	14.31	14.56	15.30	16.60
	6H	14.46	15.13	15.45	16.12	17.44	13.96	14.63	14.95	15.62	16.94
	8H	14.55	15.20	15.55	16.20	17.51	14.05	14.70	15.05	15.70	17.01
	12H	14.60	15.21	15.60	16.21	17.54	14.09	14.70	15.09	15.70	17.03
4H	2H	12.32	13.05	13.30	14.03	15.33	11.96	12.69	12.95	13.68	14.98
	3H	14.15	14.76	15.15	15.78	17.09	13.75	14.36	14.74	15.37	16.69
	4H	14.85	15.41	15.86	16.42	17.75	14.43	14.98	15.43	15.99	17.33
	6H	15.34	15.82	16.36	16.86	18.19	14.91	15.39	15.93	16.42	17.76
	8H	15.48	15.93	16.50	16.96	18.31	15.05	15.49	16.06	16.52	17.87
	12H	15.54	15.95	16.58	16.99	18.35	15.10	15.50	16.13	16.54	17.90
8H	4H	15.03	15.48	16.05	16.51	17.86	14.66	15.10	15.67	16.13	17.48
	6H	15.64	16.01	16.68	17.07	18.42	15.25	15.62	16.29	16.69	18.04
	8H	15.84	16.17	16.89	17.22	18.59	15.45	15.78	16.50	16.83	18.19
	12H	15.96	16.25	17.01	17.29	18.70	15.55	15.84	16.60	16.88	18.29
12H	4H	15.02	15.42	16.05	16.46	17.82	14.65	15.05	15.68	16.09	17.45
	6H	15.66	15.99	16.71	17.04	18.41	15.29	15.62	16.34	16.67	18.03
	8H	15.89	16.17	16.94	17.22	18.63	15.50	15.79	16.56	16.84	18.25