

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910647

Luminaire Tested: DFN2DIP-HX2F0-040D030US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910647
REPORT IS A COMBINATION OF REPORTS P900685 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-040D030US850-FLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7685.4 lumens
Efficiency: N/A
Efficacy: 133.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910647
CATALOG NUMBER: DFN2DIP-HX2F0-040D030US850-FLLONL

Luminous Intensity Polar Plot

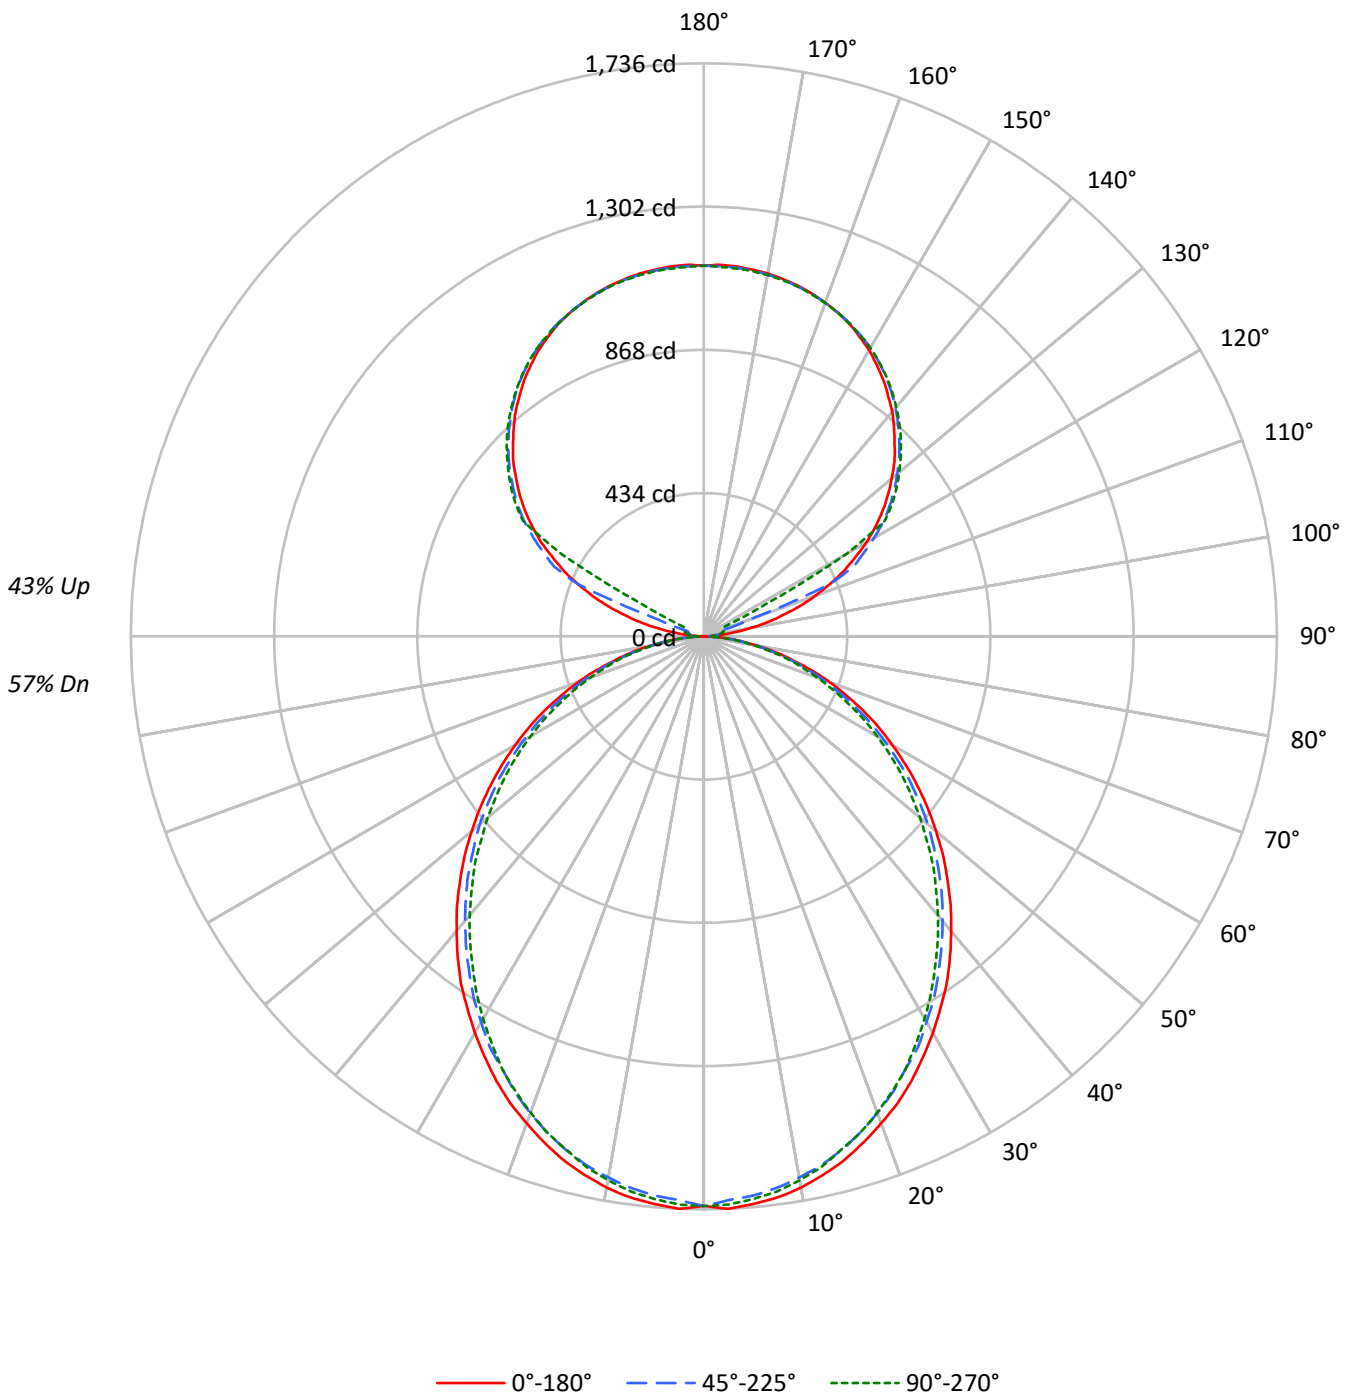



TEST NUMBER: P910647

CATALOG NUMBER: DFN2DIP-HX2F0-040D030US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	63	63	63	57	57	57
1	99	95	91	88	92	89	85	82	77	74	72	66	64	62	55	54	53	48	48	48
2	91	83	77	72	84	77	72	67	67	63	59	58	55	52	49	47	45	40	40	40
3	83	73	66	60	77	68	62	56	59	54	50	51	47	44	43	40	38	34	34	34
4	76	65	57	50	70	61	53	48	53	47	43	45	41	38	39	35	33	29	29	29
5	69	58	49	43	64	54	47	41	47	41	37	41	36	33	35	31	29	26	26	26
6	64	52	44	38	59	49	41	36	43	37	32	37	32	29	32	28	25	22	22	22
7	59	47	39	33	55	44	37	31	39	33	28	34	29	25	29	25	22	20	20	20
8	55	43	35	29	51	40	33	28	35	29	25	31	26	23	27	23	20	18	18	18
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	25	21	18	16	16	16
10	48	36	28	24	45	34	27	22	30	24	20	26	22	18	23	19	17	15	15	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4067	4067	4067
5°	4067	4000	4030
10°	4027	3937	3967
15°	3962	3862	3875
20°	3875	3763	3781
25°	3789	3646	3672
30°	3683	3536	3537
35°	3581	3408	3394
40°	3458	3278	3258
45°	3334	3148	3117
50°	3198	3011	2956
55°	3056	2853	2806
60°	2894	2666	2633
65°	2717	2471	2431
70°	2492	2234	2211
75°	2183	1950	1998
80°	1806	1586	1612
85°	1227	996	997

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3334 cd/sqm



TEST NUMBER: P910647

CATALOG NUMBER: DFN2DIP-HX2F0-040D030US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	2.1
10°-20°	457.1	5.9
20°-30°	671.7	8.7
30°-40°	780.2	10.2
40°-50°	779.2	10.1
50°-60°	679.5	8.8
60°-70°	502.3	6.5
70°-80°	284.2	3.7
80°-90°	77.0	1.0
90°-100°	37.0	0.5
100°-110°	138.0	1.8
110°-120°	366.1	4.8
120°-130°	607.1	7.9
130°-140°	644.9	8.4
140°-150°	599.4	7.8
150°-160°	481.9	6.3
160°-170°	310.5	4.0
170°-180°	106.9	1.4
0°-30°	1291.3	16.8
0°-40°	2071.5	27.0
0°-60°	3530.2	45.9
0°-90°	4393.6	57.2
90°-120°	541.1	7.0
90°-150°	2392.5	31.1
90°-180°	3292.0	42.8
0°-180°	7685.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	1	10	16	20	22	7
95°	53	26	32	36	35	63
105°	247	271	50	58	62	264
115°	467	481	501	125	67	460
125°	660	671	687	692	695	589
135°	817	830	838	846	844	631
145°	948	947	961	967	963	593
155°	1044	1037	1046	1051	1045	481
165°	1100	1095	1098	1103	1098	311
175°	1125	1120	1121	1127	1119	107
180°	1123	1123	1123	1123	1123	



TEST NUMBER: P910647

CATALOG NUMBER: DFN2DIP-HX2F0-040D030US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	0.8	9.8	16.2	20.4	21.8
92.5°	20.4	17.1	19.5	21.2	21.8
95°	52.8	26.0	31.6	35.8	34.9
97.5°	95.0	28.5	41.4	43.9	44.7
100°	143.8	32.5	46.4	52.8	54.5
102.5°	197.4	195.8	47.9	56.8	59.3
105°	247.0	271.4	49.6	58.4	61.8
107.5°	304.6	324.9	51.2	60.1	63.4
110°	360.0	376.9	142.2	61.0	64.2



TEST NUMBER: P910647

CATALOG NUMBER: DFN2DIP-HX2F0-040D030US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	412.0	426.5	412.8	62.5	65.0
115°	467.1	481.0	501.3	125.1	66.7
117.5°	515.1	531.3	545.2	429.0	216.1
120°	568.7	580.9	595.5	605.3	495.6
122.5°	614.2	627.3	643.6	648.3	649.2
125°	660.5	671.1	686.6	692.2	694.7
127.5°	702.8	714.1	726.4	734.5	735.3
130°	742.6	755.7	764.5	773.4	772.8
132.5°	783.2	793.8	802.7	810.0	809.2
135°	817.3	830.4	837.6	845.8	844.2
137.5°	853.0	862.8	871.0	879.1	876.7
140°	888.0	894.5	903.4	910.7	906.7
142.5°	917.4	923.0	933.6	940.0	936.0
145°	948.2	947.3	961.2	966.8	962.7
147.5°	974.9	972.5	986.3	990.3	987.1
150°	1001.0	995.3	1008.3	1013.1	1009.1
152.5°	1022.8	1016.4	1028.6	1033.5	1027.8
155°	1044.0	1036.8	1046.5	1051.3	1044.9
157.5°	1061.1	1054.7	1062.0	1067.6	1061.1
160°	1075.7	1070.9	1075.7	1080.6	1074.8
162.5°	1088.7	1083.8	1087.9	1093.6	1086.3
165°	1100.0	1095.2	1097.7	1103.3	1097.7
167.5°	1109.0	1104.1	1106.6	1112.3	1105.0
170°	1116.3	1111.4	1113.1	1118.8	1111.4
172.5°	1121.2	1116.3	1118.0	1123.6	1116.3
175°	1125.2	1119.5	1121.2	1126.9	1118.8
177.5°	1126.9	1121.2	1122.1	1127.7	1120.4
180°	1122.9	1122.9	1122.9	1122.9	1122.9



TEST NUMBER: P910647
 CATALOG NUMBER: DFN2DIP-HX2F0-040D030US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.65	13.58	13.54	14.49	15.65	12.22	13.15	13.12	14.07	15.23
	3H	14.29	15.12	15.19	16.04	17.23	13.83	14.66	14.73	15.58	16.77
	4H	14.86	15.65	15.78	16.58	17.78	14.40	15.19	15.32	16.12	17.32
	6H	15.24	15.97	16.18	16.91	18.12	14.79	15.51	15.72	16.45	17.66
	8H	15.34	16.03	16.28	16.99	18.20	14.88	15.58	15.82	16.53	17.74
	12H	15.38	16.04	16.33	16.99	18.22	14.92	15.58	15.87	16.53	17.76
4H	2H	13.11	13.90	14.03	14.82	16.02	12.77	13.56	13.69	14.48	15.68
	3H	14.95	15.61	15.89	16.57	17.78	14.57	15.22	15.50	16.18	17.40
	4H	15.65	16.25	16.59	17.20	18.44	15.25	15.85	16.20	16.81	18.05
	6H	16.14	16.66	17.10	17.64	18.88	15.75	16.27	16.71	17.24	18.48
	8H	16.28	16.77	17.24	17.74	18.99	15.88	16.37	16.85	17.34	18.59
	12H	16.35	16.78	17.33	17.77	19.03	15.94	16.38	16.92	17.37	18.62
8H	4H	15.84	16.32	16.80	17.29	18.55	15.49	15.97	16.45	16.94	18.19
	6H	16.44	16.84	17.43	17.86	19.11	16.09	16.49	17.08	17.50	18.76
	8H	16.65	17.00	17.64	18.00	19.27	16.29	16.65	17.29	17.65	18.92
	12H	16.77	17.08	17.77	18.07	19.39	16.40	16.71	17.40	17.70	19.02
12H	4H	15.82	16.26	16.80	17.25	18.51	15.48	15.92	16.46	16.91	18.16
	6H	16.47	16.82	17.46	17.82	19.09	16.13	16.48	17.12	17.48	18.75
	8H	16.69	17.01	17.69	18.00	19.32	16.35	16.66	17.35	17.66	18.97