

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902554

Luminaire Tested: DFN2DIP-HX3F0-040D060US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902554
REPORT IS A COMBINATION OF REPORTS P899245 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-040D060US830-FLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8737.4 lumens
Efficiency: N/A
Efficacy: 109.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 79.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902554
CATALOG NUMBER: DFN2DIP-HX3F0-040D060US830-FLLFLL

Luminous Intensity Polar Plot

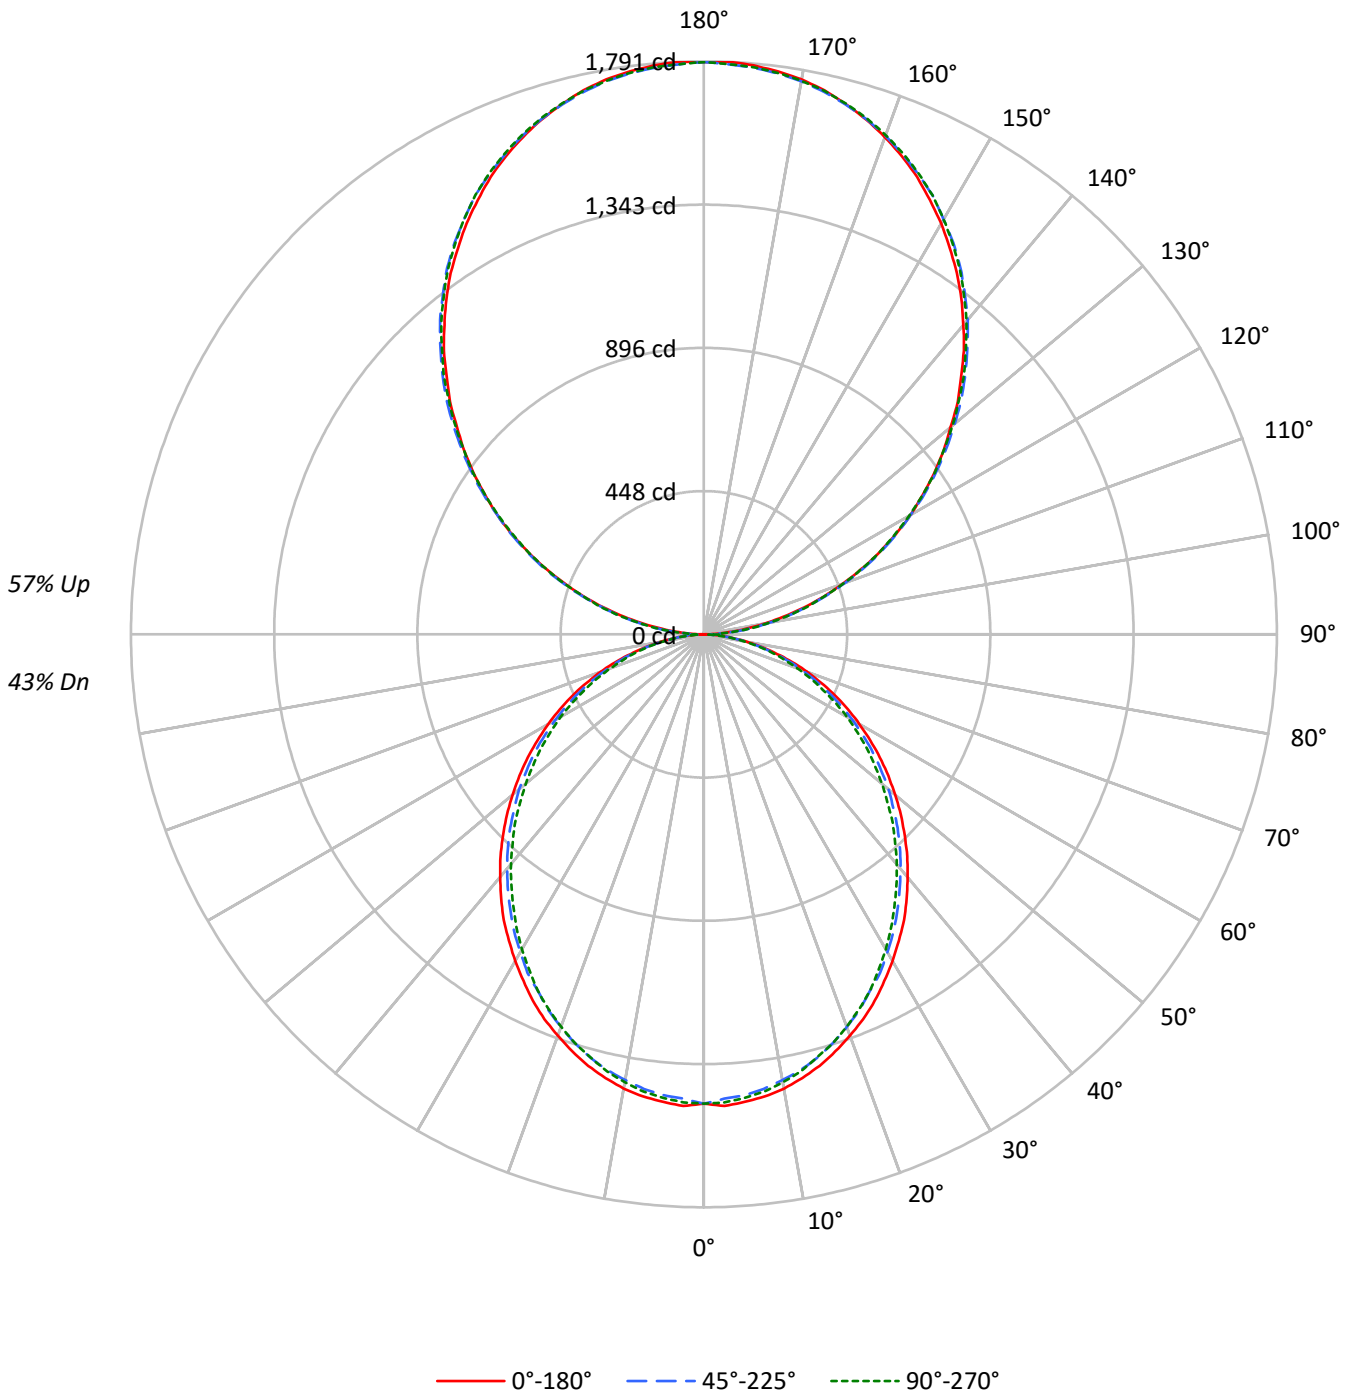



TEST NUMBER: P902554

CATALOG NUMBER: DFN2DIP-HX3F0-040D060US830-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	49	49	49	43
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42	44	43	42	36
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35	38	37	35	30
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30	34	32	30	26
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26	30	28	26	22
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22	27	25	22	19
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18	23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1699	1699	1699
5°	1701	1674	1686
10°	1687	1651	1662
15°	1661	1622	1626
20°	1627	1583	1588
25°	1593	1537	1545
30°	1550	1494	1490
35°	1510	1443	1433
40°	1460	1392	1378
45°	1410	1340	1321
50°	1356	1286	1256
55°	1300	1224	1196
60°	1235	1149	1127
65°	1165	1072	1046
70°	1076	978	958
75°	952	866	876
80°	802	722	722
85°	569	477	468

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1682 cd/sqm



TEST NUMBER: P902554

CATALOG NUMBER: DFN2DIP-HX3F0-040D060US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.1	1.6
10°-20°	388.5	4.4
20°-30°	570.9	6.5
30°-40°	663.1	7.6
40°-50°	662.3	7.6
50°-60°	577.5	6.6
60°-70°	426.9	4.9
70°-80°	241.5	2.8
80°-90°	68.8	0.8
90°-100°	110.7	1.3
100°-110°	351.6	4.0
110°-120°	601.8	6.9
120°-130°	791.4	9.1
130°-140°	888.4	10.2
140°-150°	871.1	10.0
150°-160°	730.8	8.4
160°-170°	484.6	5.5
170°-180°	169.4	1.9
0°-30°	1097.5	12.6
0°-40°	1760.6	20.1
0°-60°	3000.3	34.3
0°-90°	3737.5	42.8
90°-120°	1064.1	12.2
90°-150°	3615.0	41.4
90°-180°	5000.0	57.2
0°-180°	8737.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1467	1467	1467	1467	1467	
5°	1467	1461	1446	1457	1454	139
15°	1396	1388	1370	1375	1368	393
25°	1264	1253	1229	1231	1229	582
35°	1090	1076	1054	1045	1038	681
45°	887	878	856	841	835	685
55°	672	663	646	629	622	600
65°	453	444	430	418	411	448
75°	237	234	227	219	222	253
85°	58	56	55	51	49	64
90°	2	19	53	50	51	9
95°	79	94	96	96	94	88
105°	325	329	332	335	335	343
115°	604	613	610	608	604	597
125°	878	892	888	883	881	785
135°	1136	1153	1156	1154	1150	878
145°	1379	1390	1399	1400	1394	862
155°	1577	1582	1586	1594	1589	726
165°	1716	1714	1714	1725	1717	484
175°	1785	1781	1778	1789	1779	170
180°	1789	1789	1789	1789	1789	



TEST NUMBER: P902554

CATALOG NUMBER: DFN2DIP-HX3F0-040D060US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1467.0	1467.0	1467.0	1467.0	1467.0
2.5°	1475.5	1468.5	1452.9	1467.0	1464.3
5°	1467.0	1461.4	1445.9	1457.1	1454.4
7.5°	1457.1	1448.7	1433.1	1444.5	1441.7
10°	1441.7	1431.8	1414.9	1426.2	1421.9
12.5°	1420.4	1412.0	1395.2	1402.2	1399.3
15°	1396.5	1388.1	1369.7	1375.4	1368.4
17.5°	1366.9	1358.5	1340.1	1347.1	1340.1
20°	1334.4	1326.0	1306.3	1310.4	1304.9
22.5°	1302.0	1289.3	1270.9	1270.9	1268.1
25°	1263.9	1252.6	1228.7	1231.4	1228.7
27.5°	1221.5	1211.6	1193.4	1189.2	1182.2
30°	1179.3	1168.0	1146.9	1142.6	1137.0
32.5°	1134.2	1125.8	1103.2	1094.7	1088.9
35°	1090.4	1076.4	1053.8	1045.3	1038.2
37.5°	1041.0	1028.3	1005.7	995.9	988.8
40°	990.3	978.9	956.3	943.8	938.1
42.5°	940.9	929.5	907.1	892.9	884.5
45°	887.3	877.5	856.2	840.8	835.1
47.5°	835.1	825.2	802.7	787.1	778.7
50°	780.0	773.0	753.3	733.5	726.4
52.5°	726.4	716.6	698.3	682.8	672.9
55°	671.6	663.0	646.1	629.1	622.2
57.5°	616.4	609.4	591.0	574.1	568.4
60°	561.4	555.8	536.1	520.6	516.3
62.5°	507.8	497.9	483.9	469.8	464.1
65°	452.9	444.3	430.3	417.5	410.6
67.5°	396.4	389.3	376.7	366.8	361.2
70°	344.2	338.6	325.8	315.9	310.4
72.5°	290.7	284.9	278.0	268.1	263.8
75°	237.0	234.2	227.1	218.7	221.5
77.5°	189.0	183.3	180.5	176.3	172.1
80°	141.1	139.6	136.8	132.6	129.8
82.5°	96.0	96.0	94.6	88.9	88.9
85°	57.8	56.5	55.0	50.7	49.4
87.5°	25.4	22.6	19.8	15.6	14.0
90°	1.6	19.4	52.9	49.6	51.2
92.5°	33.5	45.3	46.9	48.5	48.5
95°	78.7	93.8	96.5	96.5	93.8
97.5°	131.0	145.1	151.0	151.0	151.0
100°	191.4	203.8	208.1	208.1	206.5
102.5°	255.1	264.2	270.1	271.7	270.1
105°	324.6	328.9	332.2	334.9	334.9
107.5°	393.6	400.1	400.1	401.1	393.6
110°	460.5	469.1	469.1	469.1	464.8



TEST NUMBER: P902554

CATALOG NUMBER: DFN2DIP-HX3F0-040D060US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	532.7	541.9	540.3	535.9	532.7
115°	603.9	612.6	609.8	608.2	603.9
117.5°	674.6	686.5	678.8	674.6	670.2
120°	745.7	757.6	745.7	745.7	740.8
122.5°	810.4	825.5	817.9	813.7	810.4
125°	878.4	891.8	887.5	882.7	881.1
127.5°	944.7	961.4	955.5	949.0	944.7
130°	1006.7	1026.1	1023.4	1020.2	1014.3
132.5°	1076.3	1091.4	1092.4	1084.9	1080.5
135°	1136.1	1152.8	1156.0	1154.4	1150.1
137.5°	1203.0	1216.4	1219.2	1218.0	1211.6
140°	1261.8	1275.3	1282.8	1282.8	1276.9
142.5°	1322.1	1335.6	1339.9	1341.5	1335.6
145°	1379.3	1390.1	1398.7	1400.3	1394.4
147.5°	1430.5	1444.0	1450.5	1453.1	1447.2
150°	1483.4	1492.5	1498.5	1503.3	1498.5
152.5°	1530.2	1539.5	1547.0	1552.9	1547.0
155°	1577.2	1581.5	1586.3	1593.9	1589.0
157.5°	1617.6	1620.9	1623.5	1634.4	1626.8
160°	1653.8	1657.0	1658.6	1667.7	1661.3
162.5°	1687.2	1687.2	1688.8	1699.0	1691.5
165°	1715.7	1714.1	1714.1	1724.9	1717.4
167.5°	1741.6	1736.8	1736.8	1747.6	1740.0
170°	1761.0	1756.7	1755.1	1765.9	1756.7
172.5°	1774.5	1770.2	1768.6	1779.3	1770.2
175°	1785.3	1781.0	1777.7	1788.6	1779.3
177.5°	1791.2	1787.0	1783.7	1792.8	1783.7
180°	1788.6	1788.6	1788.6	1788.6	1788.6



TEST NUMBER: P902554
 CATALOG NUMBER: DFN2DIP-HX3F0-040D060US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.36	9.16	9.38	10.19	11.56	7.93	8.73	8.95	9.76	11.13
	3H	10.01	10.73	11.04	11.76	13.15	9.54	10.26	10.57	11.29	12.68
	4H	10.59	11.27	11.63	12.31	13.70	10.12	10.80	11.16	11.84	13.24
	6H	10.98	11.61	12.03	12.65	14.06	10.51	11.14	11.56	12.18	13.59
	8H	11.08	11.68	12.13	12.73	14.14	10.61	11.21	11.66	12.26	13.67
	12H	11.12	11.69	12.18	12.74	14.17	10.65	11.21	11.71	12.27	13.70
4H	2H	8.81	9.49	9.86	10.53	11.93	8.47	9.15	9.52	10.19	11.59
	3H	10.66	11.23	11.72	12.30	13.71	10.27	10.84	11.33	11.91	13.32
	4H	11.37	11.89	12.43	12.95	14.38	10.97	11.49	12.03	12.54	13.98
	6H	11.87	12.32	12.94	13.40	14.83	11.47	11.92	12.54	13.00	14.42
	8H	12.02	12.44	13.09	13.51	14.95	11.61	12.03	12.68	13.10	14.55
	12H	12.09	12.46	13.17	13.55	15.00	11.67	12.05	12.76	13.13	14.58
8H	4H	11.56	11.98	12.63	13.05	14.49	11.20	11.62	12.27	12.69	14.13
	6H	12.18	12.52	13.27	13.64	15.08	11.82	12.16	12.91	13.28	14.72
	8H	12.39	12.70	13.49	13.79	15.25	12.03	12.33	13.13	13.43	14.89
	12H	12.52	12.78	13.62	13.88	15.38	12.14	12.40	13.24	13.50	15.00
12H	4H	11.54	11.92	12.63	13.00	14.45	11.19	11.57	12.28	12.65	14.10
	6H	12.21	12.51	13.31	13.61	15.07	11.86	12.16	12.96	13.26	14.72
	8H	12.44	12.71	13.54	13.80	15.30	12.09	12.35	13.19	13.44	14.94