

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910828

Luminaire Tested: DFN2DIP-HX3F0-080D040US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910828
REPORT IS A COMBINATION OF REPORTS P899226 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-080D040US850-RLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11467.0 lumens
Efficiency: N/A
Efficacy: 104.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 109.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910828
CATALOG NUMBER: DFN2DIP-HX3F0-080D040US850-RLLFLL

Luminous Intensity Polar Plot

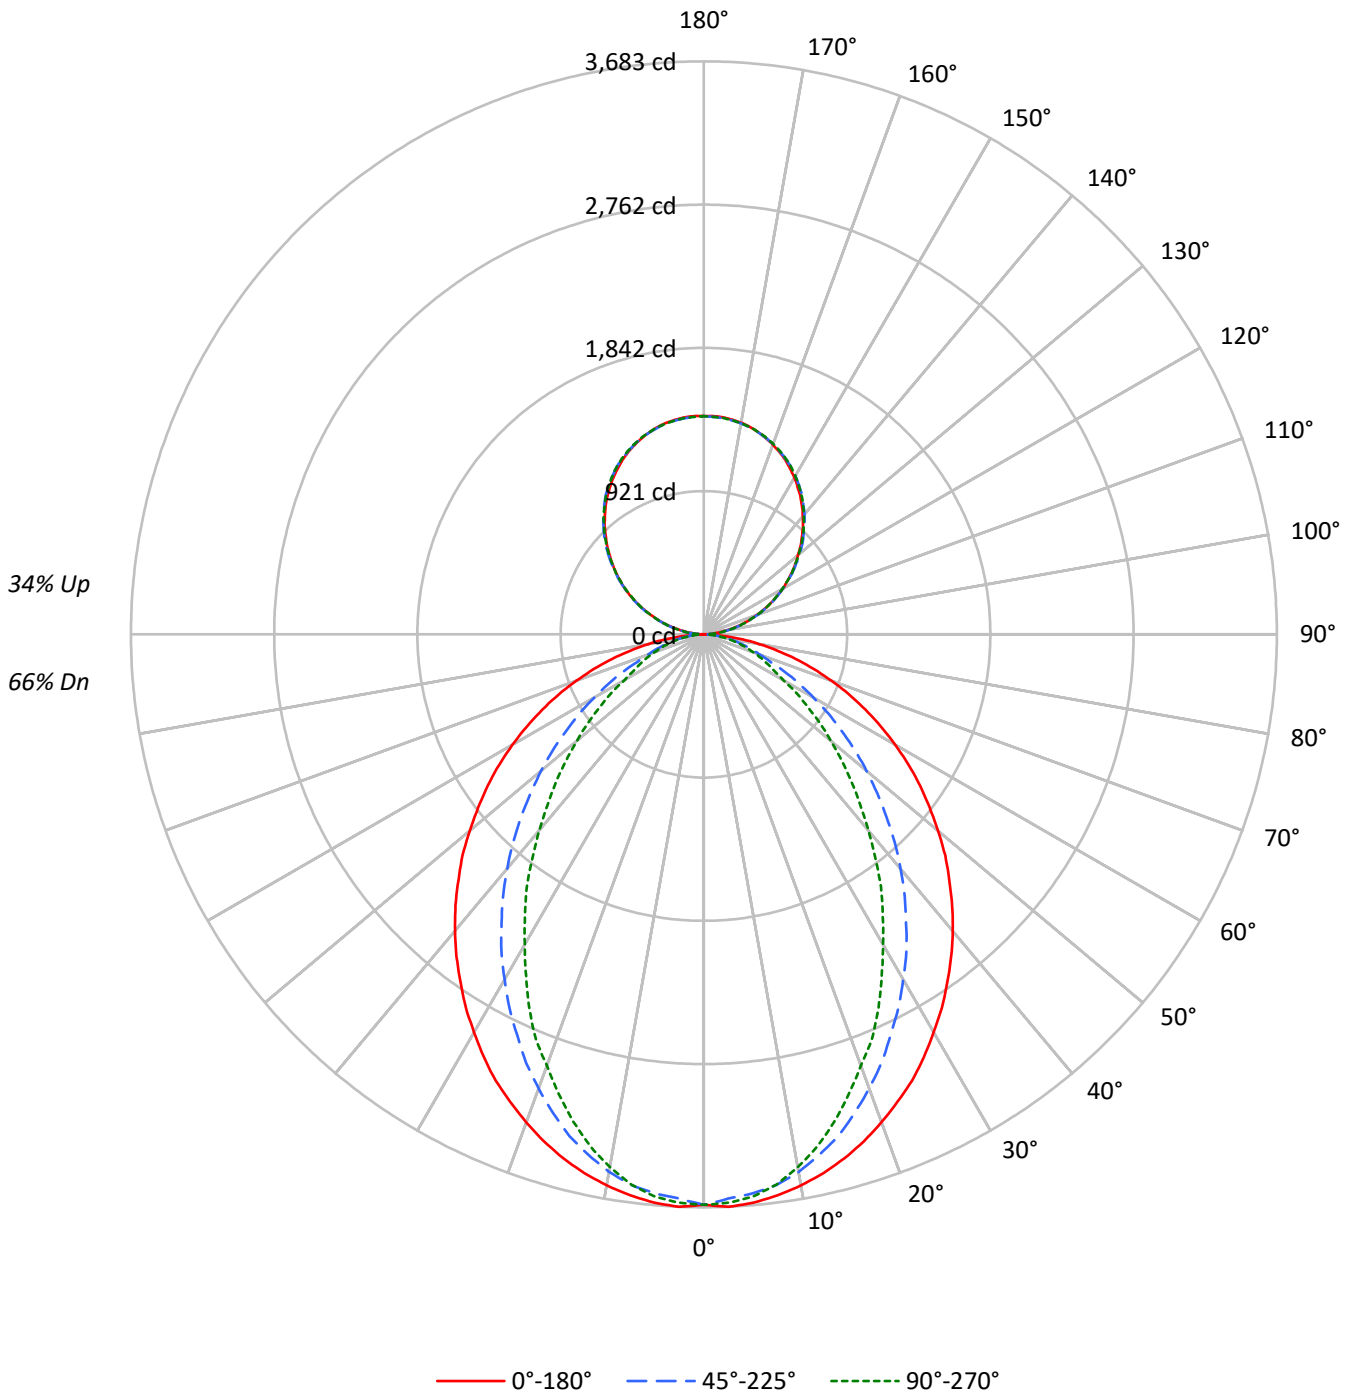



TEST NUMBER: P910828

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US850-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71	66				66
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61	57				57
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52	49				49
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45	42				42
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40	36				36
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35	32				32
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31	29				29
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28	26				26
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25	23				23
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23	21				21
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21	19				19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4247	4247	4247
5°	4252	4177	4204
10°	4208	4092	4065
15°	4148	3954	3852
20°	4070	3765	3590
25°	3989	3553	3338
30°	3882	3337	3019
35°	3777	3104	2738
40°	3669	2864	2417
45°	3545	2597	2127
50°	3416	2329	1842
55°	3281	2042	1570
60°	3125	1743	1290
65°	2945	1439	1158
70°	2727	1156	1045
75°	2453	1012	946
80°	2056	840	812
85°	1405	547	597

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3545 cd/sqm



TEST NUMBER: P910828

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US850-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	343.7	3.0
10°-20°	943.4	8.2
20°-30°	1324.5	11.6
30°-40°	1443.8	12.6
40°-50°	1327.0	11.6
50°-60°	1042.1	9.1
60°-70°	678.3	5.9
70°-80°	349.2	3.0
80°-90°	93.1	0.8
90°-100°	86.8	0.8
100°-110°	275.8	2.4
110°-120°	472.0	4.1
120°-130°	620.8	5.4
130°-140°	696.8	6.1
140°-150°	683.3	6.0
150°-160°	573.2	5.0
160°-170°	380.1	3.3
170°-180°	132.9	1.2
0°-30°	2611.6	22.8
0°-40°	4055.4	35.4
0°-60°	6424.5	56.0
0°-90°	7545.2	65.8
90°-120°	834.7	7.3
90°-150°	2835.6	24.7
90°-180°	3922.0	34.2
0°-180°	11467.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3667	3667	3667	3667	3667	
5°	3667	3650	3607	3637	3627	348
15°	3488	3451	3338	3275	3242	983
25°	3166	3060	2840	2705	2655	1456
35°	2728	2558	2267	2058	1984	1707
45°	2230	2008	1659	1423	1344	1722
55°	1696	1437	1078	879	816	1515
65°	1145	876	577	465	454	1135
75°	610	378	266	242	239	646
85°	143	73	63	63	63	164
90°	1	15	42	39	40	11
95°	62	74	76	76	74	69
105°	255	258	260	263	263	269
115°	474	480	478	477	474	469
125°	689	700	696	692	691	616
135°	891	904	907	906	902	689
145°	1082	1090	1097	1098	1094	676
155°	1237	1240	1244	1250	1246	569
165°	1346	1345	1345	1353	1347	380
175°	1400	1397	1394	1403	1396	133
180°	1403	1403	1403	1403	1403	



TEST NUMBER: P910828

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3666.8	3666.8	3666.8	3666.8	3666.8
2.5°	3683.3	3666.8	3630.2	3663.6	3656.9
5°	3666.8	3650.3	3606.9	3636.9	3627.0
7.5°	3636.9	3617.1	3570.6	3583.7	3567.1
10°	3597.0	3573.9	3507.7	3497.5	3477.7
12.5°	3547.5	3517.5	3427.7	3408.0	3371.4
15°	3487.6	3451.0	3338.3	3275.3	3242.2
17.5°	3417.8	3364.7	3225.3	3152.4	3099.2
20°	3338.3	3271.8	3106.0	3023.2	2949.9
22.5°	3252.0	3175.6	2983.1	2870.4	2820.7
25°	3165.8	3059.5	2840.5	2704.6	2654.6
27.5°	3062.9	2949.9	2707.7	2551.8	2475.4
30°	2953.5	2827.1	2561.7	2392.7	2302.8
32.5°	2847.1	2694.4	2422.6	2223.3	2140.3
35°	2727.8	2558.5	2266.6	2057.5	1984.2
37.5°	2611.6	2428.9	2120.5	1891.3	1808.6
40°	2488.8	2289.9	1967.7	1732.1	1645.9
42.5°	2362.7	2150.5	1815.2	1569.6	1486.7
45°	2230.0	2007.5	1659.3	1423.4	1343.9
47.5°	2104.0	1868.4	1510.0	1274.1	1201.3
50°	1964.5	1729.0	1364.0	1134.7	1065.3
52.5°	1828.3	1579.3	1224.4	1005.5	942.5
55°	1695.6	1436.8	1078.4	879.4	816.4
57.5°	1559.7	1294.2	949.2	763.3	710.1
60°	1420.2	1154.8	812.9	643.9	590.8
62.5°	1284.3	1018.8	696.8	537.6	511.2
65°	1144.9	875.9	577.3	464.8	454.5
67.5°	1012.2	743.3	464.8	408.0	398.2
70°	872.8	614.1	384.8	351.7	338.4
72.5°	740.0	494.3	321.8	295.4	288.7
75°	610.5	378.2	265.5	242.2	239.1
77.5°	481.3	268.6	209.2	195.7	189.1
80°	361.5	192.6	159.1	146.1	146.1
82.5°	252.1	129.5	109.5	102.8	102.8
85°	142.6	72.9	63.0	63.0	63.0
87.5°	53.1	26.4	26.4	23.3	23.3
90°	1.2	15.2	41.5	38.9	40.1
92.5°	26.2	35.5	36.8	38.0	38.0
95°	61.8	73.6	75.7	75.7	73.6
97.5°	102.8	113.8	118.4	118.4	118.4
100°	150.2	159.9	163.2	163.2	162.0
102.5°	200.1	207.3	211.9	213.1	211.9
105°	254.6	258.0	260.5	262.6	262.6
107.5°	308.7	313.8	313.8	314.6	308.7
110°	361.2	368.0	368.0	368.0	364.6



TEST NUMBER: P910828

CATALOG NUMBER: DFN2DIP-HX3F0-080D040US850-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	417.9	425.1	423.7	420.4	417.9
115°	473.7	480.5	478.3	477.1	473.7
117.5°	529.1	538.4	532.5	529.1	525.8
120°	585.0	594.2	585.0	585.0	581.1
122.5°	635.7	647.5	641.7	638.2	635.7
125°	689.0	699.6	696.2	692.3	691.1
127.5°	741.0	754.1	749.5	744.4	741.0
130°	789.6	804.9	802.8	800.3	795.6
132.5°	844.2	856.0	856.9	850.9	847.6
135°	891.2	904.3	906.8	905.5	902.2
137.5°	943.6	954.2	956.3	955.4	950.4
140°	989.7	1000.3	1006.2	1006.2	1001.5
142.5°	1037.1	1047.7	1051.0	1052.3	1047.7
145°	1081.9	1090.4	1097.1	1098.5	1093.8
147.5°	1122.1	1132.6	1137.7	1139.8	1135.2
150°	1163.6	1170.8	1175.4	1179.2	1175.4
152.5°	1200.4	1207.5	1213.5	1218.1	1213.5
155°	1237.1	1240.5	1244.3	1250.3	1246.4
157.5°	1268.9	1271.4	1273.5	1282.0	1276.0
160°	1297.2	1299.7	1301.0	1308.2	1303.1
162.5°	1323.4	1323.4	1324.7	1332.7	1326.8
165°	1345.9	1344.6	1344.6	1353.0	1347.1
167.5°	1366.2	1362.3	1362.3	1370.8	1364.8
170°	1381.4	1377.9	1376.7	1385.1	1377.9
172.5°	1391.9	1388.6	1387.2	1395.8	1388.6
175°	1400.4	1397.0	1394.5	1402.9	1395.8
177.5°	1405.1	1401.7	1399.1	1406.3	1399.1
180°	1402.9	1402.9	1402.9	1402.9	1402.9



TEST NUMBER: P910828
 CATALOG NUMBER: DFN2DIP-HX3F0-080D040US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.49	14.47	14.30	15.30	16.33	9.46	10.44	10.28	11.28	12.31
	3H	15.17	16.05	16.00	16.89	17.95	10.66	11.54	11.49	12.38	13.44
	4H	15.78	16.61	16.63	17.46	18.52	11.11	11.94	11.96	12.79	13.86
	6H	16.20	16.96	17.06	17.82	18.90	11.44	12.20	12.30	13.06	14.14
	8H	16.33	17.05	17.20	17.93	19.01	11.53	12.25	12.40	13.13	14.21
	12H	16.39	17.08	17.26	17.95	19.06	11.58	12.27	12.45	13.14	14.24
4H	2H	13.52	14.35	14.37	15.20	16.27	10.07	10.90	10.92	11.75	12.82
	3H	15.36	16.04	16.22	16.93	18.01	11.43	12.12	12.29	13.00	14.08
	4H	16.05	16.67	16.92	17.55	18.66	11.98	12.61	12.86	13.49	14.60
	6H	16.57	17.10	17.45	18.01	19.12	12.40	12.94	13.29	13.85	14.96
	8H	16.74	17.24	17.63	18.14	19.27	12.53	13.04	13.43	13.93	15.06
	12H	16.84	17.29	17.75	18.21	19.34	12.60	13.05	13.51	13.97	15.10
8H	4H	16.03	16.53	16.92	17.43	18.55	12.27	12.77	13.16	13.67	14.80
	6H	16.59	17.00	17.51	17.95	19.07	12.79	13.20	13.70	14.14	15.27
	8H	16.80	17.17	17.73	18.10	19.25	12.97	13.34	13.90	14.27	15.42
	12H	16.94	17.27	17.87	18.19	19.39	13.10	13.42	14.03	14.34	15.54
12H	4H	15.99	16.44	16.90	17.35	18.49	12.28	12.73	13.19	13.65	14.78
	6H	16.57	16.93	17.49	17.87	19.01	12.83	13.20	13.76	14.13	15.28
	8H	16.79	17.11	17.72	18.04	19.23	13.05	13.37	13.98	14.29	15.49