

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918971

Luminaire Tested: DFN2DIP-HX3F0-060D060US935-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918971
REPORT IS A COMBINATION OF REPORTS P900769 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-060D060US935-FLLONL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10228.6 lumens
Efficiency: N/A
Efficacy: 100.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 102
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918971
CATALOG NUMBER: DFN2DIP-HX3F0-060D060US935-FLLONL

Luminous Intensity Polar Plot

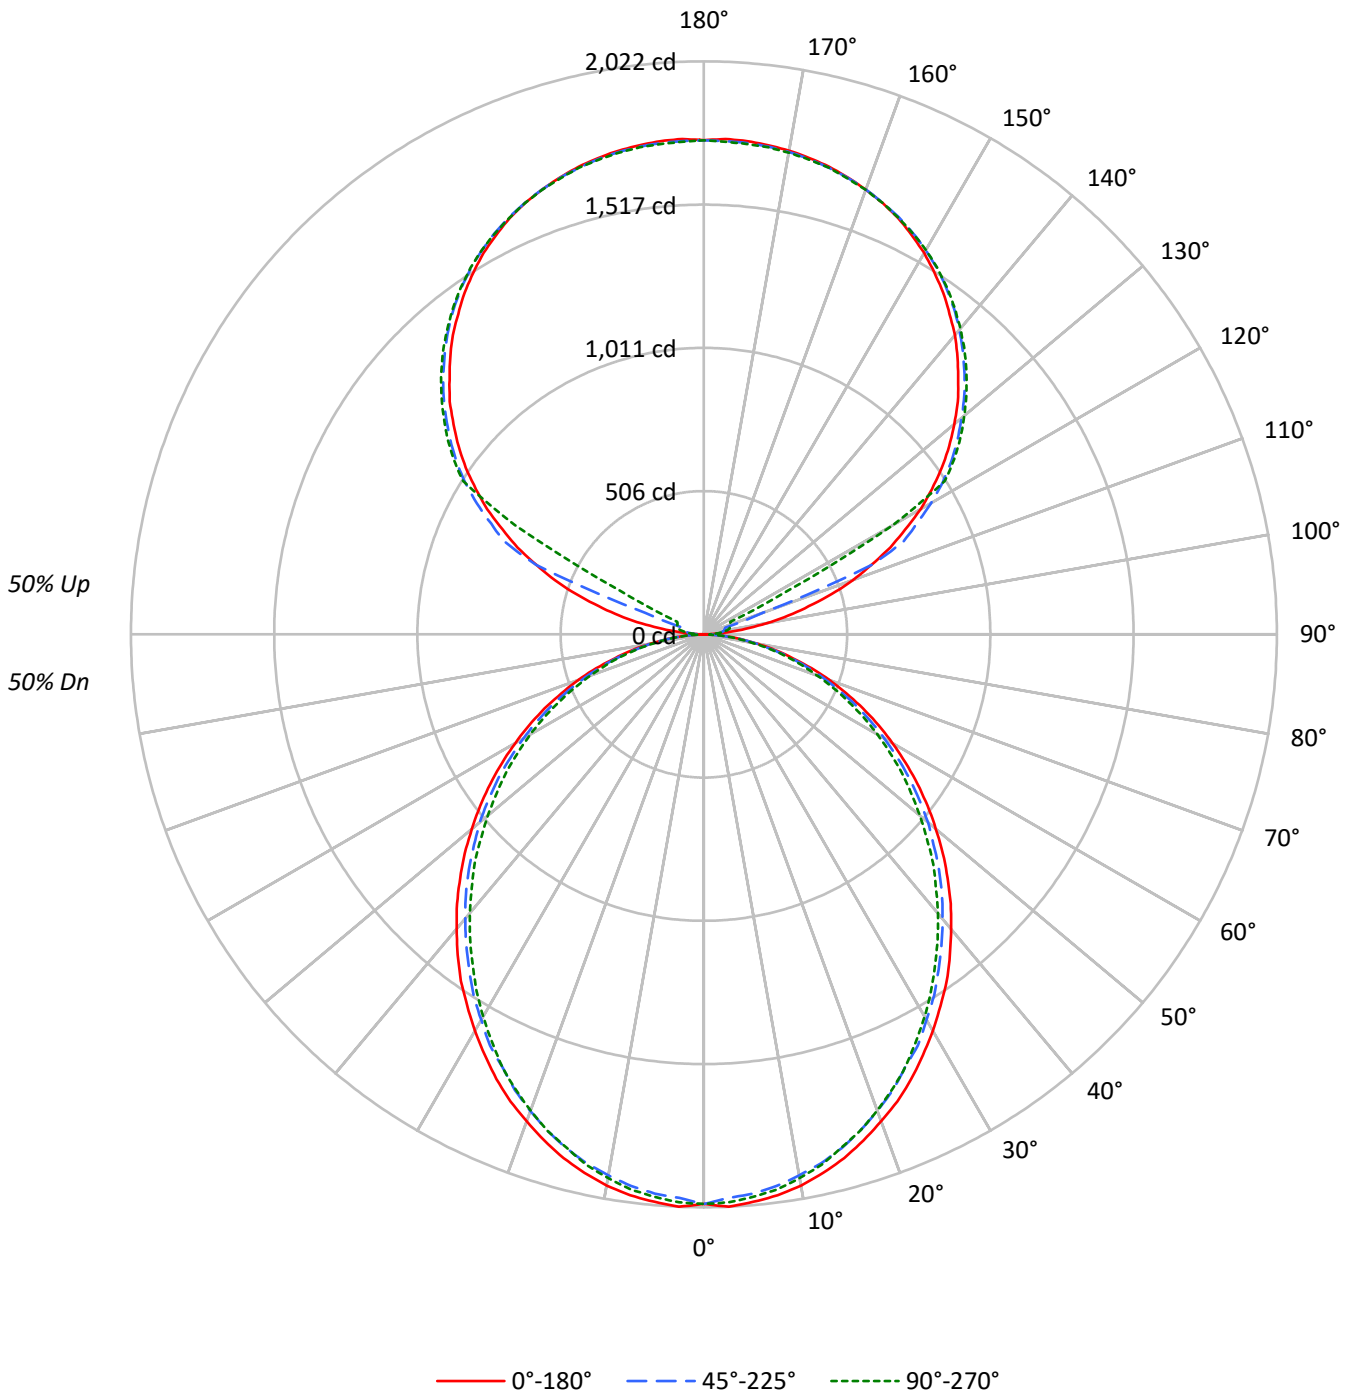



TEST NUMBER: P918971

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	56	56	56	50
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47	50	48	47	42
2	89	82	75	70	82	76	70	66	64	60	57	53	51	48	44	42	40	44	42	40	35
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34	39	36	34	30
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29	35	32	29	26
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	26	31	28	26	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	27	28	25	23	28	25	23	20
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	23	20	26	23	20	17
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18	24	20	18	16
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2328	2328	2328
5°	2331	2294	2310
10°	2311	2262	2278
15°	2276	2223	2227
20°	2229	2170	2176
25°	2182	2106	2117
30°	2124	2047	2042
35°	2069	1977	1963
40°	2001	1907	1888
45°	1933	1836	1811
50°	1858	1762	1721
55°	1781	1677	1639
60°	1693	1575	1545
65°	1596	1469	1433
70°	1474	1341	1313
75°	1304	1186	1200
80°	1100	989	988
85°	779	654	641

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1933 cd/sqm



TEST NUMBER: P918971

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.2	1.8
10°-20°	532.3	5.2
20°-30°	782.3	7.6
30°-40°	908.6	8.9
40°-50°	907.5	8.9
50°-60°	791.3	7.7
60°-70°	584.9	5.7
70°-80°	330.9	3.2
80°-90°	90.4	0.9
90°-100°	57.5	0.6
100°-110°	214.3	2.1
110°-120°	568.4	5.6
120°-130°	942.7	9.2
130°-140°	1001.4	9.8
140°-150°	930.7	9.1
150°-160°	748.2	7.3
160°-170°	482.1	4.7
170°-180°	165.9	1.6
0°-30°	1503.8	14.7
0°-40°	2412.4	23.6
0°-60°	4111.1	40.2
0°-90°	5117.4	50.0
90°-120°	840.2	8.2
90°-150°	3714.9	36.3
90°-180°	5111.0	50.0
0°-180°	10228.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2010	2010	2010	2010	2010	
5°	2010	2002	1981	1997	1993	191
15°	1914	1902	1877	1885	1875	539
25°	1732	1716	1684	1687	1684	797
35°	1494	1475	1444	1432	1422	933
45°	1216	1202	1173	1152	1144	938
55°	920	908	885	862	852	823
65°	620	609	590	572	562	614
75°	325	321	311	300	304	347
85°	79	77	75	70	68	88
90°	1	15	25	32	34	9
95°	82	40	49	56	54	97
105°	384	421	77	91	96	410
115°	725	747	778	194	104	714
125°	1026	1042	1066	1075	1079	915
135°	1269	1289	1301	1313	1311	980
145°	1472	1471	1492	1501	1495	921
155°	1621	1610	1625	1632	1622	747
165°	1708	1701	1704	1713	1704	483
175°	1747	1738	1741	1750	1737	166
180°	1743	1743	1743	1743	1743	



TEST NUMBER: P918971

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2010.1	2010.1	2010.1	2010.1	2010.1
2.5°	2021.8	2012.2	1990.8	2010.1	2006.4
5°	2010.1	2002.5	1981.2	1996.6	1992.9
7.5°	1996.6	1985.1	1963.8	1979.3	1975.5
10°	1975.5	1962.0	1938.7	1954.1	1948.4
12.5°	1946.4	1934.8	1911.7	1921.3	1917.4
15°	1913.5	1902.0	1876.8	1884.6	1875.0
17.5°	1872.9	1861.5	1836.3	1845.8	1836.3
20°	1828.4	1817.0	1789.8	1795.6	1788.0
22.5°	1784.2	1766.7	1741.5	1741.5	1737.6
25°	1731.8	1716.5	1683.6	1687.3	1683.6
27.5°	1673.8	1660.3	1635.2	1629.5	1619.9
30°	1616.0	1600.3	1571.5	1565.7	1557.9
32.5°	1554.0	1542.6	1511.6	1499.9	1492.1
35°	1494.2	1474.9	1443.9	1432.2	1422.5
37.5°	1426.5	1409.0	1378.1	1364.5	1354.9
40°	1356.9	1341.3	1310.4	1293.2	1285.4
42.5°	1289.3	1273.7	1242.9	1223.5	1211.9
45°	1215.9	1202.3	1173.2	1152.1	1144.3
47.5°	1144.3	1130.7	1099.8	1078.5	1066.9
50°	1068.8	1059.2	1032.2	1005.0	995.4
52.5°	995.4	981.9	956.8	935.6	922.0
55°	920.1	908.4	885.3	862.1	852.5
57.5°	844.7	835.1	809.9	786.7	778.9
60°	769.2	761.6	734.6	713.3	707.5
62.5°	695.8	682.3	663.0	643.7	635.9
65°	620.5	608.9	589.6	572.1	562.5
67.5°	543.2	533.4	516.2	502.7	494.8
70°	471.7	463.9	446.4	432.9	425.3
72.5°	398.2	390.5	380.8	367.3	361.5
75°	324.6	321.0	311.1	299.6	303.5
77.5°	259.0	251.2	247.3	241.6	235.8
80°	193.4	191.3	187.4	181.7	177.8
82.5°	131.5	131.5	129.6	121.8	121.8
85°	79.1	77.3	75.4	69.5	67.7
87.5°	34.9	31.0	27.0	21.4	19.3
90°	1.2	15.2	25.1	31.6	34.0
92.5°	31.6	26.5	30.2	32.8	34.0
95°	82.0	40.3	49.2	55.6	54.2
97.5°	147.6	44.2	64.2	68.2	69.4
100°	223.3	50.5	71.9	82.0	84.5
102.5°	306.5	304.1	74.5	88.3	92.1
105°	383.5	421.4	77.0	90.7	95.9
107.5°	473.1	504.5	79.6	93.3	98.4
110°	559.0	585.3	220.8	94.7	99.6



TEST NUMBER: P918971

CATALOG NUMBER: DFN2DIP-HX3F0-060D060US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	639.6	662.3	640.8	97.0	101.0
115°	725.4	746.8	778.4	194.3	103.5
117.5°	799.8	825.0	846.5	666.1	335.5
120°	883.1	902.0	924.8	939.9	769.6
122.5°	953.6	973.9	999.2	1006.7	1008.1
125°	1025.6	1042.1	1066.0	1074.9	1078.6
127.5°	1091.2	1108.9	1127.9	1140.5	1141.7
130°	1153.0	1173.3	1187.1	1201.0	1199.8
132.5°	1216.2	1232.6	1246.4	1257.7	1256.5
135°	1269.2	1289.4	1300.6	1313.4	1310.8
137.5°	1324.6	1339.7	1352.5	1365.0	1361.3
140°	1378.8	1389.0	1402.8	1414.2	1407.9
142.5°	1424.3	1433.2	1449.6	1459.6	1453.3
145°	1472.3	1470.9	1492.4	1501.2	1495.0
147.5°	1513.8	1510.0	1531.5	1537.7	1532.8
150°	1554.3	1545.4	1565.6	1573.1	1566.8
152.5°	1588.3	1578.2	1597.1	1604.7	1595.9
155°	1621.1	1609.8	1625.0	1632.5	1622.4
157.5°	1647.6	1637.5	1648.9	1657.8	1647.6
160°	1670.3	1662.7	1670.3	1677.8	1669.0
162.5°	1690.4	1682.9	1689.2	1698.1	1686.7
165°	1708.1	1700.6	1704.3	1713.2	1704.3
167.5°	1722.0	1714.4	1718.3	1727.2	1715.7
170°	1733.4	1725.8	1728.4	1737.1	1725.8
172.5°	1740.9	1733.4	1735.9	1744.8	1733.4
175°	1747.2	1738.4	1740.9	1749.7	1737.1
177.5°	1749.7	1740.9	1742.2	1751.1	1739.7
180°	1743.4	1743.4	1743.4	1743.4	1743.4



TEST NUMBER: P918971
 CATALOG NUMBER: DFN2DIP-HX3F0-060D060US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.17	11.03	11.12	12.00	13.27	9.74	10.60	10.70	11.57	12.84
	3H	11.82	12.59	12.79	13.57	14.87	11.35	12.12	12.32	13.11	14.40
	4H	12.40	13.13	13.38	14.12	15.42	11.93	12.67	12.92	13.65	14.95
	6H	12.80	13.47	13.79	14.46	15.78	12.33	13.00	13.32	13.99	15.31
	8H	12.90	13.54	13.90	14.55	15.86	12.43	13.07	13.43	14.08	15.39
	12H	12.94	13.55	13.95	14.56	15.89	12.47	13.08	13.47	14.08	15.42
4H	2H	10.63	11.36	11.61	12.34	13.65	10.28	11.02	11.27	12.00	13.30
	3H	12.48	13.09	13.48	14.11	15.42	12.09	12.70	13.09	13.72	15.03
	4H	13.19	13.75	14.20	14.76	16.10	12.79	13.35	13.80	14.36	15.69
	6H	13.70	14.18	14.72	15.21	16.55	13.29	13.78	14.31	14.81	16.14
	8H	13.85	14.30	14.86	15.32	16.67	13.44	13.89	14.46	14.91	16.26
	12H	13.92	14.32	14.95	15.36	16.72	13.50	13.90	14.54	14.94	16.30
8H	4H	13.39	13.83	14.40	14.86	16.21	13.03	13.48	14.05	14.50	15.85
	6H	14.01	14.38	15.05	15.44	16.79	13.65	14.02	14.69	15.09	16.43
	8H	14.22	14.55	15.27	15.60	16.97	13.86	14.19	14.91	15.24	16.60
	12H	14.35	14.64	15.40	15.68	17.09	13.97	14.26	15.02	15.30	16.71
12H	4H	13.37	13.78	14.41	14.82	16.17	13.02	13.43	14.06	14.47	15.82
	6H	14.04	14.36	15.09	15.41	16.78	13.69	14.02	14.74	15.07	16.43
	8H	14.27	14.56	15.33	15.61	17.02	13.92	14.21	14.97	15.25	16.66