

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921773

Luminaire Tested: DFN2DIP-HX3F0-090D060US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921773
REPORT IS A COMBINATION OF REPORTS P900776 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-090D060US940-RLONL
Description: 3 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12118.3 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 138
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921773
CATALOG NUMBER: DFN2DIP-HX3F0-090D060US940-RLLONL

Luminous Intensity Polar Plot

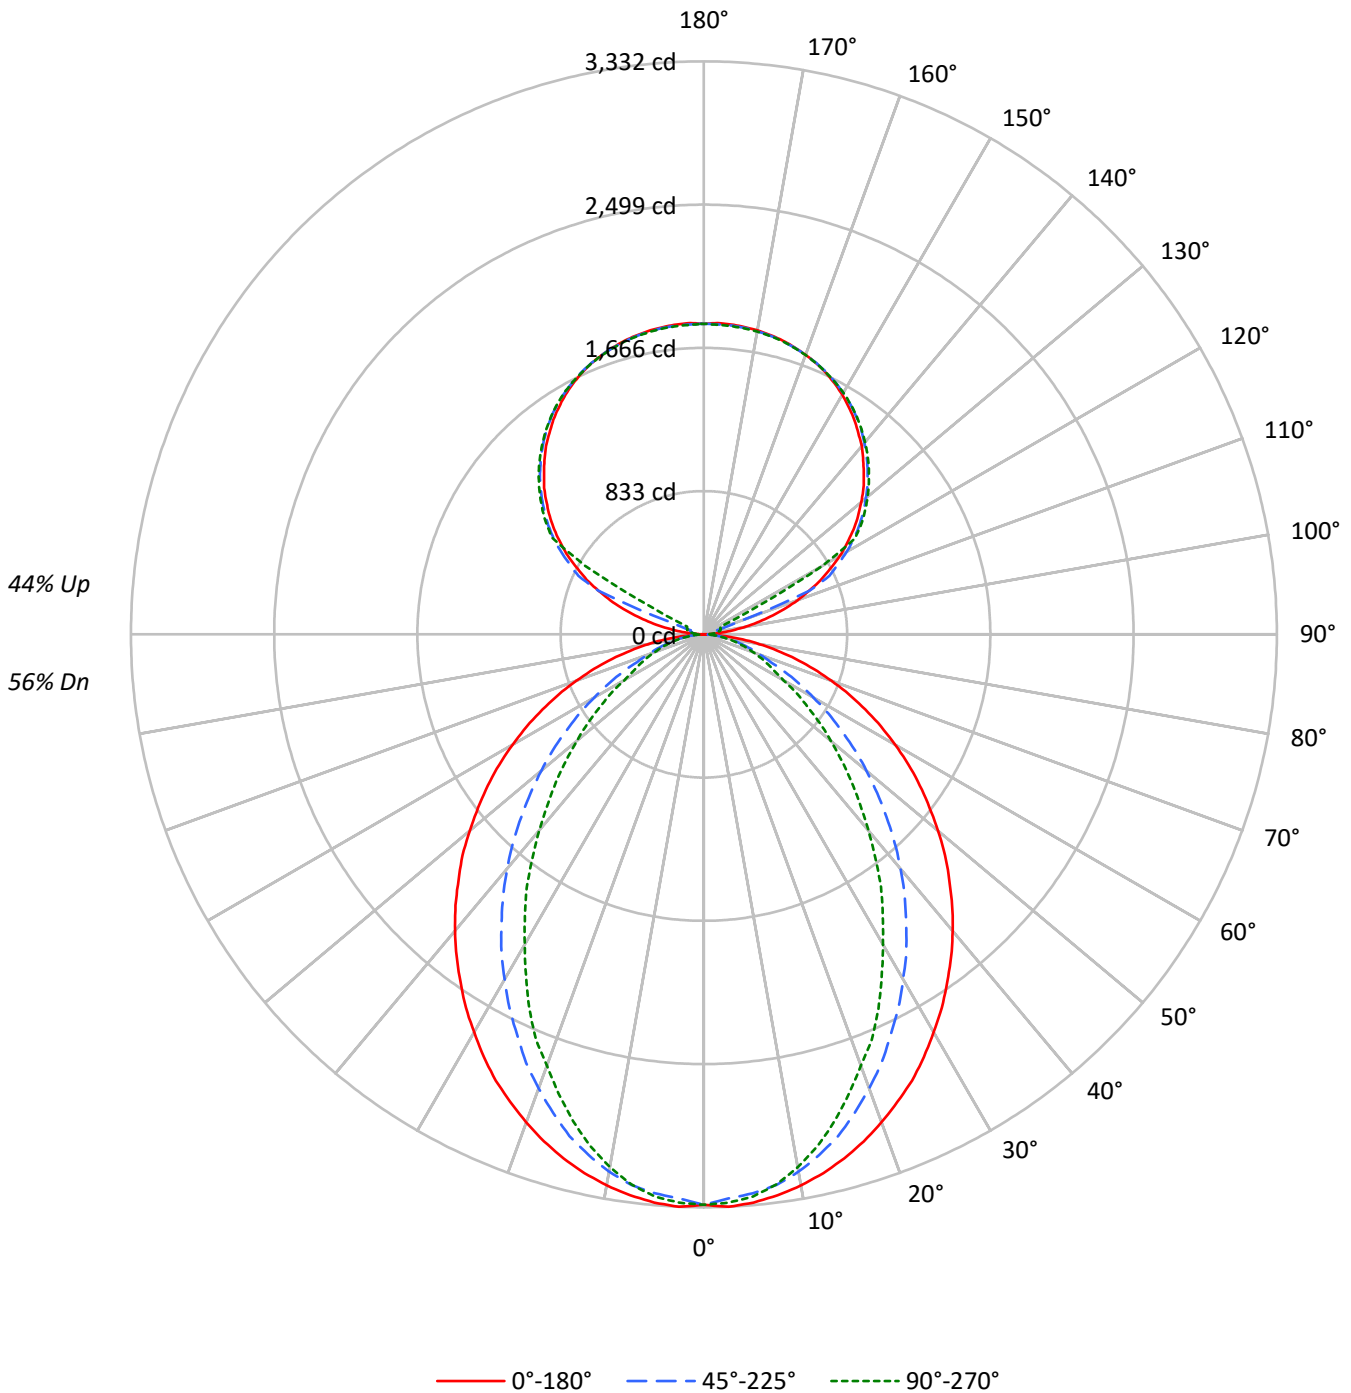



TEST NUMBER: P921773
 CATALOG NUMBER: DFN2DIP-HX3F0-090D060US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56	56	56
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53	49	49	49
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46	42	42	42
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40	36	36	36
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35	31	31	31
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31	27	27	27
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27	24	24	24
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24	22	22	22
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22	20	20	20
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20	18	18	18
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18	16	16	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3842	3842	3842
5°	3847	3779	3803
10°	3807	3702	3677
15°	3753	3577	3484
20°	3682	3406	3248
25°	3609	3214	3019
30°	3512	3018	2731
35°	3416	2808	2477
40°	3319	2590	2187
45°	3207	2349	1924
50°	3090	2107	1667
55°	2968	1847	1420
60°	2827	1577	1167
65°	2664	1302	1048
70°	2467	1045	945
75°	2219	916	855
80°	1860	760	735
85°	1270	495	540

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3207 cd/sqm



TEST NUMBER: P921773

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US940-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	310.9	2.6
10°-20°	853.4	7.0
20°-30°	1198.1	9.9
30°-40°	1306.0	10.8
40°-50°	1200.4	9.9
50°-60°	942.7	7.8
60°-70°	613.6	5.1
70°-80°	315.9	2.6
80°-90°	83.8	0.7
90°-100°	59.5	0.5
100°-110°	222.0	1.8
110°-120°	588.7	4.9
120°-130°	976.3	8.1
130°-140°	1037.1	8.6
140°-150°	963.9	8.0
150°-160°	774.9	6.4
160°-170°	499.3	4.1
170°-180°	171.9	1.4
0°-30°	2362.4	19.5
0°-40°	3668.4	30.3
0°-60°	5811.5	48.0
0°-90°	6824.8	56.3
90°-120°	870.2	7.2
90°-150°	3847.4	31.7
90°-180°	5294.0	43.7
0°-180°	12118.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3317	3317	3317	3317	3317	
5°	3317	3302	3263	3290	3281	315
15°	3155	3122	3020	2963	2933	889
25°	2864	2768	2570	2446	2401	1317
35°	2468	2314	2050	1861	1795	1544
45°	2017	1816	1501	1288	1216	1558
55°	1534	1300	975	796	738	1371
65°	1036	792	522	420	411	1027
75°	552	342	240	219	216	584
85°	129	66	57	57	57	148
90°	1	16	26	33	35	11
95°	85	42	51	58	56	101
105°	397	436	80	94	99	424
115°	751	774	806	201	107	740
125°	1062	1079	1104	1113	1117	947
135°	1314	1335	1347	1360	1358	1015
145°	1525	1523	1546	1555	1548	954
155°	1679	1667	1683	1691	1680	774
165°	1769	1761	1765	1774	1765	500
175°	1810	1800	1803	1812	1799	172
180°	1806	1806	1806	1806	1806	



TEST NUMBER: P921773

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US940-RLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3316.9	3316.9	3316.9	3316.9	3316.9
2.5°	3331.9	3316.9	3283.7	3314.0	3308.0
5°	3316.9	3301.9	3262.8	3289.8	3280.9
7.5°	3289.8	3272.0	3230.0	3241.7	3226.7
10°	3253.9	3232.8	3173.0	3163.7	3145.9
12.5°	3208.9	3181.9	3100.7	3082.8	3049.6
15°	3154.8	3121.7	3019.8	2962.7	2932.8
17.5°	3091.7	3043.7	2917.5	2851.6	2803.5
20°	3019.8	2959.6	2809.5	2734.7	2668.4
22.5°	2941.8	2872.6	2698.4	2596.5	2551.6
25°	2863.7	2767.5	2569.5	2446.5	2401.3
27.5°	2770.7	2668.4	2449.4	2308.3	2239.2
30°	2671.7	2557.3	2317.2	2164.4	2083.1
32.5°	2575.4	2437.2	2191.4	2011.2	1936.0
35°	2467.5	2314.3	2050.3	1861.2	1794.9
37.5°	2362.4	2197.2	1918.2	1710.8	1636.0
40°	2251.3	2071.4	1779.9	1566.9	1488.9
42.5°	2137.3	1945.3	1642.0	1419.8	1344.9
45°	2017.2	1816.0	1500.9	1287.5	1215.6
47.5°	1903.2	1690.1	1365.9	1152.5	1086.6
50°	1777.1	1564.0	1233.8	1026.4	963.7
52.5°	1653.9	1428.7	1107.7	909.5	852.6
55°	1533.7	1299.7	975.4	795.6	738.5
57.5°	1410.9	1170.7	858.6	690.5	642.4
60°	1284.7	1044.5	735.4	582.5	534.4
62.5°	1161.8	921.7	630.3	486.3	462.4
65°	1035.6	792.4	522.3	420.4	411.2
67.5°	915.6	672.3	420.4	369.1	360.2
70°	789.5	555.4	348.1	318.2	306.0
72.5°	669.4	447.1	291.1	267.2	261.2
75°	552.2	342.1	240.1	219.1	216.2
77.5°	435.3	243.0	189.1	177.1	171.0
80°	327.1	174.2	143.9	132.2	132.2
82.5°	228.0	117.2	99.1	93.0	93.0
85°	128.9	65.9	57.0	57.0	57.0
87.5°	48.1	23.9	23.9	21.0	21.0
90°	1.2	15.7	26.0	32.7	35.2
92.5°	32.7	27.5	31.3	34.0	35.2
95°	84.9	41.7	50.9	57.6	56.2
97.5°	152.8	45.7	66.5	70.6	71.9
100°	231.3	52.3	74.5	84.9	87.5
102.5°	317.4	315.0	77.1	91.4	95.4
105°	397.2	436.4	79.7	94.0	99.3
107.5°	490.0	522.5	82.4	96.7	101.9
110°	578.9	606.2	228.7	98.1	103.2



TEST NUMBER: P921773

CATALOG NUMBER: DFN2DIP-HX3F0-090D060US940-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	662.5	685.9	663.7	100.5	104.6
115°	751.3	773.5	806.2	201.3	107.2
117.5°	828.3	854.4	876.7	689.8	347.5
120°	914.6	934.2	957.8	973.4	797.0
122.5°	987.7	1008.6	1034.8	1042.6	1044.0
125°	1062.2	1079.2	1104.0	1113.2	1117.0
127.5°	1130.2	1148.4	1168.1	1181.2	1182.4
130°	1194.2	1215.1	1229.4	1243.8	1242.6
132.5°	1259.5	1276.6	1290.8	1302.6	1301.4
135°	1314.5	1335.4	1347.0	1360.2	1357.5
137.5°	1371.8	1387.5	1400.7	1413.7	1409.9
140°	1428.0	1438.6	1452.9	1464.6	1458.1
142.5°	1475.2	1484.3	1501.3	1511.6	1505.1
145°	1524.8	1523.4	1545.6	1554.8	1548.3
147.5°	1567.8	1563.9	1586.1	1592.6	1587.5
150°	1609.7	1600.5	1621.5	1629.2	1622.7
152.5°	1644.9	1634.5	1654.0	1662.0	1652.8
155°	1678.9	1667.2	1682.9	1690.7	1680.2
157.5°	1706.4	1695.9	1707.7	1716.9	1706.4
160°	1729.9	1722.0	1729.9	1737.7	1728.6
162.5°	1750.7	1742.9	1749.4	1758.6	1746.9
165°	1769.1	1761.3	1765.1	1774.3	1765.1
167.5°	1783.4	1775.6	1779.6	1788.8	1776.9
170°	1795.3	1787.3	1790.0	1799.1	1787.3
172.5°	1803.0	1795.3	1797.9	1807.1	1795.3
175°	1809.5	1800.4	1803.0	1812.1	1799.1
177.5°	1812.1	1803.0	1804.4	1813.6	1801.8
180°	1805.6	1805.6	1805.6	1805.6	1805.6



TEST NUMBER: P921773
 CATALOG NUMBER: DFN2DIP-HX3F0-090D060US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.35	13.24	13.26	14.16	15.34	8.33	9.21	9.24	10.13	11.32
	3H	14.02	14.82	14.95	15.75	16.95	9.52	10.31	10.44	11.24	12.44
	4H	14.63	15.38	15.57	16.31	17.53	9.97	10.71	10.90	11.65	12.86
	6H	15.05	15.74	15.99	16.68	17.91	10.29	10.97	11.23	11.92	13.14
	8H	15.17	15.83	16.13	16.79	18.01	10.38	11.03	11.33	11.99	13.21
	12H	15.23	15.86	16.19	16.81	18.06	10.42	11.04	11.38	11.99	13.24
4H	2H	12.37	13.12	13.32	14.06	15.27	8.93	9.67	9.87	10.61	11.82
	3H	14.20	14.82	15.15	15.79	17.02	10.27	10.90	11.23	11.86	13.09
	4H	14.89	15.45	15.85	16.42	17.67	10.82	11.39	11.78	12.35	13.60
	6H	15.40	15.89	16.37	16.87	18.12	11.24	11.73	12.21	12.71	13.96
	8H	15.57	16.03	16.55	17.00	18.27	11.37	11.82	12.34	12.80	14.07
	12H	15.66	16.07	16.66	17.07	18.34	11.43	11.84	12.42	12.84	14.11
8H	4H	14.86	15.31	15.83	16.29	17.56	11.10	11.56	12.08	12.53	13.80
	6H	15.42	15.79	16.42	16.81	18.08	11.61	11.99	12.61	13.01	14.28
	8H	15.63	15.96	16.64	16.97	18.25	11.80	12.13	12.81	13.14	14.43
	12H	15.77	16.06	16.78	17.06	18.39	11.92	12.21	12.93	13.21	14.54
12H	4H	14.81	15.22	15.81	16.22	17.49	11.11	11.52	12.10	12.51	13.78
	6H	15.39	15.73	16.40	16.73	18.02	11.66	11.99	12.67	13.00	14.29
	8H	15.61	15.90	16.62	16.90	18.24	11.87	12.16	12.88	13.16	14.49