

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921899

Luminaire Tested: DFN2DIP-HX4F0-100D080US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921899
REPORT IS A COMBINATION OF REPORTS P899384 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-100D080US940-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13892.8 lumens
Efficiency: N/A
Efficacy: 96.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 144.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921899
CATALOG NUMBER: DFN2DIP-HX4F0-100D080US940-RLFL

Luminous Intensity Polar Plot

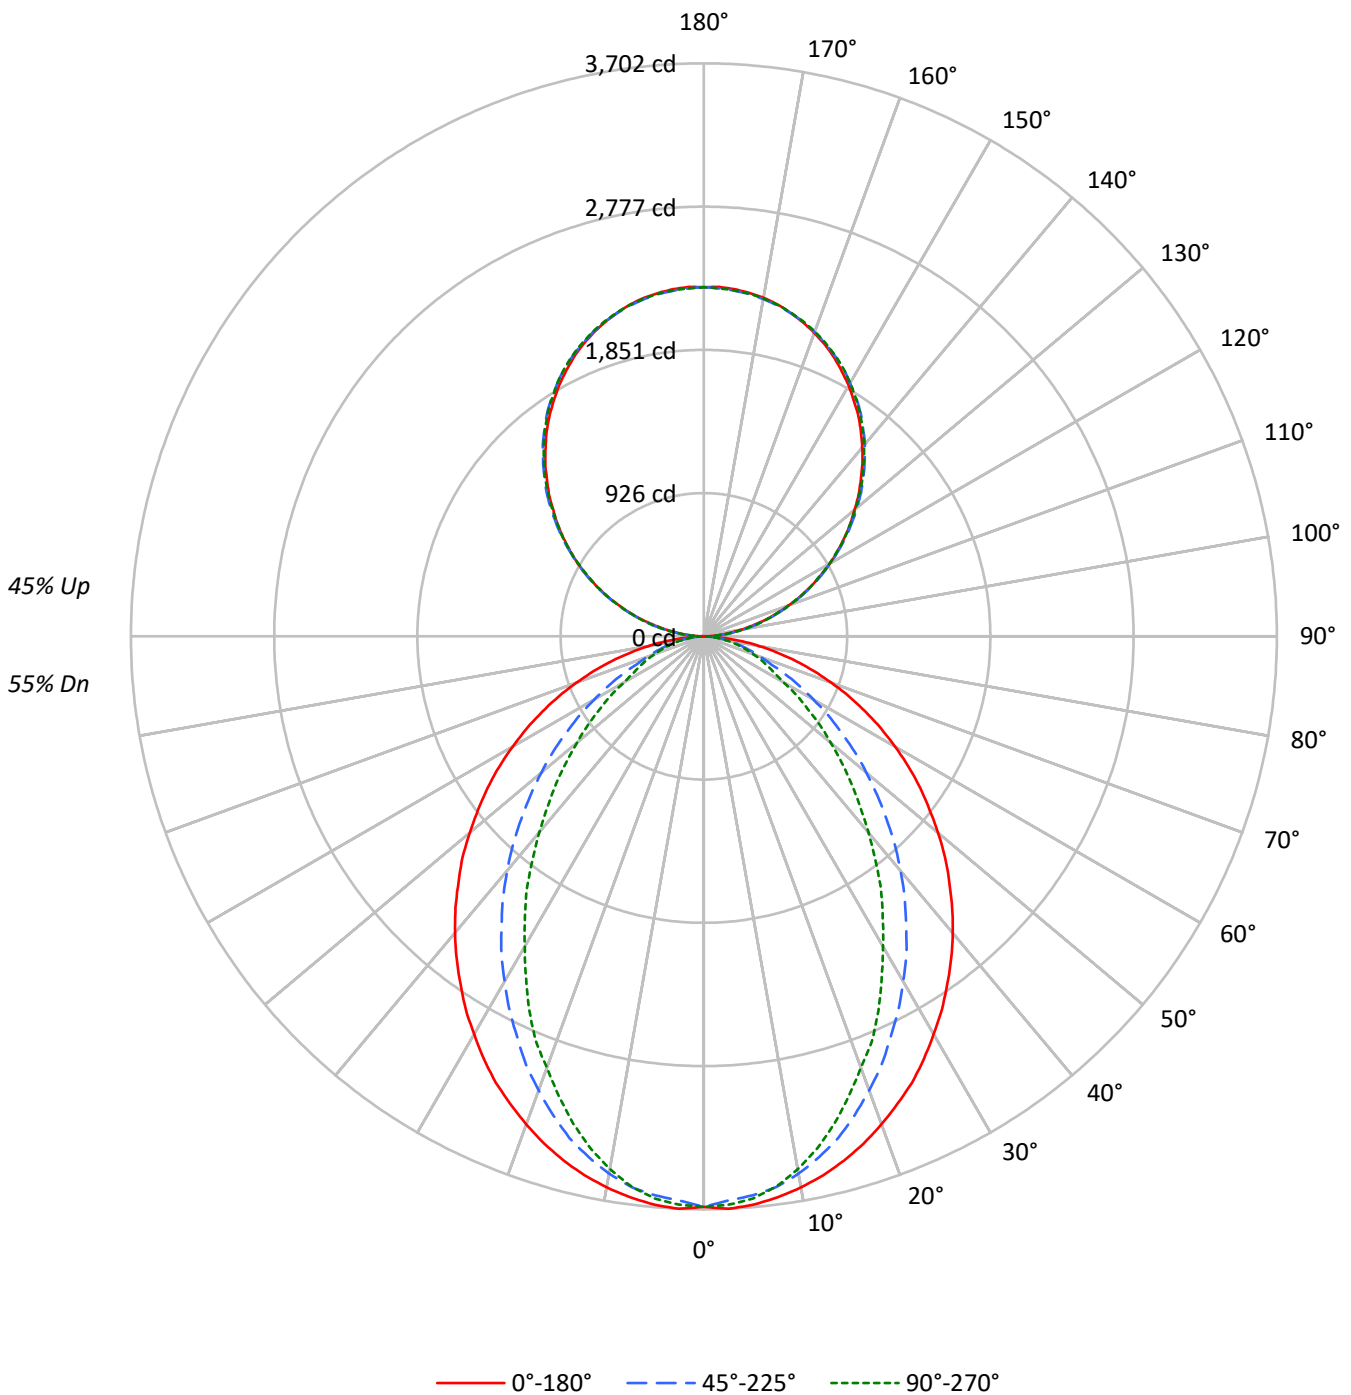



TEST NUMBER: P921899

CATALOG NUMBER: DFN2DIP-HX4F0-100D080US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	60	60	60	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	54	53	52	47
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	43	41	39	35
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	27	24	21	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2740	2740	2740
5°	2745	2697	2714
10°	2718	2644	2626
15°	2681	2557	2490
20°	2631	2437	2322
25°	2581	2302	2161
30°	2513	2164	1955
35°	2447	2015	1775
40°	2379	1861	1569
45°	2301	1691	1381
50°	2219	1518	1198
55°	2135	1334	1023
60°	2036	1141	842
65°	1924	945	758
70°	1787	763	686
75°	1615	673	624
80°	1367	566	542
85°	955	379	408

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2301 cd/sqm



TEST NUMBER: P921899

CATALOG NUMBER: DFN2DIP-HX4F0-100D080US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	345.4	2.5
10°-20°	948.2	6.8
20°-30°	1331.2	9.6
30°-40°	1451.1	10.4
40°-50°	1333.8	9.6
50°-60°	1047.4	7.5
60°-70°	681.8	4.9
70°-80°	351.0	2.5
80°-90°	96.0	0.7
90°-100°	139.6	1.0
100°-110°	443.6	3.2
110°-120°	759.1	5.5
120°-130°	998.3	7.2
130°-140°	1120.6	8.1
140°-150°	1098.9	7.9
150°-160°	921.8	6.6
160°-170°	611.3	4.4
170°-180°	213.7	1.5
0°-30°	2624.8	18.9
0°-40°	4076.0	29.3
0°-60°	6457.2	46.5
0°-90°	7585.9	54.6
90°-120°	1342.3	9.7
90°-150°	4560.1	32.8
90°-180°	6307.0	45.4
0°-180°	13892.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3685	3685	3685	3685	3685	
5°	3685	3669	3625	3655	3645	349
15°	3505	3468	3355	3292	3259	988
25°	3182	3075	2855	2718	2668	1463
35°	2742	2572	2278	2068	1994	1716
45°	2241	2018	1668	1431	1351	1731
55°	1704	1444	1084	884	821	1523
65°	1151	880	580	467	457	1141
75°	614	380	267	243	240	649
85°	143	73	63	63	63	164
90°	2	24	67	63	65	14
95°	99	118	122	122	118	111
105°	410	415	419	422	422	432
115°	762	773	769	767	762	753
125°	1108	1125	1120	1113	1111	990
135°	1433	1454	1458	1456	1451	1108
145°	1740	1754	1764	1766	1759	1087
155°	1990	1995	2001	2010	2004	916
165°	2164	2162	2162	2176	2166	611
175°	2252	2247	2242	2256	2244	214
180°	2256	2256	2256	2256	2256	



TEST NUMBER: P921899

CATALOG NUMBER: DFN2DIP-HX4F0-100D080US940-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3685.4	3685.4	3685.4	3685.4	3685.4
2.5°	3702.0	3685.4	3648.6	3682.2	3675.5
5°	3685.4	3668.8	3625.2	3655.4	3645.4
7.5°	3655.4	3635.5	3588.8	3601.9	3585.3
10°	3615.4	3592.0	3525.5	3515.2	3495.4
12.5°	3565.5	3535.4	3445.1	3425.3	3388.5
15°	3505.3	3468.5	3355.2	3291.9	3258.7
17.5°	3435.2	3381.8	3241.7	3168.4	3115.0
20°	3355.2	3288.4	3121.7	3038.6	2964.9
22.5°	3268.6	3191.8	2998.2	2885.0	2835.1
25°	3181.9	3075.1	2854.9	2718.3	2668.1
27.5°	3078.5	2964.9	2721.5	2564.7	2488.0
30°	2968.5	2841.4	2574.6	2404.9	2314.6
32.5°	2861.7	2708.0	2434.9	2234.6	2151.1
35°	2741.7	2571.5	2278.1	2068.0	1994.3
37.5°	2624.9	2441.2	2131.3	1900.9	1817.8
40°	2501.4	2301.5	1977.7	1741.0	1654.3
42.5°	2374.7	2161.3	1824.5	1577.5	1494.3
45°	2241.3	2017.7	1667.8	1430.7	1350.7
47.5°	2114.7	1877.9	1517.7	1280.6	1207.4
50°	1974.5	1737.8	1370.8	1140.5	1070.8
52.5°	1837.5	1587.4	1230.7	1010.6	947.3
55°	1704.1	1444.1	1083.9	884.0	820.6
57.5°	1567.6	1300.7	954.0	767.1	713.7
60°	1427.4	1160.7	817.1	647.2	593.8
62.5°	1290.8	1024.0	700.3	540.4	513.8
65°	1150.8	880.4	580.3	467.1	456.8
67.5°	1017.4	747.0	467.1	410.1	400.2
70°	877.2	617.2	386.7	353.5	340.1
72.5°	743.8	496.8	323.4	296.9	290.2
75°	613.6	380.0	266.8	243.4	240.2
77.5°	483.8	270.0	210.2	196.7	190.0
80°	363.4	193.6	160.0	146.9	146.9
82.5°	253.3	130.2	110.0	103.3	103.3
85°	143.3	73.2	63.3	63.3	63.3
87.5°	53.4	26.6	26.6	23.4	23.4
90°	2.1	24.5	66.7	62.6	64.6
92.5°	42.2	57.2	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.3	183.0	190.5	190.5	190.5
100°	241.5	257.1	262.5	262.5	260.5
102.5°	321.7	333.3	340.7	342.8	340.7
105°	409.5	414.9	419.0	422.4	422.4
107.5°	496.5	504.7	504.7	506.0	496.5
110°	580.9	591.7	591.7	591.7	586.3



TEST NUMBER: P921899

CATALOG NUMBER: DFN2DIP-HX4F0-100D080US940-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	672.0	683.6	681.5	676.1	672.0
115°	761.8	772.7	769.3	767.2	761.8
117.5°	850.9	865.9	856.3	850.9	845.4
120°	940.7	955.6	940.7	940.7	934.5
122.5°	1022.3	1041.3	1031.8	1026.4	1022.3
125°	1108.0	1125.0	1119.5	1113.4	1111.4
127.5°	1191.7	1212.7	1205.2	1197.1	1191.7
130°	1269.9	1294.3	1290.9	1286.9	1279.4
132.5°	1357.6	1376.6	1378.0	1368.5	1363.1
135°	1433.1	1454.2	1458.3	1456.3	1450.8
137.5°	1517.4	1534.5	1537.8	1536.5	1528.3
140°	1591.6	1608.6	1618.1	1618.1	1610.6
142.5°	1667.8	1684.8	1690.2	1692.3	1684.8
145°	1739.9	1753.5	1764.3	1766.4	1758.9
147.5°	1804.5	1821.5	1829.6	1833.1	1825.6
150°	1871.2	1882.7	1890.2	1896.3	1890.2
152.5°	1930.3	1941.9	1951.4	1958.9	1951.4
155°	1989.5	1994.9	2001.1	2010.5	2004.5
157.5°	2040.5	2044.6	2048.0	2061.5	2052.1
160°	2086.1	2090.2	2092.2	2103.7	2095.6
162.5°	2128.2	2128.2	2130.3	2143.2	2133.7
165°	2164.3	2162.2	2162.2	2175.9	2166.3
167.5°	2196.9	2190.8	2190.8	2204.4	2194.9
170°	2221.4	2216.0	2213.9	2227.6	2216.0
172.5°	2238.5	2233.0	2231.0	2244.5	2233.0
175°	2252.0	2246.6	2242.5	2256.1	2244.5
177.5°	2259.5	2254.1	2250.0	2261.6	2250.0
180°	2256.1	2256.1	2256.1	2256.1	2256.1



TEST NUMBER: P921899
 CATALOG NUMBER: DFN2DIP-HX4F0-100D080US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.07	11.94	11.99	12.87	14.08	7.04	7.91	7.97	8.85	10.05
	3H	12.75	13.53	13.69	14.47	15.70	8.24	9.01	9.17	9.96	11.19
	4H	13.36	14.10	14.31	15.05	16.29	8.69	9.42	9.64	10.37	11.61
	6H	13.79	14.46	14.75	15.42	16.67	9.01	9.69	9.97	10.65	11.90
	8H	13.91	14.56	14.88	15.53	16.78	9.11	9.75	10.07	10.72	11.97
	12H	13.98	14.59	14.95	15.56	16.83	9.15	9.76	10.12	10.73	12.00
4H	2H	11.09	11.83	12.05	12.78	14.02	7.64	8.38	8.60	9.33	10.57
	3H	12.93	13.54	13.89	14.52	15.77	9.00	9.61	9.96	10.59	11.84
	4H	13.62	14.18	14.59	15.15	16.43	9.55	10.11	10.52	11.08	12.36
	6H	14.14	14.62	15.13	15.62	16.89	9.97	10.45	10.96	11.45	12.73
	8H	14.32	14.76	15.30	15.75	17.05	10.10	10.55	11.09	11.54	12.83
	12H	14.41	14.82	15.42	15.82	17.12	10.17	10.57	11.18	11.58	12.88
8H	4H	13.59	14.04	14.58	15.03	16.32	9.83	10.28	10.82	11.27	12.56
	6H	14.16	14.53	15.17	15.56	16.85	10.35	10.72	11.37	11.76	13.05
	8H	14.38	14.70	15.40	15.72	17.03	10.55	10.87	11.57	11.89	13.20
	12H	14.52	14.81	15.54	15.82	17.17	10.67	10.96	11.69	11.97	13.32
12H	4H	13.55	13.95	14.55	14.96	16.25	9.84	10.24	10.85	11.25	12.55
	6H	14.14	14.46	15.16	15.48	16.79	10.40	10.73	11.43	11.75	13.06
	8H	14.36	14.65	15.38	15.66	17.01	10.62	10.90	11.64	11.92	13.27