

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911110

Luminaire Tested: DFN2DIP-PN2F0-050D060US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911110
REPORT IS A COMBINATION OF REPORTS P899508 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-050D060US850-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10602.1 lumens
Efficiency: N/A
Efficacy: 102.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 103.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911110
CATALOG NUMBER: DFN2DIP-PN2F0-050D060US850-RLLFLL

Luminous Intensity Polar Plot

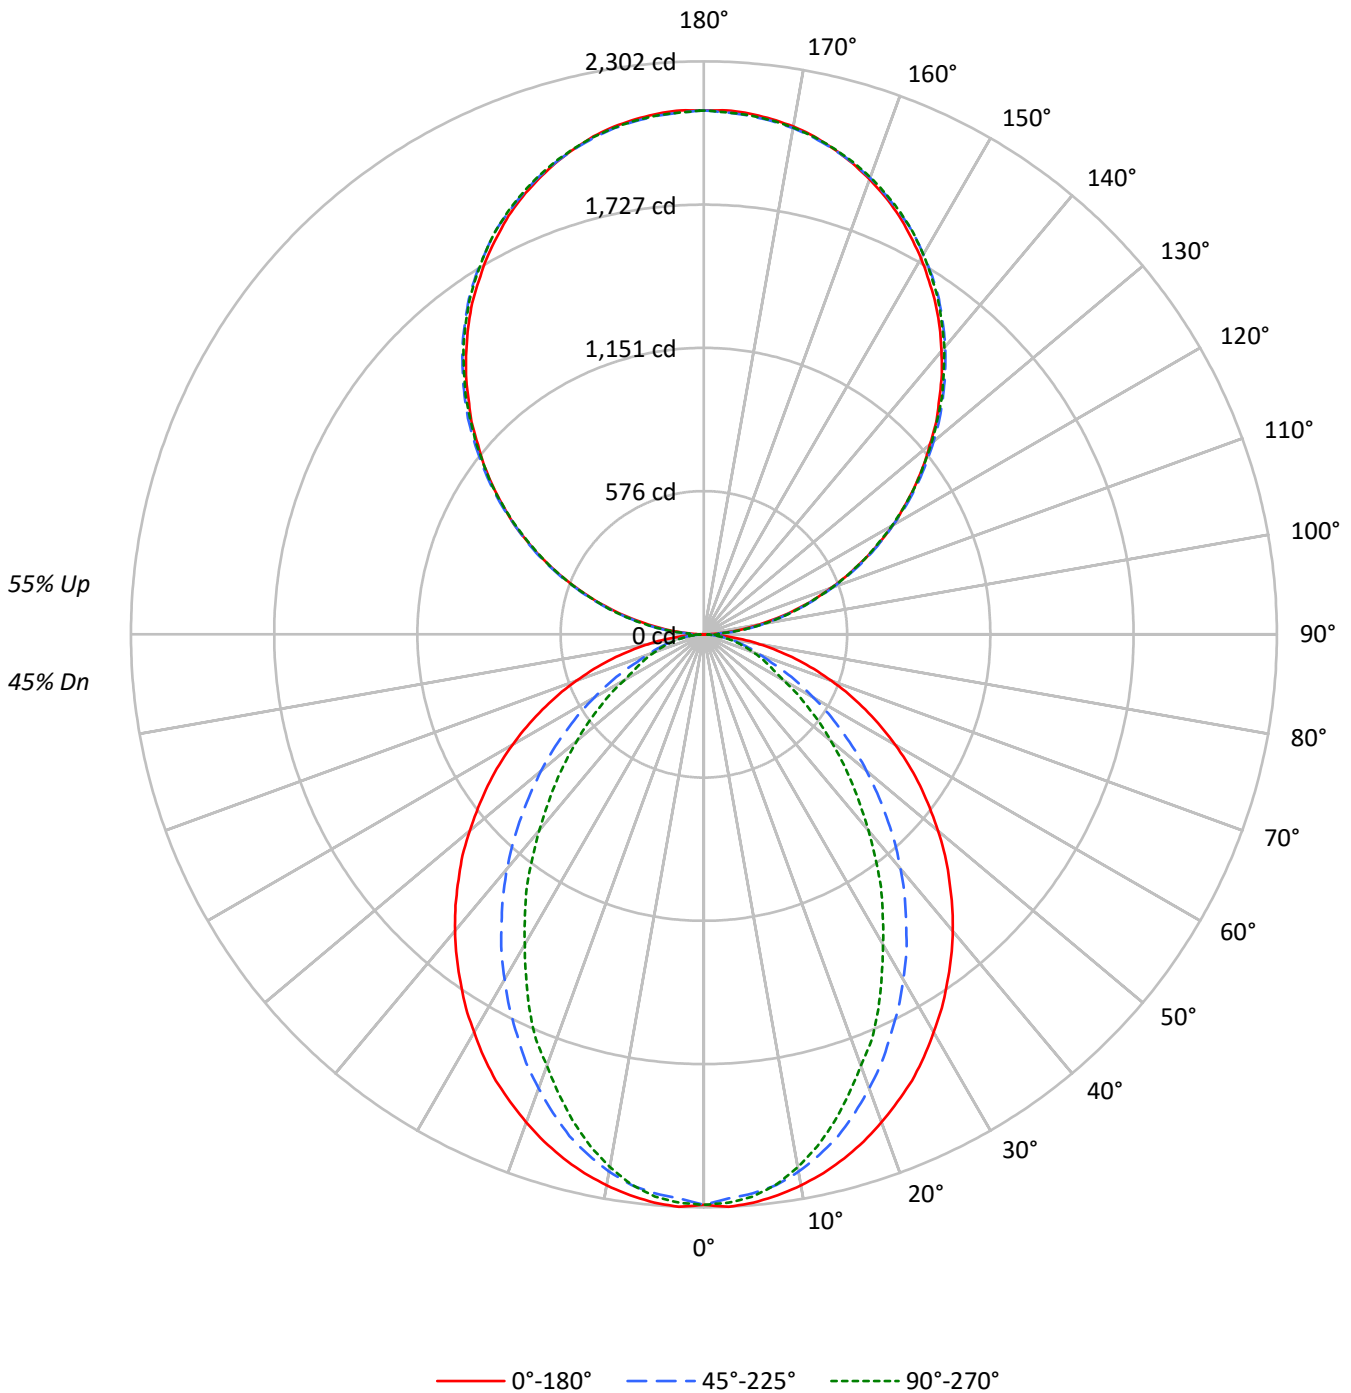



TEST NUMBER: P911110
 CATALOG NUMBER: DFN2DIP-PN2F0-050D060US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45	45	45	45
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	46	45	44	38	38	38	38
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	41	39	38	33	33	33	33
3	81	72	65	59	74	66	60	55	56	51	47	46	43	40	37	34	33	28	28	28	28
4	74	64	56	51	68	59	52	47	50	45	41	41	37	35	33	30	28	25	25	25	25
5	68	57	49	44	63	53	46	41	45	39	35	37	33	30	30	27	25	22	22	22	22
6	63	51	44	38	58	48	41	36	40	35	31	34	30	27	27	24	22	19	19	19	19
7	58	47	39	33	54	43	36	31	37	31	28	31	27	24	25	22	20	17	17	17	17
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16	16	16	16
9	51	39	31	27	46	36	29	25	31	26	22	26	22	19	21	18	16	14	14	14	14
10	47	36	29	24	43	33	27	23	28	23	20	24	20	17	20	17	15	13	13	13	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4964	4964	4964
5°	4963	4874	4909
10°	4907	4768	4742
15°	4831	4600	4488
20°	4734	4373	4180
25°	4634	4121	3882
30°	4503	3863	3506
35°	4374	3586	3177
40°	4242	3301	2800
45°	4090	2987	2459
50°	3932	2671	2127
55°	3767	2333	1808
60°	3574	1983	1481
65°	3352	1628	1325
70°	3084	1297	1189
75°	2745	1122	1067
80°	2258	913	903
85°	1478	567	642

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4090 cd/sqm



TEST NUMBER: P911110

CATALOG NUMBER: DFN2DIP-PN2F0-050D060US850-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	2.0
10°-20°	589.6	5.6
20°-30°	827.8	7.8
30°-40°	902.4	8.5
40°-50°	829.4	7.8
50°-60°	651.3	6.1
60°-70°	424.0	4.0
70°-80°	218.2	2.1
80°-90°	61.7	0.6
90°-100°	130.2	1.2
100°-110°	413.7	3.9
110°-120°	708.0	6.7
120°-130°	931.2	8.8
130°-140°	1045.3	9.9
140°-150°	1025.0	9.7
150°-160°	859.8	8.1
160°-170°	570.2	5.4
170°-180°	199.3	1.9
0°-30°	1632.2	15.4
0°-40°	2534.6	23.9
0°-60°	4015.3	37.9
0°-90°	4719.3	44.5
90°-120°	1252.0	11.8
90°-150°	4253.5	40.1
90°-180°	5883.0	55.5
0°-180°	10602.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2281	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	2	23	62	58	60	10
95°	93	110	114	114	110	103
105°	382	387	391	394	394	403
115°	710	721	718	716	710	703
125°	1034	1049	1044	1039	1037	924
135°	1337	1356	1360	1358	1353	1033
145°	1623	1636	1646	1648	1641	1014
155°	1856	1861	1866	1875	1870	854
165°	2019	2017	2017	2030	2021	569
175°	2101	2096	2092	2104	2094	200
180°	2104	2104	2104	2104	2104	



TEST NUMBER: P911110

CATALOG NUMBER: DFN2DIP-PN2F0-050D060US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2291.7	2291.7	2291.7	2291.7	2291.7
2.5°	2302.1	2291.7	2268.9	2289.8	2285.5
5°	2291.7	2281.4	2254.4	2273.0	2266.9
7.5°	2273.0	2260.7	2231.6	2239.8	2229.4
10°	2248.2	2233.6	2192.3	2185.9	2173.5
12.5°	2217.1	2198.5	2142.4	2130.1	2107.1
15°	2179.7	2156.9	2086.5	2047.1	2026.4
17.5°	2136.2	2103.0	2015.8	1970.2	1937.0
20°	2086.5	2044.9	1941.2	1889.5	1843.7
22.5°	2032.6	1984.8	1864.5	1794.0	1763.0
25°	1978.6	1912.1	1775.3	1690.3	1659.1
27.5°	1914.4	1843.7	1692.3	1594.9	1547.2
30°	1845.9	1767.0	1601.1	1495.4	1439.3
32.5°	1779.5	1684.0	1514.1	1389.6	1337.7
35°	1704.9	1599.1	1416.6	1285.9	1240.2
37.5°	1632.2	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.8	1082.6	1028.7
42.5°	1476.7	1344.0	1134.5	980.9	929.2
45°	1393.8	1254.7	1037.0	889.6	839.8
47.5°	1314.9	1167.8	943.8	796.4	750.8
50°	1227.9	1080.6	852.5	709.2	665.8
52.5°	1142.7	987.1	765.3	628.5	589.1
55°	1059.8	898.0	673.9	549.6	510.3
57.5°	974.8	808.9	593.2	477.1	443.8
60°	887.6	721.7	508.0	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.5	547.5	360.9	290.4	284.1
67.5°	632.6	464.6	290.4	255.1	248.9
70°	545.5	383.7	240.5	219.8	211.5
72.5°	462.6	309.0	201.2	184.6	180.4
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.8	122.3	118.1
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.2	45.6	39.4	39.4	39.4
87.5°	33.3	16.5	16.5	14.5	14.5
90°	1.9	22.8	62.2	58.3	60.2
92.5°	39.4	53.3	55.2	57.1	57.1
95°	92.6	110.3	113.6	113.6	110.3
97.5°	154.2	170.7	177.7	177.7	177.7
100°	225.2	239.8	244.9	244.9	243.0
102.5°	300.1	310.9	317.8	319.7	317.8
105°	381.9	387.0	390.8	394.0	394.0
107.5°	463.1	470.8	470.8	472.0	463.1
110°	541.9	551.9	551.9	551.9	546.8



TEST NUMBER: P911110

CATALOG NUMBER: DFN2DIP-PN2F0-050D060US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	626.8	637.6	635.7	630.6	626.8
115°	710.5	720.7	717.5	715.6	710.5
117.5°	793.7	807.7	798.7	793.7	788.6
120°	877.4	891.4	877.4	877.4	871.7
122.5°	953.5	971.3	962.4	957.4	953.5
125°	1033.5	1049.3	1044.2	1038.6	1036.7
127.5°	1111.6	1131.2	1124.2	1116.7	1111.6
130°	1184.5	1207.4	1204.2	1200.4	1193.4
132.5°	1266.4	1284.1	1285.3	1276.5	1271.4
135°	1336.8	1356.4	1360.2	1358.3	1353.2
137.5°	1415.4	1431.3	1434.5	1433.2	1425.6
140°	1484.6	1500.5	1509.3	1509.3	1502.4
142.5°	1555.6	1571.5	1576.6	1578.4	1571.5
145°	1622.9	1635.6	1645.8	1647.6	1640.7
147.5°	1683.1	1699.0	1706.6	1709.7	1702.8
150°	1745.3	1756.1	1763.1	1768.7	1763.1
152.5°	1800.5	1811.3	1820.2	1827.2	1820.2
155°	1855.7	1860.8	1866.4	1875.4	1869.7
157.5°	1903.3	1907.1	1910.3	1923.0	1914.1
160°	1945.9	1949.6	1951.5	1962.3	1954.7
162.5°	1985.1	1985.1	1987.0	1999.1	1990.2
165°	2018.7	2016.8	2016.8	2029.6	2020.7
167.5°	2049.2	2043.6	2043.6	2056.2	2047.3
170°	2072.1	2067.0	2065.1	2077.7	2067.0
172.5°	2087.9	2082.8	2080.9	2093.6	2082.8
175°	2100.6	2095.6	2091.7	2104.4	2093.6
177.5°	2107.5	2102.6	2098.7	2109.4	2098.7
180°	2104.4	2104.4	2104.4	2104.4	2104.4



TEST NUMBER: P911110
 CATALOG NUMBER: DFN2DIP-PN2F0-050D060US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.06	12.85	13.07	13.86	15.21	8.03	8.82	9.04	9.83	11.18
	3H	13.71	14.42	14.73	15.44	16.81	9.20	9.90	10.22	10.92	12.30
	4H	14.31	14.97	15.34	16.00	17.38	9.63	10.30	10.67	11.33	12.70
	6H	14.71	15.32	15.75	16.35	17.74	9.94	10.55	10.98	11.58	12.97
	8H	14.83	15.41	15.87	16.46	17.84	10.02	10.60	11.07	11.65	13.03
	12H	14.88	15.43	15.93	16.47	17.88	10.05	10.61	11.10	11.65	13.06
4H	2H	12.07	12.73	13.11	13.76	15.14	8.61	9.27	9.65	10.30	11.68
	3H	13.87	14.42	14.92	15.48	16.87	9.93	10.49	10.98	11.54	12.93
	4H	14.55	15.05	15.60	16.10	17.51	10.47	10.97	11.52	12.02	13.43
	6H	15.04	15.47	16.10	16.54	17.95	10.86	11.30	11.93	12.37	13.78
	8H	15.20	15.61	16.26	16.67	18.09	10.98	11.39	12.04	12.45	13.87
	12H	15.28	15.65	16.36	16.73	18.16	11.04	11.40	12.12	12.48	13.91
8H	4H	14.51	14.91	15.57	15.97	17.40	10.73	11.14	11.79	12.20	13.62
	6H	15.05	15.38	16.13	16.49	17.91	11.22	11.56	12.31	12.66	14.08
	8H	15.25	15.54	16.34	16.63	18.07	11.40	11.70	12.49	12.78	14.22
	12H	15.37	15.63	16.47	16.71	18.20	11.50	11.76	12.60	12.85	14.33
12H	4H	14.45	14.82	15.54	15.90	17.33	10.73	11.10	11.81	12.17	13.60
	6H	15.02	15.32	16.11	16.40	17.84	11.27	11.56	12.36	12.65	14.09
	8H	15.23	15.48	16.32	16.57	18.05	11.46	11.72	12.56	12.80	14.28