

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908526

Luminaire Tested: DFN2DIP-PN3F0-070D050US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908526
REPORT IS A COMBINATION OF REPORTS P899548 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-070D050US840-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10477.3 lumens
Efficiency: N/A
Efficacy: 97.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 107.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908526
CATALOG NUMBER: DFN2DIP-PN3F0-070D050US840-RLFL

Luminous Intensity Polar Plot

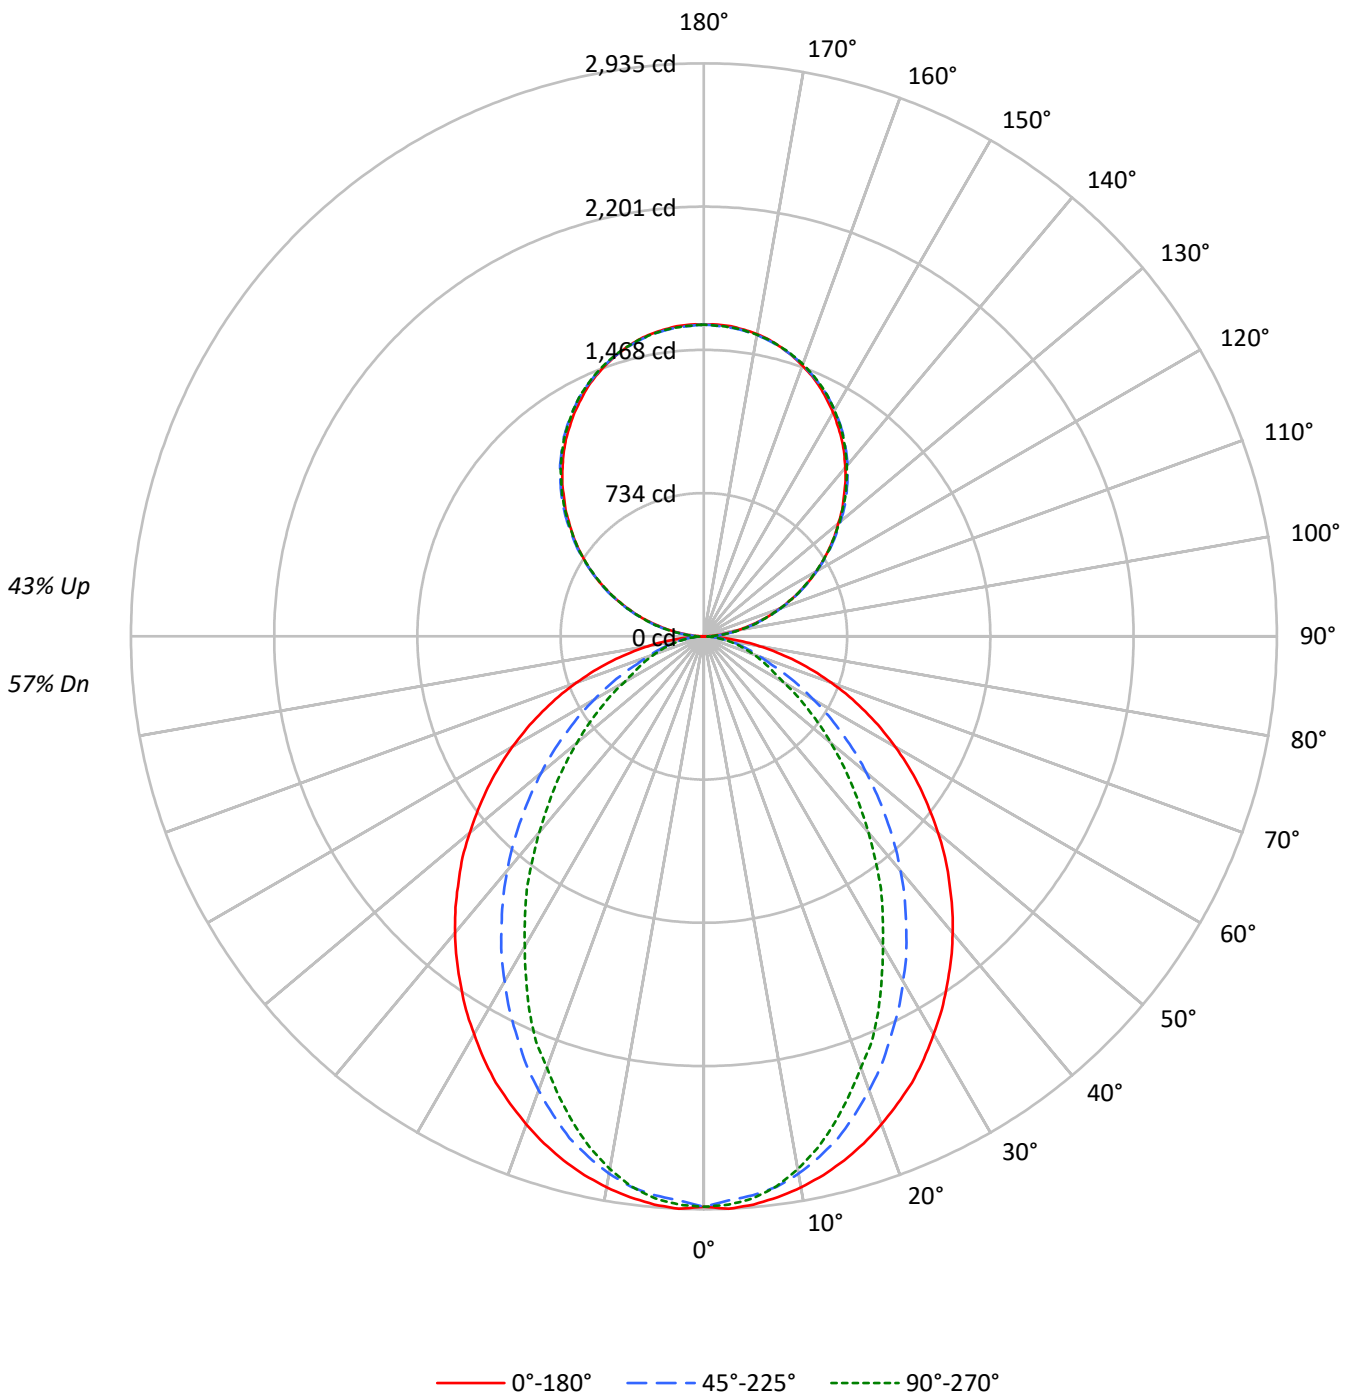



TEST NUMBER: P908526

CATALOG NUMBER: DFN2DIP-PN3F0-070D050US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63	57	57	57
1	100	96	92	89	93	89	86	83	78	75	73	67	65	63	56	55	54	49	49	49
2	92	84	78	73	85	79	74	69	69	65	61	59	56	54	50	48	47	42	42	42
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	42	40	36	36	36
4	77	66	59	53	72	62	56	50	55	49	45	47	43	40	41	38	35	32	32	32
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31	28	28	28
6	66	54	46	40	61	51	43	38	45	39	35	39	34	31	34	30	28	25	25	25
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	27	25	22	22	22
8	57	44	37	32	53	42	35	30	37	32	28	33	28	25	29	25	22	20	20	20
9	53	41	33	28	49	38	32	27	34	29	25	30	26	23	26	23	20	18	18	18
10	49	37	30	26	46	35	29	25	32	26	23	28	24	21	25	21	19	17	17	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3415	3415	3415
5°	3419	3359	3381
10°	3383	3290	3270
15°	3334	3179	3098
20°	3271	3027	2889
25°	3205	2857	2686
30°	3119	2683	2429
35°	3033	2496	2204
40°	2947	2302	1946
45°	2846	2088	1712
50°	2742	1872	1484
55°	2633	1642	1265
60°	2506	1401	1040
65°	2361	1157	934
70°	2184	929	843
75°	1962	814	764
80°	1640	675	658
85°	1114	439	486

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2846 cd/sqm



TEST NUMBER: P908526

CATALOG NUMBER: DFN2DIP-PN3F0-070D050US840-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	273.8	2.6
10°-20°	751.7	7.2
20°-30°	1055.3	10.1
30°-40°	1150.4	11.0
40°-50°	1057.3	10.1
50°-60°	830.4	7.9
60°-70°	540.5	5.2
70°-80°	278.2	2.7
80°-90°	75.6	0.7
90°-100°	98.8	0.9
100°-110°	314.0	3.0
110°-120°	537.3	5.1
120°-130°	706.6	6.7
130°-140°	793.2	7.6
140°-150°	777.8	7.4
150°-160°	652.5	6.2
160°-170°	432.7	4.1
170°-180°	151.2	1.4
0°-30°	2080.9	19.9
0°-40°	3231.2	30.8
0°-60°	5118.9	48.9
0°-90°	6013.2	57.4
90°-120°	950.1	9.1
90°-150°	3227.7	30.8
90°-180°	4464.0	42.6
0°-180°	10477.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2922	2922	2922	2922	2922	
5°	2922	2908	2874	2898	2890	277
15°	2779	2750	2660	2610	2583	783
25°	2522	2438	2263	2155	2115	1160
35°	2173	2038	1806	1639	1581	1360
45°	1777	1600	1322	1134	1071	1372
55°	1351	1145	859	701	651	1207
65°	912	698	460	370	362	904
75°	486	301	212	193	190	515
85°	114	58	50	50	50	130
90°	1	17	47	44	46	10
95°	70	84	86	86	84	78
105°	290	294	297	299	299	306
115°	539	547	544	543	539	533
125°	784	796	792	788	787	701
135°	1014	1029	1032	1031	1027	784
145°	1232	1241	1249	1250	1245	769
155°	1408	1412	1416	1423	1419	648
165°	1532	1530	1530	1540	1533	432
175°	1594	1590	1587	1597	1589	151
180°	1597	1597	1597	1597	1597	



TEST NUMBER: P908526

CATALOG NUMBER: DFN2DIP-PN3F0-070D050US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2921.6	2921.6	2921.6	2921.6	2921.6
2.5°	2934.8	2921.6	2892.5	2919.1	2913.8
5°	2921.6	2908.4	2874.0	2897.8	2889.9
7.5°	2897.8	2882.1	2845.1	2855.4	2842.3
10°	2866.1	2847.6	2794.8	2786.7	2771.0
12.5°	2826.5	2802.7	2731.2	2715.4	2686.2
15°	2778.8	2749.7	2659.9	2609.7	2583.3
17.5°	2723.3	2681.0	2569.9	2511.7	2469.4
20°	2659.9	2606.9	2474.8	2408.8	2350.5
22.5°	2591.2	2530.3	2376.8	2287.0	2247.6
25°	2522.4	2437.7	2263.2	2155.0	2115.2
27.5°	2440.5	2350.5	2157.5	2033.3	1972.4
30°	2353.3	2252.6	2041.0	1906.4	1834.9
32.5°	2268.6	2146.9	1930.3	1771.5	1705.3
35°	2173.4	2038.5	1806.0	1639.4	1581.0
37.5°	2080.9	1935.3	1689.6	1506.9	1441.1
40°	1983.0	1824.5	1567.8	1380.2	1311.4
42.5°	1882.6	1713.4	1446.3	1250.5	1184.7
45°	1776.9	1599.5	1322.1	1134.2	1070.8
47.5°	1676.4	1488.7	1203.2	1015.2	957.2
50°	1565.3	1377.7	1086.7	904.1	848.9
52.5°	1456.7	1258.4	975.6	801.1	750.9
55°	1351.0	1144.8	859.2	700.7	650.6
57.5°	1242.7	1031.2	756.3	608.1	565.8
60°	1131.7	920.1	647.7	513.1	470.7
62.5°	1023.3	811.8	555.1	428.4	407.3
65°	912.2	697.9	460.1	370.3	362.1
67.5°	806.5	592.2	370.3	325.1	317.3
70°	695.4	489.2	306.6	280.2	269.5
72.5°	589.7	393.8	256.4	235.4	230.0
75°	486.5	301.2	211.5	193.0	190.5
77.5°	383.4	214.0	166.6	155.9	150.7
80°	288.1	153.4	126.8	116.4	116.4
82.5°	200.9	103.2	87.3	81.9	81.9
85°	113.6	58.1	50.2	50.2	50.2
87.5°	42.3	21.0	21.0	18.5	18.5
90°	1.4	17.4	47.2	44.3	45.7
92.5°	29.9	40.4	41.9	43.3	43.3
95°	70.3	83.8	86.1	86.1	83.8
97.5°	116.9	129.5	134.8	134.8	134.8
100°	170.9	182.0	185.8	185.8	184.4
102.5°	227.7	235.9	241.2	242.7	241.2
105°	289.8	293.7	296.6	298.9	298.9
107.5°	351.4	357.2	357.2	358.2	351.4
110°	411.1	418.9	418.9	418.9	415.0



TEST NUMBER: P908526

CATALOG NUMBER: DFN2DIP-PN3F0-070D050US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	475.6	483.8	482.4	478.6	475.6
115°	539.2	546.9	544.5	543.1	539.2
117.5°	602.3	612.9	606.1	602.3	598.4
120°	665.8	676.4	665.8	665.8	661.5
122.5°	723.6	737.1	730.3	726.5	723.6
125°	784.3	796.3	792.4	788.1	786.7
127.5°	843.4	858.4	853.1	847.3	843.4
130°	898.9	916.2	913.7	910.9	905.5
132.5°	961.0	974.4	975.4	968.7	964.8
135°	1014.4	1029.3	1032.2	1030.8	1026.9
137.5°	1074.1	1086.1	1088.5	1087.5	1081.8
140°	1126.5	1138.6	1145.3	1145.3	1140.0
142.5°	1180.4	1192.6	1196.4	1197.8	1192.6
145°	1231.5	1241.1	1248.8	1250.3	1245.0
147.5°	1277.3	1289.3	1295.1	1297.5	1292.1
150°	1324.4	1332.6	1337.9	1342.2	1337.9
152.5°	1366.3	1374.5	1381.2	1386.5	1381.2
155°	1408.2	1412.0	1416.3	1423.1	1418.8
157.5°	1444.3	1447.1	1449.6	1459.3	1452.5
160°	1476.5	1479.5	1480.9	1489.0	1483.3
162.5°	1506.4	1506.4	1507.8	1517.0	1510.3
165°	1532.0	1530.5	1530.5	1540.1	1533.4
167.5°	1555.0	1550.6	1550.6	1560.3	1553.6
170°	1572.4	1568.5	1567.1	1576.7	1568.5
172.5°	1584.4	1580.5	1579.1	1588.7	1580.5
175°	1594.1	1590.1	1587.3	1596.9	1588.7
177.5°	1599.3	1595.5	1592.6	1600.7	1592.6
180°	1596.9	1596.9	1596.9	1596.9	1596.9



TEST NUMBER: P908526
 CATALOG NUMBER: DFN2DIP-PN3F0-070D050US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.04	12.93	12.94	13.85	15.01	8.00	8.90	8.90	9.81	10.98
	3H	13.71	14.51	14.63	15.44	16.63	9.19	9.99	10.10	10.91	12.10
	4H	14.32	15.08	15.25	16.01	17.20	9.64	10.40	10.57	11.32	12.52
	6H	14.74	15.44	15.68	16.37	17.58	9.96	10.65	10.90	11.59	12.80
	8H	14.87	15.53	15.81	16.48	17.69	10.05	10.71	10.99	11.66	12.87
	12H	14.93	15.56	15.88	16.50	17.74	10.09	10.72	11.04	11.67	12.90
4H	2H	12.06	12.82	12.99	13.75	14.94	8.60	9.36	9.53	10.29	11.49
	3H	13.89	14.52	14.83	15.48	16.69	9.95	10.58	10.89	11.54	12.75
	4H	14.58	15.15	15.53	16.11	17.34	10.50	11.07	11.45	12.02	13.26
	6H	15.09	15.59	16.06	16.56	17.80	10.91	11.41	11.88	12.38	13.62
	8H	15.27	15.73	16.23	16.70	17.95	11.04	11.50	12.01	12.47	13.72
	12H	15.36	15.77	16.34	16.76	18.02	11.11	11.52	12.09	12.51	13.76
8H	4H	14.55	15.01	15.52	15.98	17.23	10.78	11.24	11.75	12.21	13.46
	6H	15.11	15.49	16.10	16.50	17.76	11.29	11.67	12.28	12.68	13.93
	8H	15.33	15.66	16.33	16.66	17.93	11.48	11.81	12.48	12.81	14.08
	12H	15.46	15.76	16.47	16.75	18.07	11.60	11.89	12.60	12.88	14.20
12H	4H	14.51	14.92	15.49	15.91	17.16	10.79	11.20	11.77	12.19	13.44
	6H	15.09	15.42	16.09	16.42	17.69	11.34	11.68	12.34	12.68	13.94
	8H	15.31	15.60	16.31	16.60	17.91	11.55	11.84	12.55	12.84	14.15