

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908558

Luminaire Tested: DFN2DIP-PN3F0-080D060US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908558
REPORT IS A COMBINATION OF REPORTS P899564 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-080D060US840-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12229.5 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 125.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908558
CATALOG NUMBER: DFN2DIP-PN3F0-080D060US840-RLLFLL

Luminous Intensity Polar Plot

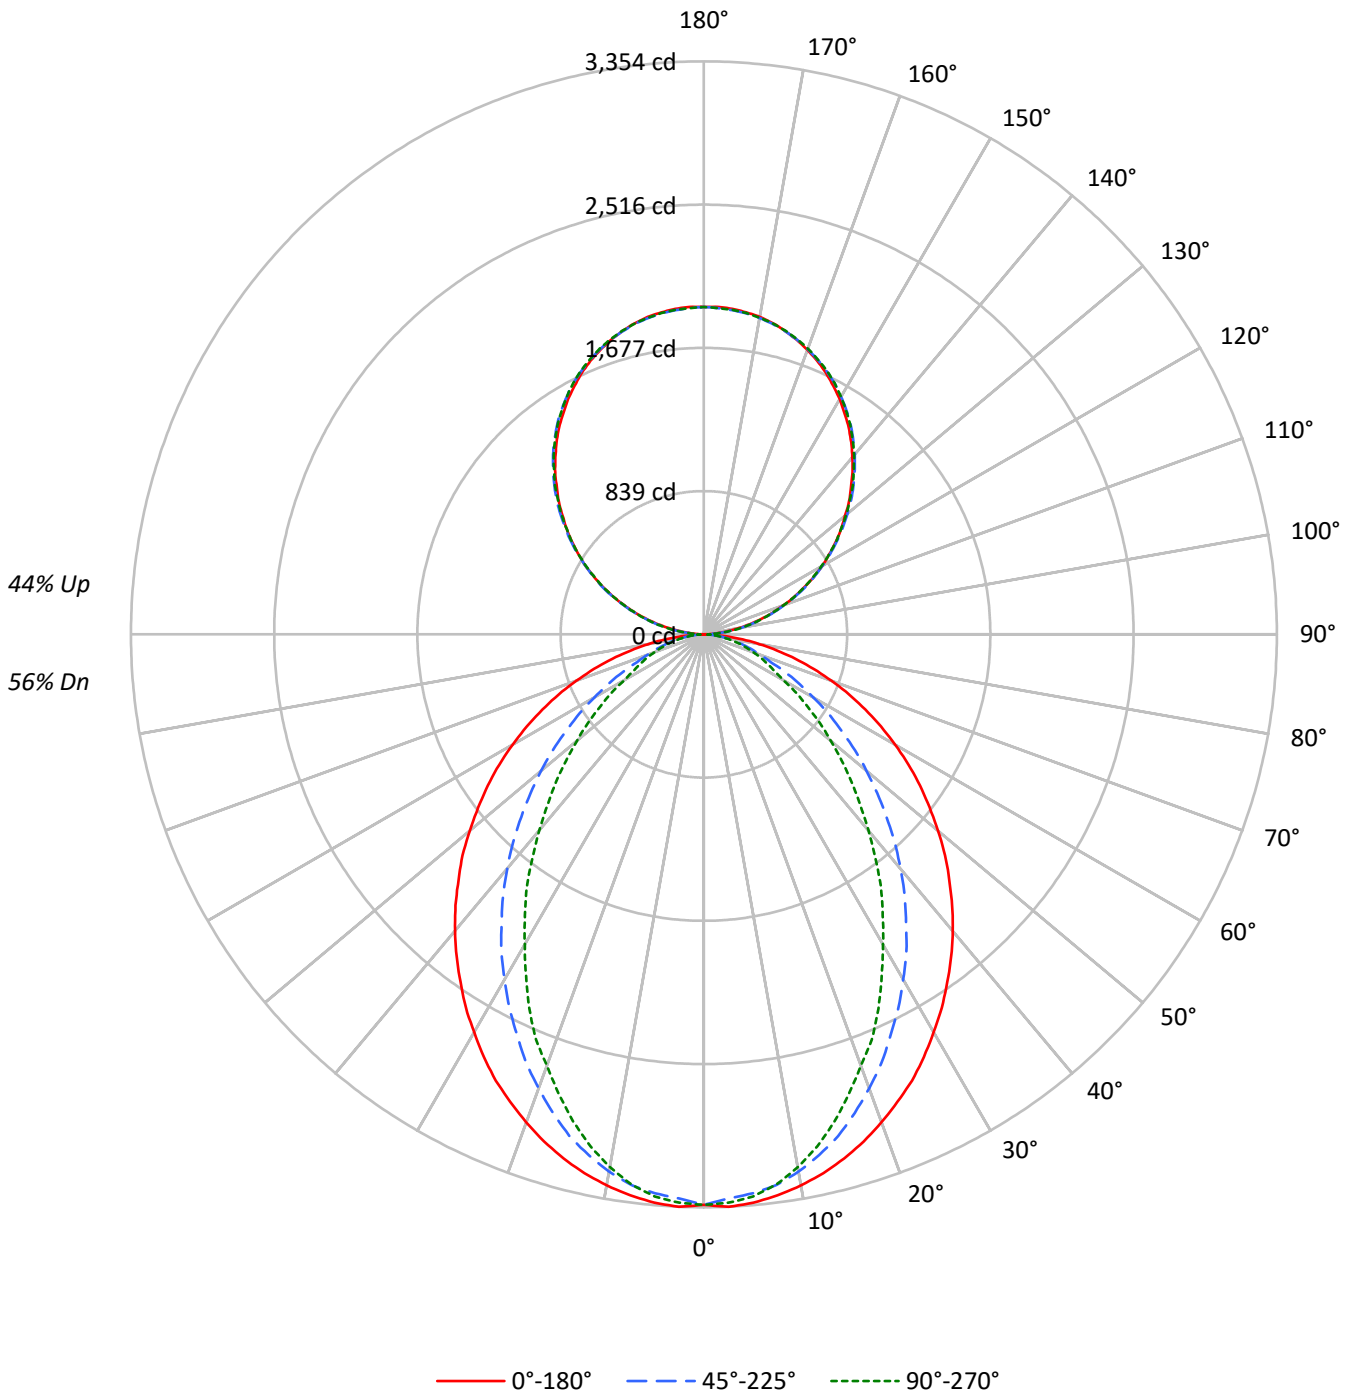



TEST NUMBER: P908558

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56	56	56	56
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	55	54	53	48	48	48	48
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	49	47	46	41	41	41	41
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40	36	36	36	36
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35	31	31	31	31
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	30	27	27	27	27
6	65	53	46	40	61	50	43	38	44	38	34	38	34	31	33	30	27	24	24	24	24
7	61	48	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24	22	22	22	22
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22	20	20	20	20
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20	18	18	18	18
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18	16	16	16	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3903	3903	3903
5°	3907	3839	3864
10°	3866	3761	3737
15°	3811	3634	3541
20°	3738	3460	3301
25°	3663	3265	3070
30°	3564	3066	2776
35°	3467	2852	2519
40°	3368	2631	2224
45°	3252	2387	1957
50°	3133	2140	1696
55°	3009	1876	1446
60°	2864	1601	1188
65°	2698	1322	1067
70°	2496	1062	964
75°	2242	930	873
80°	1874	771	751
85°	1274	502	555

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3252 cd/sqm



TEST NUMBER: P908558

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	312.9	2.6
10°-20°	859.1	7.0
20°-30°	1206.1	9.9
30°-40°	1314.7	10.8
40°-50°	1208.4	9.9
50°-60°	949.0	7.8
60°-70°	617.7	5.1
70°-80°	318.0	2.6
80°-90°	86.6	0.7
90°-100°	118.6	1.0
100°-110°	376.8	3.1
110°-120°	644.8	5.3
120°-130°	848.0	6.9
130°-140°	951.8	7.8
140°-150°	933.4	7.6
150°-160°	783.0	6.4
160°-170°	519.2	4.2
170°-180°	181.5	1.5
0°-30°	2378.1	19.4
0°-40°	3692.9	30.2
0°-60°	5850.2	47.8
0°-90°	6872.5	56.2
90°-120°	1140.1	9.3
90°-150°	3873.3	31.7
90°-180°	5357.0	43.8
0°-180°	12229.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3339	3339	3339	3339	3339	
5°	3339	3324	3284	3312	3303	317
15°	3176	3142	3040	2982	2952	895
25°	2883	2786	2587	2463	2417	1326
35°	2484	2330	2064	1874	1807	1555
45°	2031	1828	1511	1296	1224	1568
55°	1544	1308	982	801	744	1380
65°	1043	798	526	423	414	1034
75°	556	344	242	221	218	588
85°	130	66	57	57	57	149
90°	2	21	57	53	55	12
95°	84	100	103	103	100	94
105°	348	352	356	359	359	367
115°	647	656	653	652	647	640
125°	941	956	951	946	944	841
135°	1217	1235	1239	1237	1232	941
145°	1478	1489	1499	1500	1494	923
155°	1690	1694	1700	1708	1702	778
165°	1838	1836	1836	1848	1840	519
175°	1913	1908	1905	1916	1906	182
180°	1916	1916	1916	1916	1916	



TEST NUMBER: P908558

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3339.0	3339.0	3339.0	3339.0	3339.0
2.5°	3354.1	3339.0	3305.7	3336.1	3330.0
5°	3339.0	3324.0	3284.5	3311.8	3302.8
7.5°	3311.8	3293.8	3251.5	3263.4	3248.2
10°	3275.5	3254.4	3194.1	3184.8	3166.8
12.5°	3230.4	3203.1	3121.3	3103.3	3070.0
15°	3175.8	3142.5	3039.9	2982.5	2952.3
17.5°	3112.3	3063.9	2937.0	2870.6	2822.2
20°	3039.9	2979.3	2828.3	2753.0	2686.2
22.5°	2961.3	2891.7	2716.4	2613.8	2568.6
25°	2882.8	2786.0	2586.6	2462.9	2417.3
27.5°	2789.1	2686.2	2465.7	2323.7	2254.1
30°	2689.5	2574.3	2332.7	2178.8	2097.0
32.5°	2592.6	2453.6	2206.1	2024.6	1948.9
35°	2484.0	2329.8	2064.0	1873.6	1806.9
37.5°	2378.1	2211.8	1931.0	1722.2	1646.9
40°	2266.3	2085.2	1791.8	1577.3	1498.7
42.5°	2151.5	1958.2	1652.9	1429.3	1353.8
45°	2030.6	1828.1	1511.0	1296.2	1223.8
47.5°	1915.9	1701.4	1375.0	1160.2	1093.9
50°	1788.9	1574.5	1242.0	1033.3	970.1
52.5°	1664.9	1438.1	1115.0	915.6	858.3
55°	1544.0	1308.4	982.0	800.8	743.5
57.5°	1420.3	1178.5	864.3	695.1	646.6
60°	1293.2	1051.6	740.2	586.3	538.0
62.5°	1169.5	927.8	634.5	489.6	465.5
65°	1042.6	797.6	525.7	423.2	413.8
67.5°	921.7	676.8	423.2	371.5	362.6
70°	794.8	559.2	350.4	320.2	308.1
72.5°	673.9	450.1	293.1	269.0	262.9
75°	555.9	344.4	241.8	220.6	217.7
77.5°	438.3	244.6	190.5	178.2	172.2
80°	329.2	175.4	144.9	133.0	133.0
82.5°	229.5	118.0	99.7	93.6	93.6
85°	129.9	66.3	57.4	57.4	57.4
87.5°	48.4	24.0	24.0	21.2	21.2
90°	1.7	20.8	56.7	53.1	54.8
92.5°	35.9	48.6	50.3	52.0	52.0
95°	84.3	100.5	103.4	103.4	100.5
97.5°	140.4	155.4	161.8	161.8	161.8
100°	205.1	218.3	223.0	223.0	221.3
102.5°	273.3	283.1	289.4	291.1	289.4
105°	347.8	352.4	355.9	358.8	358.8
107.5°	421.7	428.7	428.7	429.8	421.7
110°	493.4	502.6	502.6	502.6	498.0



TEST NUMBER: P908558

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	570.8	580.6	578.9	574.2	570.8
115°	647.0	656.3	653.4	651.7	647.0
117.5°	722.8	735.5	727.3	722.8	718.1
120°	799.0	811.7	799.0	799.0	793.8
122.5°	868.3	884.4	876.4	871.8	868.3
125°	941.1	955.5	950.9	945.7	944.0
127.5°	1012.2	1030.1	1023.7	1016.8	1012.2
130°	1078.6	1099.4	1096.5	1093.1	1086.7
132.5°	1153.2	1169.3	1170.4	1162.4	1157.7
135°	1217.3	1235.2	1238.6	1236.9	1232.2
137.5°	1288.9	1303.3	1306.3	1305.0	1298.2
140°	1351.9	1366.3	1374.4	1374.4	1368.1
142.5°	1416.5	1431.0	1435.6	1437.3	1431.0
145°	1477.8	1489.3	1498.6	1500.4	1494.0
147.5°	1532.7	1547.1	1554.1	1556.9	1550.5
150°	1589.3	1599.1	1605.5	1610.6	1605.5
152.5°	1639.5	1649.4	1657.5	1663.9	1657.5
155°	1689.8	1694.5	1699.6	1707.8	1702.5
157.5°	1733.1	1736.7	1739.5	1751.1	1743.0
160°	1771.9	1775.3	1777.1	1786.9	1780.0
162.5°	1807.7	1807.7	1809.4	1820.4	1812.3
165°	1838.3	1836.5	1836.5	1848.2	1840.1
167.5°	1866.0	1860.9	1860.9	1872.4	1864.3
170°	1886.8	1882.2	1880.5	1892.0	1882.2
172.5°	1901.3	1896.6	1894.9	1906.4	1896.6
175°	1912.8	1908.2	1904.7	1916.3	1906.4
177.5°	1919.1	1914.6	1911.1	1920.9	1911.1
180°	1916.3	1916.3	1916.3	1916.3	1916.3



TEST NUMBER: P908558
 CATALOG NUMBER: DFN2DIP-PN3F0-080D060US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.40	13.28	13.31	14.21	15.39	8.36	9.25	9.27	10.17	11.35
	3H	14.07	14.86	15.00	15.80	17.00	9.55	10.34	10.47	11.27	12.48
	4H	14.68	15.43	15.62	16.36	17.58	10.00	10.75	10.94	11.68	12.90
	6H	15.10	15.79	16.05	16.73	17.96	10.32	11.01	11.27	11.95	13.18
	8H	15.23	15.88	16.18	16.84	18.07	10.41	11.06	11.36	12.02	13.25
	12H	15.29	15.91	16.25	16.86	18.11	10.45	11.07	11.41	12.03	13.28
4H	2H	12.42	13.17	13.36	14.11	15.32	8.96	9.71	9.90	10.65	11.86
	3H	14.25	14.87	15.20	15.84	17.07	10.31	10.93	11.26	11.90	13.13
	4H	14.94	15.50	15.90	16.47	17.72	10.86	11.42	11.82	12.38	13.64
	6H	15.45	15.94	16.42	16.92	18.18	11.27	11.76	12.25	12.74	14.00
	8H	15.62	16.08	16.60	17.06	18.33	11.40	11.85	12.37	12.83	14.10
	12H	15.72	16.13	16.71	17.12	18.40	11.46	11.87	12.46	12.87	14.14
8H	4H	14.91	15.36	15.88	16.34	17.61	11.14	11.59	12.11	12.57	13.84
	6H	15.47	15.84	16.47	16.87	18.13	11.65	12.02	12.65	13.05	14.31
	8H	15.68	16.01	16.69	17.02	18.31	11.84	12.17	12.84	13.18	14.46
	12H	15.82	16.11	16.83	17.11	18.44	11.95	12.24	12.96	13.25	14.58
12H	4H	14.86	15.27	15.86	16.27	17.54	11.14	11.55	12.14	12.55	13.82
	6H	15.44	15.78	16.45	16.79	18.07	11.70	12.03	12.71	13.04	14.32
	8H	15.66	15.95	16.67	16.96	18.29	11.90	12.20	12.92	13.20	14.53