

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911212

Luminaire Tested: DFN2DIP-PN3F0-050D090US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911212
REPORT IS A COMBINATION OF REPORTS P899599 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-050D090US850-FLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14322.8 lumens
Efficiency: N/A
Efficacy: 123.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 116.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911212
CATALOG NUMBER: DFN2DIP-PN3F0-050D090US850-FLLFLL

Luminous Intensity Polar Plot

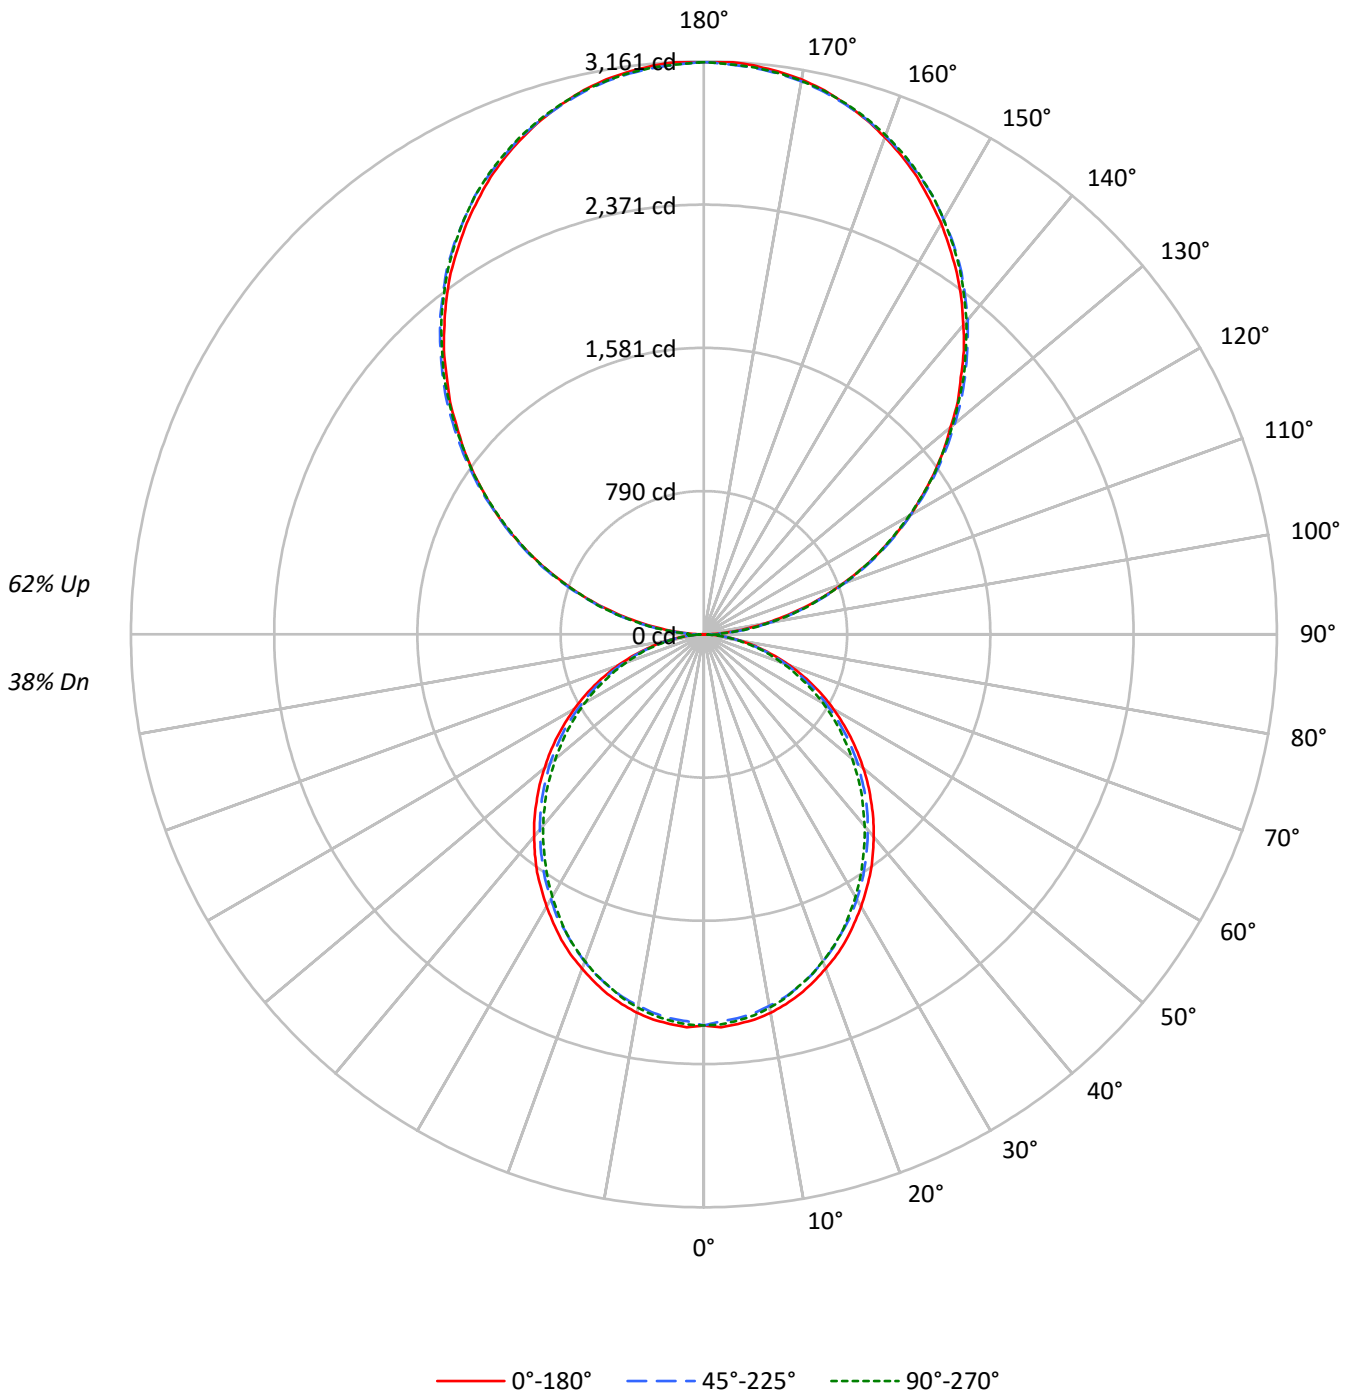



TEST NUMBER: P911212
 CATALOG NUMBER: DFN2DIP-PN3F0-050D090US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	45	45	45	38				38
1	95	91	87	84	86	83	79	77	67	65	63	53	52	50	40	39	38	32				32
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27				27
3	79	70	63	57	71	64	57	52	52	47	44	41	38	35	31	29	27	23				23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20				20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17				17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15				15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13				13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14	12				12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11				11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	15	16	14	12	10				10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2522	2522	2522
5°	2525	2485	2503
10°	2503	2450	2468
15°	2464	2408	2414
20°	2413	2350	2358
25°	2362	2281	2295
30°	2299	2217	2214
35°	2238	2142	2129
40°	2164	2066	2047
45°	2090	1989	1964
50°	2010	1909	1868
55°	1925	1816	1779
60°	1829	1706	1677
65°	1724	1591	1557
70°	1590	1452	1428
75°	1405	1285	1307
80°	1182	1071	1078
85°	833	709	702

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 3127 cd/sqm



TEST NUMBER: P911212

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.1	1.4
10°-20°	571.4	4.0
20°-30°	839.7	5.9
30°-40°	975.2	6.8
40°-50°	974.0	6.8
50°-60°	849.3	5.9
60°-70°	627.9	4.4
70°-80°	355.2	2.5
80°-90°	102.7	0.7
90°-100°	195.3	1.4
100°-110°	620.6	4.3
110°-120°	1062.1	7.4
120°-130°	1396.8	9.8
130°-140°	1567.9	10.9
140°-150°	1537.5	10.7
150°-160°	1289.7	9.0
160°-170°	855.3	6.0
170°-180°	299.0	2.1
0°-30°	1614.1	11.3
0°-40°	2589.4	18.1
0°-60°	4412.7	30.8
0°-90°	5498.5	38.4
90°-120°	1878.1	13.1
90°-150°	6380.2	44.5
90°-180°	8824.0	61.6
0°-180°	14322.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2158	2158	2158	2158	2158	
5°	2158	2150	2126	2143	2139	205
15°	2054	2042	2014	2023	2012	578
25°	1859	1842	1807	1811	1807	855
35°	1604	1583	1550	1537	1527	1001
45°	1305	1290	1259	1237	1228	1007
55°	988	975	950	925	915	883
65°	666	654	633	614	604	659
75°	348	344	334	322	326	372
85°	85	83	81	75	73	95
90°	3	34	93	88	90	14
95°	139	166	170	170	166	155
105°	573	580	586	591	591	605
115°	1066	1081	1076	1074	1066	1054
125°	1550	1574	1566	1558	1555	1385
135°	2005	2035	2040	2038	2030	1550
145°	2434	2453	2468	2471	2461	1521
155°	2784	2791	2800	2813	2805	1281
165°	3028	3025	3025	3044	3031	854
175°	3151	3143	3138	3157	3140	299
180°	3157	3157	3157	3157	3157	



TEST NUMBER: P911212

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2157.6	2157.6	2157.6	2157.6	2157.6
2.5°	2170.1	2159.8	2136.9	2157.6	2153.7
5°	2157.6	2149.5	2126.5	2143.0	2139.2
7.5°	2143.0	2130.7	2107.9	2124.6	2120.4
10°	2120.4	2105.9	2081.0	2097.5	2091.4
12.5°	2089.1	2076.8	2052.0	2062.3	2058.1
15°	2053.9	2041.6	2014.5	2022.9	2012.5
17.5°	2010.3	1998.0	1970.9	1981.2	1970.9
20°	1962.6	1950.3	1921.2	1927.3	1919.2
22.5°	1915.0	1896.3	1869.2	1869.2	1865.0
25°	1858.9	1842.4	1807.1	1811.1	1807.1
27.5°	1796.6	1782.1	1755.2	1749.0	1738.7
30°	1734.5	1717.8	1686.8	1680.6	1672.3
32.5°	1668.0	1655.7	1622.5	1609.9	1601.6
35°	1603.7	1583.1	1549.8	1537.3	1527.0
37.5°	1531.1	1512.5	1479.2	1464.7	1454.3
40°	1456.6	1439.8	1406.5	1388.0	1379.7
42.5°	1383.9	1367.2	1334.1	1313.2	1300.9
45°	1305.1	1290.5	1259.3	1236.6	1228.2
47.5°	1228.2	1213.7	1180.5	1157.6	1145.3
50°	1147.3	1136.9	1107.9	1078.8	1068.4
52.5°	1068.4	1053.9	1027.0	1004.2	989.7
55°	987.7	975.1	950.2	925.3	915.0
57.5°	906.6	896.3	869.2	844.4	836.0
60°	825.7	817.6	788.5	765.5	759.4
62.5°	746.9	732.4	711.6	690.9	682.6
65°	666.1	653.5	632.8	614.2	603.7
67.5°	583.1	572.6	554.1	539.5	531.1
70°	506.3	497.9	479.2	464.7	456.6
72.5°	427.5	419.1	408.8	394.2	388.0
75°	348.4	344.5	333.9	321.6	325.8
77.5°	278.0	269.6	265.5	259.3	253.2
80°	207.6	205.4	201.2	195.1	190.9
82.5°	141.1	141.1	139.1	130.8	130.8
85°	84.9	83.0	81.0	74.6	72.6
87.5°	37.4	33.3	29.1	22.8	20.7
90°	2.9	34.3	93.3	87.5	90.4
92.5°	59.0	80.0	82.8	85.6	85.6
95°	139.0	165.6	170.3	170.3	165.6
97.5°	231.2	256.0	266.5	266.5	266.5
100°	337.8	359.8	367.3	367.3	364.5
102.5°	450.1	466.3	476.8	479.6	476.8
105°	572.9	580.5	586.2	591.0	591.0
107.5°	694.7	706.1	706.1	708.0	694.7
110°	812.7	828.0	828.0	828.0	820.3



TEST NUMBER: P911212

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	940.2	956.4	953.5	946.0	940.2
115°	1065.9	1081.1	1076.3	1073.5	1065.9
117.5°	1190.5	1211.5	1198.2	1190.5	1182.9
120°	1316.2	1337.0	1316.2	1316.2	1307.5
122.5°	1430.3	1457.0	1443.7	1436.0	1430.3
125°	1550.3	1574.0	1566.5	1557.8	1555.0
127.5°	1667.3	1696.8	1686.3	1674.9	1667.3
130°	1776.7	1811.0	1806.2	1800.5	1790.0
132.5°	1899.5	1926.1	1928.0	1914.7	1907.1
135°	2005.1	2034.6	2040.3	2037.5	2029.9
137.5°	2123.1	2146.9	2151.7	2149.8	2138.4
140°	2226.9	2250.6	2263.9	2263.9	2253.5
142.5°	2333.4	2357.2	2364.8	2367.7	2357.2
145°	2434.4	2453.3	2468.5	2471.4	2461.0
147.5°	2524.7	2548.5	2559.9	2564.7	2554.2
150°	2618.0	2634.2	2644.6	2653.2	2644.6
152.5°	2700.7	2716.9	2730.2	2740.8	2730.2
155°	2783.6	2791.1	2799.8	2813.1	2804.6
157.5°	2854.9	2860.7	2865.4	2884.4	2871.1
160°	2918.7	2924.4	2927.3	2943.4	2932.0
162.5°	2977.7	2977.7	2980.5	2998.6	2985.3
165°	3028.1	3025.2	3025.2	3044.3	3031.0
167.5°	3073.8	3065.3	3065.3	3084.2	3070.9
170°	3108.1	3100.4	3097.7	3116.6	3100.4
172.5°	3131.8	3124.3	3121.4	3140.5	3124.3
175°	3150.9	3143.2	3137.6	3156.7	3140.5
177.5°	3161.3	3153.8	3148.0	3164.2	3148.0
180°	3156.7	3156.7	3156.7	3156.7	3156.7



TEST NUMBER: P911212
 CATALOG NUMBER: DFN2DIP-PN3F0-050D090US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.27	10.03	10.32	11.09	12.51	8.83	9.59	9.88	10.65	12.08
	3H	10.91	11.60	11.97	12.66	14.11	10.43	11.12	11.49	12.18	13.63
	4H	11.49	12.14	12.56	13.21	14.66	11.01	11.66	12.08	12.72	14.18
	6H	11.88	12.48	12.96	13.55	15.02	11.39	11.99	12.47	13.06	14.53
	8H	11.98	12.55	13.07	13.64	15.10	11.49	12.06	12.58	13.15	14.61
	12H	12.02	12.57	13.12	13.65	15.13	11.53	12.07	12.62	13.15	14.63
4H	2H	9.71	10.36	10.79	11.43	12.88	9.36	10.01	10.44	11.08	12.53
	3H	11.56	12.11	12.65	13.20	14.66	11.16	11.70	12.25	12.80	14.26
	4H	12.27	12.77	13.36	13.85	15.34	11.85	12.35	12.94	13.43	14.92
	6H	12.77	13.20	13.87	14.31	15.79	12.35	12.78	13.45	13.88	15.36
	8H	12.92	13.32	14.02	14.41	15.91	12.49	12.89	13.59	13.99	15.48
	12H	12.98	13.34	14.10	14.45	15.96	12.54	12.91	13.66	14.02	15.52
8H	4H	12.45	12.85	13.55	13.95	15.45	12.08	12.48	13.18	13.58	15.08
	6H	13.07	13.40	14.19	14.54	16.04	12.70	13.03	13.82	14.17	15.66
	8H	13.29	13.58	14.42	14.70	16.21	12.90	13.19	14.03	14.32	15.83
	12H	13.41	13.66	14.54	14.78	16.33	13.01	13.27	14.14	14.38	15.93
12H	4H	12.43	12.79	13.55	13.91	15.41	12.07	12.43	13.19	13.54	15.05
	6H	13.10	13.39	14.23	14.51	16.02	12.74	13.03	13.86	14.15	15.66
	8H	13.33	13.59	14.46	14.70	16.25	12.96	13.22	14.09	14.33	15.88