

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919328

Luminaire Tested: DFN2DIP-PN3F0-030D060US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919328
REPORT IS A COMBINATION OF REPORTS P899553 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-030D060US935-FLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7129.1 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919328
CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-FLLFLL

Luminous Intensity Polar Plot

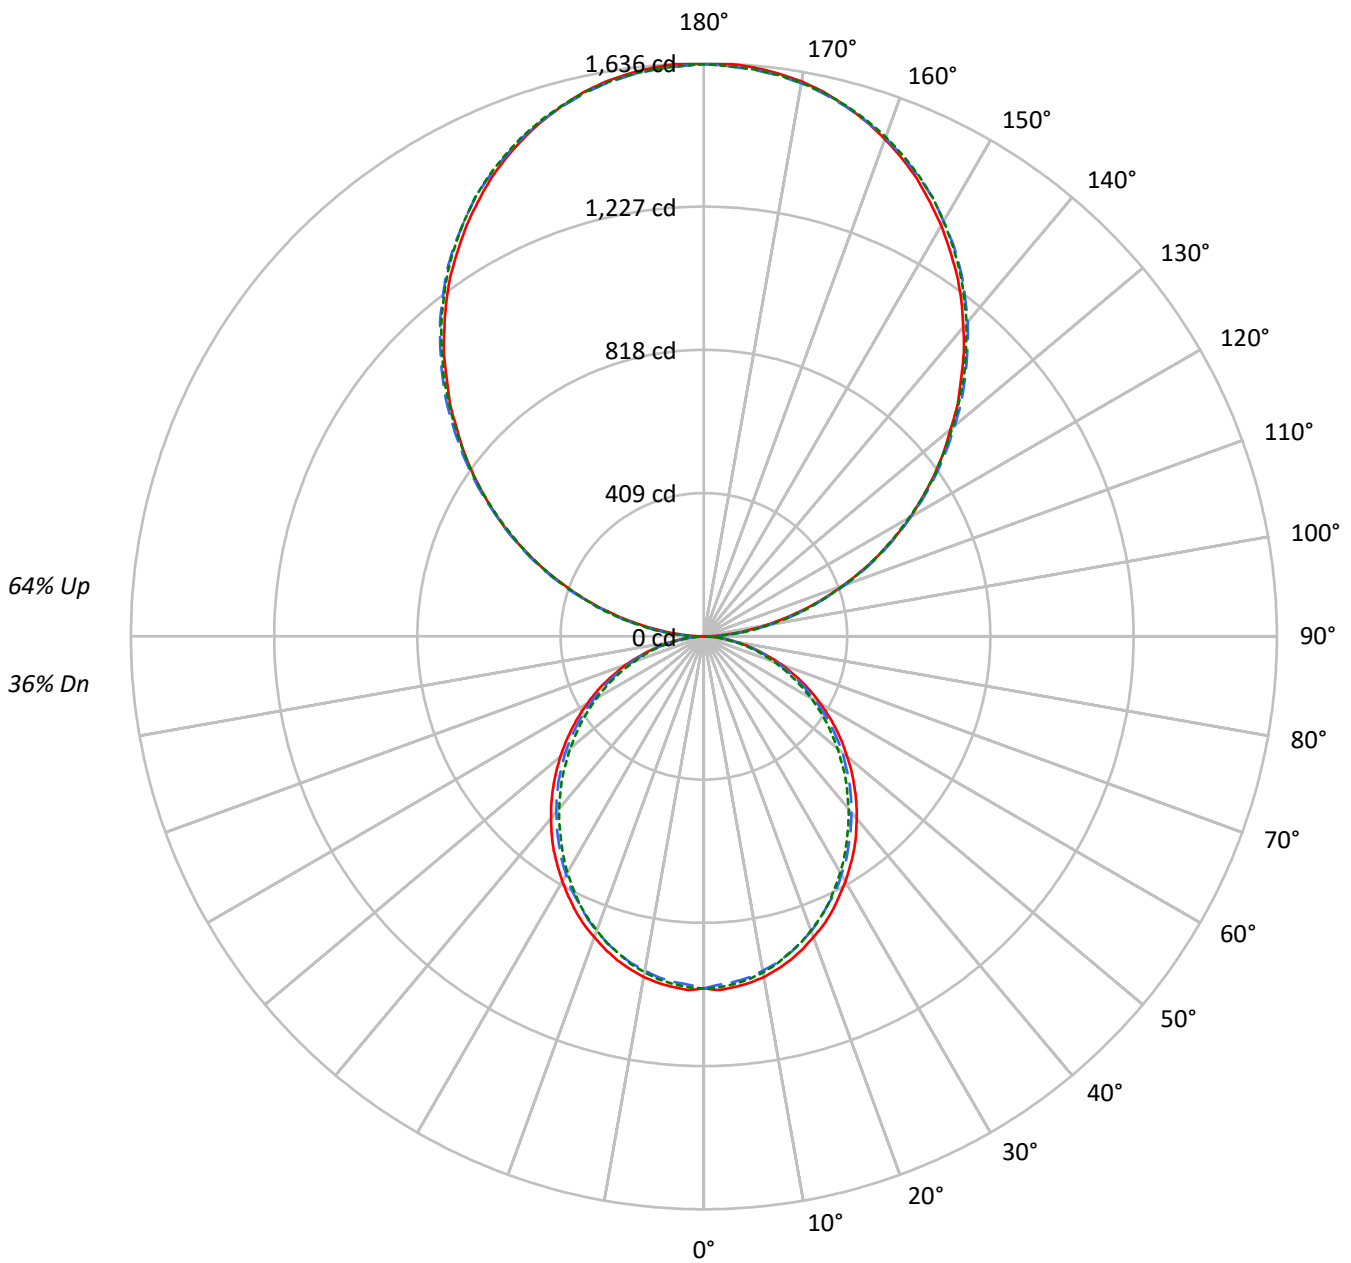

— 0°-180° - - 45°-225° - - - 90°-270°



TEST NUMBER: P919328

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36				36
1	95	90	87	83	85	82	79	76	66	64	62	52	50	49	38	37	36	30				30
2	86	79	73	68	78	72	66	62	58	54	51	45	43	41	34	32	31	25				25
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26	21				21
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	27	24	22	18				18
5	66	54	47	41	59	50	43	38	40	35	31	32	28	25	24	22	20	16				16
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17	14				14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	20	20	17	15	12				12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11				11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10				10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1175	1175	1175
5°	1176	1158	1166
10°	1166	1141	1150
15°	1148	1122	1124
20°	1124	1095	1099
25°	1100	1063	1069
30°	1071	1033	1031
35°	1043	998	992
40°	1008	962	954
45°	974	927	915
50°	936	889	870
55°	897	846	829
60°	852	795	781
65°	803	741	726
70°	741	677	665
75°	655	599	609
80°	551	499	502
85°	388	330	327

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1619 cd/sqm



TEST NUMBER: P919328

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.3
10°-20°	266.2	3.7
20°-30°	391.1	5.5
30°-40°	454.3	6.4
40°-50°	453.7	6.4
50°-60°	395.6	5.5
60°-70°	292.5	4.1
70°-80°	165.5	2.3
80°-90°	48.3	0.7
90°-100°	101.1	1.4
100°-110°	321.2	4.5
110°-120°	549.7	7.7
120°-130°	723.0	10.1
130°-140°	811.5	11.4
140°-150°	795.8	11.2
150°-160°	667.5	9.4
160°-170°	442.7	6.2
170°-180°	154.7	2.2
0°-30°	751.9	10.5
0°-40°	1206.2	16.9
0°-60°	2055.6	28.8
0°-90°	2561.8	35.9
90°-120°	972.0	13.6
90°-150°	3302.3	46.3
90°-180°	4567.0	64.1
0°-180°	7129.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1005	1005	1005	1005	1005	
5°	1005	1001	991	998	996	95
15°	957	951	938	942	938	269
25°	866	858	842	844	842	398
35°	747	737	722	716	711	467
45°	608	601	587	576	572	469
55°	460	454	443	431	426	411
65°	310	304	295	286	281	307
75°	162	160	156	150	152	173
85°	40	39	38	35	34	44
90°	2	18	48	45	47	7
95°	72	86	88	88	86	80
105°	296	300	303	306	306	313
115°	552	560	557	556	552	546
125°	802	815	811	806	805	717
135°	1038	1053	1056	1055	1051	802
145°	1260	1270	1278	1279	1274	787
155°	1441	1445	1449	1456	1452	663
165°	1567	1566	1566	1576	1569	442
175°	1631	1627	1624	1634	1625	155
180°	1634	1634	1634	1634	1634	



TEST NUMBER: P919328

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1005.0	1005.0	1005.0	1005.0	1005.0
2.5°	1010.9	1006.1	995.4	1005.0	1003.2
5°	1005.0	1001.3	990.6	998.3	996.4
7.5°	998.3	992.6	981.9	989.7	987.7
10°	987.7	980.9	969.4	977.1	974.2
12.5°	973.2	967.4	955.9	960.6	958.7
15°	956.7	951.1	938.4	942.3	937.5
17.5°	936.4	930.7	918.1	922.9	918.1
20°	914.2	908.4	894.9	897.8	894.0
22.5°	892.1	883.4	870.7	870.7	868.7
25°	865.9	858.2	841.8	843.7	841.8
27.5°	836.9	830.1	817.6	814.8	809.9
30°	808.0	800.2	785.7	782.8	778.9
32.5°	777.1	771.3	755.8	749.9	746.1
35°	747.1	737.4	721.9	716.1	711.3
37.5°	713.3	704.6	689.1	682.3	677.4
40°	678.5	670.7	655.2	646.6	642.7
42.5°	644.6	636.9	621.5	611.7	606.0
45°	608.0	601.1	586.6	576.0	572.1
47.5°	572.1	565.4	549.9	539.2	533.5
50°	534.4	529.6	516.1	502.6	497.7
52.5°	497.7	490.9	478.5	467.8	461.0
55°	460.1	454.3	442.6	431.1	426.3
57.5°	422.3	417.5	404.9	393.3	389.4
60°	384.6	380.8	367.3	356.6	353.8
62.5°	347.9	341.1	331.5	321.8	318.0
65°	310.3	304.4	294.8	286.1	281.3
67.5°	271.6	266.7	258.0	251.3	247.5
70°	235.8	232.0	223.3	216.5	212.7
72.5°	199.1	195.2	190.4	183.7	180.8
75°	162.3	160.5	155.6	149.8	151.8
77.5°	129.5	125.6	123.6	120.8	118.0
80°	96.7	95.7	93.7	90.8	88.9
82.5°	65.7	65.7	64.8	60.9	60.9
85°	39.6	38.7	37.7	34.8	33.8
87.5°	17.4	15.5	13.5	10.7	9.6
90°	1.5	17.7	48.3	45.3	46.8
92.5°	30.6	41.4	42.9	44.3	44.3
95°	71.9	85.7	88.2	88.2	85.7
97.5°	119.7	132.5	137.9	137.9	137.9
100°	174.9	186.1	190.1	190.1	188.6
102.5°	233.0	241.3	246.8	248.2	246.8
105°	296.5	300.5	303.4	305.9	305.9
107.5°	359.6	365.5	365.5	366.4	359.6
110°	420.7	428.5	428.5	428.5	424.6



TEST NUMBER: P919328

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	486.6	495.0	493.5	489.6	486.6
115°	551.6	559.6	557.1	555.6	551.6
117.5°	616.2	627.1	620.1	616.2	612.3
120°	681.2	692.1	681.2	681.2	676.7
122.5°	740.3	754.1	747.2	743.3	740.3
125°	802.4	814.7	810.7	806.3	804.9
127.5°	863.0	878.2	872.8	866.9	863.0
130°	919.6	937.4	934.9	931.9	926.5
132.5°	983.2	996.9	997.9	991.0	987.0
135°	1037.8	1053.1	1056.0	1054.6	1050.6
137.5°	1098.9	1111.2	1113.7	1112.7	1106.8
140°	1152.6	1164.9	1171.8	1171.8	1166.4
142.5°	1207.7	1220.0	1224.0	1225.5	1220.0
145°	1260.0	1269.8	1277.7	1279.2	1273.8
147.5°	1306.7	1319.0	1325.0	1327.4	1322.0
150°	1355.0	1363.4	1368.8	1373.2	1368.8
152.5°	1397.8	1406.3	1413.2	1418.6	1413.2
155°	1440.7	1444.7	1449.1	1456.0	1451.6
157.5°	1477.6	1480.7	1483.1	1493.0	1486.1
160°	1510.7	1513.6	1515.1	1523.4	1517.6
162.5°	1541.2	1541.2	1542.6	1552.0	1545.1
165°	1567.3	1565.8	1565.8	1575.7	1568.8
167.5°	1591.0	1586.6	1586.6	1596.4	1589.5
170°	1608.7	1604.7	1603.3	1613.1	1604.7
172.5°	1621.0	1617.0	1615.6	1625.4	1617.0
175°	1630.8	1626.9	1623.9	1633.8	1625.4
177.5°	1636.2	1632.4	1629.4	1637.7	1629.4
180°	1633.8	1633.8	1633.8	1633.8	1633.8



TEST NUMBER: P919328
 CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.33	7.08	7.40	8.15	9.61	5.89	6.64	6.96	7.71	9.17
	3H	7.97	8.64	9.05	9.72	11.20	7.49	8.16	8.57	9.24	10.72
	4H	8.55	9.19	9.64	10.27	11.75	8.07	8.70	9.16	9.78	11.27
	6H	8.94	9.53	10.04	10.61	12.11	8.45	9.04	9.55	10.12	11.62
	8H	9.04	9.60	10.14	10.70	12.19	8.55	9.11	9.65	10.21	11.70
	12H	9.08	9.61	10.19	10.71	12.22	8.59	9.12	9.69	10.21	11.72
4H	2H	6.77	7.41	7.87	8.49	9.97	6.42	7.06	7.52	8.14	9.62
	3H	8.62	9.15	9.72	10.26	11.76	8.22	8.75	9.32	9.86	11.35
	4H	9.33	9.81	10.43	10.91	12.43	8.91	9.40	10.02	10.49	12.01
	6H	9.83	10.25	10.94	11.37	12.88	9.41	9.82	10.52	10.95	12.45
	8H	9.97	10.36	11.09	11.48	13.00	9.55	9.94	10.66	11.05	12.57
	12H	10.04	10.39	11.17	11.52	13.05	9.60	9.95	10.73	11.08	12.61
8H	4H	9.51	9.90	10.62	11.01	12.54	9.14	9.53	10.25	10.64	12.17
	6H	10.13	10.45	11.26	11.61	13.13	9.75	10.08	10.89	11.23	12.75
	8H	10.34	10.63	11.49	11.76	13.30	9.96	10.24	11.10	11.38	12.92
	12H	10.47	10.71	11.61	11.85	13.42	10.07	10.31	11.21	11.45	13.02
12H	4H	9.49	9.84	10.62	10.97	12.50	9.13	9.48	10.26	10.61	12.14
	6H	10.16	10.44	11.30	11.57	13.12	9.79	10.07	10.93	11.21	12.75
	8H	10.39	10.63	11.53	11.77	13.34	10.02	10.26	11.16	11.40	12.97