

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903379

Luminaire Tested: DFN2DIP-PN4F0-100D080US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903379
REPORT IS A COMBINATION OF REPORTS P901214 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D080US830-RLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 15476.5 lumens
Efficiency: N/A
Efficacy: 97.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 158.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903379
CATALOG NUMBER: DFN2DIP-PN4F0-100D080US830-RLLONL

Luminous Intensity Polar Plot

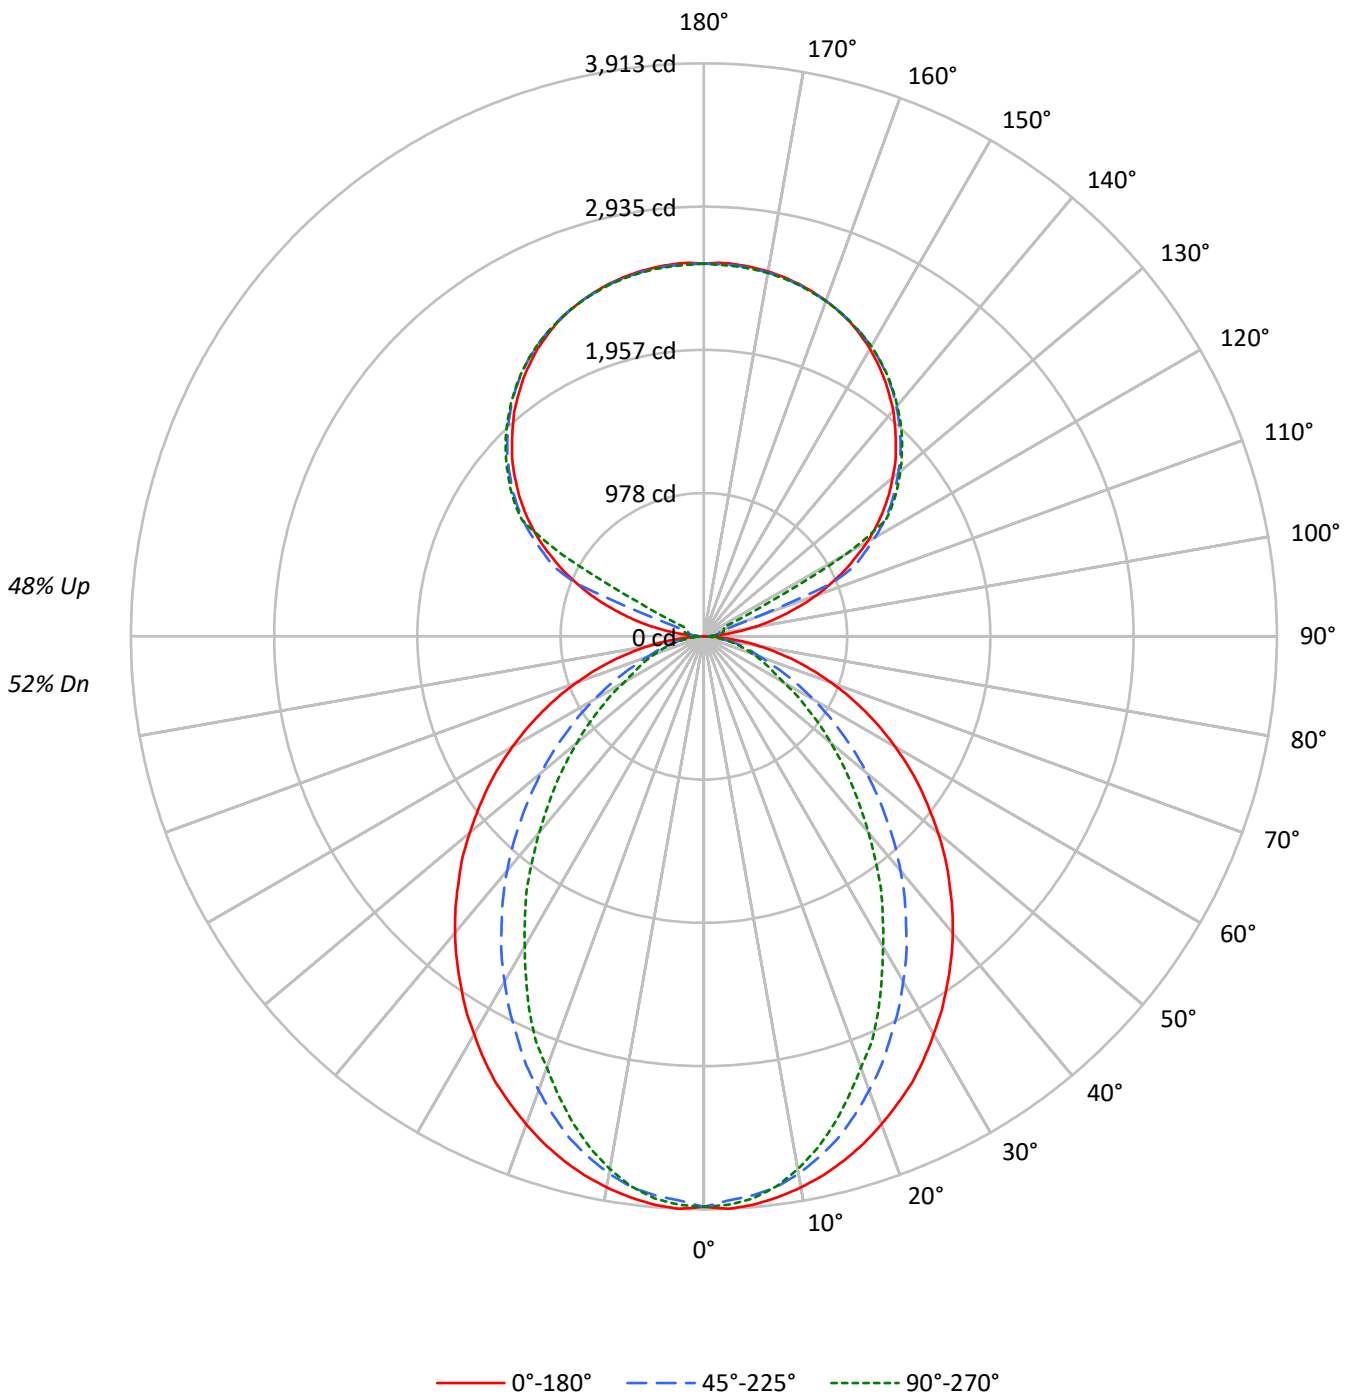



TEST NUMBER: P903379

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52	52	52	52
1	99	95	91	87	91	88	84	82	75	72	70	63	61	60	52	51	50	45	45	45	45
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43	38	38	38	38
3	83	74	66	61	76	68	62	57	59	54	50	50	46	43	41	39	37	33	33	33	33
4	76	65	58	52	70	61	54	49	52	47	43	45	41	38	37	35	32	29	29	29	29
5	70	59	51	45	64	55	48	42	47	42	38	40	36	33	34	31	28	25	25	25	25
6	65	53	45	39	60	49	42	37	43	37	33	37	32	29	31	28	25	22	22	22	22
7	60	48	40	35	55	45	38	33	39	33	29	33	29	26	28	25	23	20	20	20	20
8	56	44	36	31	51	41	34	29	36	30	26	31	26	23	26	23	20	18	18	18	18
9	52	40	32	28	48	37	31	26	33	27	24	28	24	21	24	21	19	16	16	16	16
10	48	37	30	25	45	34	28	24	30	25	21	26	22	19	23	19	17	15	15	15	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2844	2844	2844
5°	2848	2799	2817
10°	2820	2744	2726
15°	2781	2654	2584
20°	2730	2529	2411
25°	2677	2389	2244
30°	2606	2246	2031
35°	2537	2092	1844
40°	2467	1932	1630
45°	2385	1755	1436
50°	2301	1576	1246
55°	2212	1385	1063
60°	2110	1185	876
65°	1992	982	789
70°	1850	792	715
75°	1671	699	651
80°	1411	588	567
85°	983	394	429

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2385 cd/sqm



TEST NUMBER: P903379

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	365.1	2.4
10°-20°	1002.2	6.5
20°-30°	1407.1	9.1
30°-40°	1533.9	9.9
40°-50°	1409.8	9.1
50°-60°	1107.2	7.2
60°-70°	720.7	4.7
70°-80°	371.0	2.4
80°-90°	99.2	0.6
90°-100°	83.9	0.5
100°-110°	312.8	2.0
110°-120°	829.6	5.4
120°-130°	1376.0	8.9
130°-140°	1461.6	9.4
140°-150°	1358.4	8.8
150°-160°	1092.1	7.1
160°-170°	703.7	4.5
170°-180°	242.2	1.6
0°-30°	2774.5	17.9
0°-40°	4308.3	27.8
0°-60°	6825.3	44.1
0°-90°	8016.1	51.8
90°-120°	1226.4	7.9
90°-150°	5422.4	35.0
90°-180°	7460.0	48.2
0°-180°	15476.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3896	3896	3896	3896	3896	
5°	3896	3878	3832	3864	3853	369
15°	3705	3666	3546	3480	3444	1044
25°	3363	3250	3018	2873	2820	1547
35°	2898	2718	2408	2186	2108	1814
45°	2369	2133	1763	1512	1428	1830
55°	1801	1526	1146	934	867	1610
65°	1216	931	613	494	483	1206
75°	649	402	282	257	254	686
85°	152	77	67	67	67	174
90°	2	22	37	46	50	15
95°	120	59	72	81	79	142
105°	560	615	112	132	140	598
115°	1059	1090	1136	284	151	1042
125°	1497	1521	1556	1569	1574	1335
135°	1852	1882	1898	1917	1913	1431
145°	2149	2147	2178	2191	2182	1344
155°	2366	2350	2372	2383	2368	1090
165°	2493	2482	2488	2501	2488	704
175°	2550	2537	2541	2554	2536	243
180°	2545	2545	2545	2545	2545	



TEST NUMBER: P903379

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3895.5	3895.5	3895.5	3895.5	3895.5
2.5°	3913.1	3895.5	3856.6	3892.1	3885.1
5°	3895.5	3877.9	3831.9	3863.8	3853.2
7.5°	3863.8	3842.7	3793.4	3807.2	3789.7
10°	3821.4	3796.7	3726.4	3715.6	3694.7
12.5°	3768.8	3736.9	3641.5	3620.6	3581.7
15°	3705.1	3666.2	3546.5	3479.6	3444.4
17.5°	3631.0	3574.6	3426.5	3349.0	3292.6
20°	3546.5	3475.8	3299.7	3211.8	3134.0
22.5°	3454.9	3373.7	3169.1	3049.5	2996.7
25°	3363.3	3250.4	3017.6	2873.2	2820.2
27.5°	3254.0	3134.0	2876.6	2710.9	2629.8
30°	3137.7	3003.4	2721.4	2541.9	2446.6
32.5°	3024.8	2862.4	2573.7	2362.0	2273.7
35°	2897.9	2718.1	2408.0	2185.8	2108.0
37.5°	2774.6	2580.4	2252.8	2009.3	1921.4
40°	2644.0	2432.7	2090.5	1840.2	1748.6
42.5°	2510.1	2284.5	1928.5	1667.5	1579.5
45°	2369.1	2132.7	1762.8	1512.2	1427.7
47.5°	2235.2	1985.0	1604.2	1353.6	1276.2
50°	2087.1	1836.8	1449.0	1205.5	1131.8
52.5°	1942.3	1677.9	1300.9	1068.2	1001.3
55°	1801.3	1526.4	1145.7	934.3	867.3
57.5°	1657.0	1374.9	1008.4	810.9	754.4
60°	1508.8	1226.8	863.7	684.1	627.6
62.5°	1364.4	1082.4	740.2	571.2	543.1
65°	1216.4	930.6	613.4	493.7	482.9
67.5°	1075.3	789.6	493.7	433.5	423.0
70°	927.2	652.3	408.8	373.6	359.5
72.5°	786.2	525.1	341.9	313.8	306.7
75°	648.6	401.7	282.0	257.3	253.9
77.5°	511.3	285.4	222.2	207.9	200.9
80°	384.1	204.6	169.1	155.2	155.2
82.5°	267.8	137.6	116.3	109.2	109.2
85°	151.5	77.4	66.9	66.9	66.9
87.5°	56.5	28.1	28.1	24.7	24.7
90°	1.8	22.1	36.8	46.1	49.7
92.5°	46.1	38.7	44.2	47.9	49.7
95°	119.6	58.8	71.7	81.2	79.2
97.5°	215.4	64.5	93.8	99.5	101.2
100°	326.0	73.7	105.0	119.6	123.3
102.5°	447.4	443.8	108.7	128.8	134.5
105°	559.8	615.1	112.4	132.5	140.0
107.5°	690.5	736.4	116.1	136.2	143.6
110°	815.9	854.3	322.3	138.2	145.4



TEST NUMBER: P903379

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	933.7	966.7	935.5	141.7	147.4
115°	1058.8	1090.1	1136.1	283.6	151.1
117.5°	1167.4	1204.2	1235.7	972.1	489.8
120°	1289.0	1316.5	1349.8	1371.9	1123.2
122.5°	1391.9	1421.5	1458.5	1469.4	1471.4
125°	1496.9	1521.0	1555.9	1568.9	1574.3
127.5°	1592.7	1618.5	1646.3	1664.6	1666.4
130°	1683.0	1712.5	1732.7	1753.0	1751.2
132.5°	1775.1	1799.1	1819.3	1835.9	1834.1
135°	1852.5	1882.0	1898.4	1917.0	1913.3
137.5°	1933.4	1955.5	1974.1	1992.4	1987.0
140°	2012.5	2027.4	2047.6	2064.2	2054.9
142.5°	2079.1	2091.9	2115.7	2130.4	2121.2
145°	2149.0	2147.0	2178.3	2191.2	2182.0
147.5°	2209.6	2204.1	2235.3	2244.6	2237.3
150°	2268.6	2255.7	2285.2	2296.1	2287.0
152.5°	2318.3	2303.6	2331.1	2342.3	2329.4
155°	2366.2	2349.8	2371.8	2382.7	2368.1
157.5°	2404.8	2390.2	2406.8	2419.7	2404.8
160°	2438.1	2427.0	2438.1	2449.0	2436.1
162.5°	2467.4	2456.5	2465.6	2478.5	2461.9
165°	2493.2	2482.3	2487.7	2500.6	2487.7
167.5°	2513.5	2502.4	2508.0	2520.9	2504.3
170°	2530.2	2518.9	2522.7	2535.6	2518.9
172.5°	2541.1	2530.2	2533.8	2546.7	2530.2
175°	2550.2	2537.3	2541.1	2553.9	2535.6
177.5°	2553.9	2541.1	2543.0	2555.9	2539.3
180°	2544.8	2544.8	2544.8	2544.8	2544.8



TEST NUMBER: P903379
 CATALOG NUMBER: DFN2DIP-PN4F0-100D080US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.95	11.80	11.90	12.76	14.00	6.92	7.76	7.86	8.72	9.97
	3H	12.63	13.39	13.59	14.36	15.63	8.11	8.86	9.07	9.83	11.10
	4H	13.24	13.96	14.22	14.93	16.21	8.56	9.27	9.53	10.25	11.53
	6H	13.67	14.33	14.65	15.30	16.60	8.88	9.54	9.87	10.52	11.81
	8H	13.80	14.42	14.79	15.42	16.71	8.97	9.60	9.96	10.59	11.88
	12H	13.86	14.46	14.86	15.44	16.76	9.02	9.61	10.01	10.60	11.91
4H	2H	10.97	11.69	11.95	12.66	13.94	7.52	8.23	8.50	9.20	10.48
	3H	12.81	13.40	13.79	14.40	15.70	8.87	9.46	9.86	10.46	11.76
	4H	13.50	14.04	14.50	15.04	16.36	9.42	9.96	10.41	10.95	12.27
	6H	14.02	14.48	15.03	15.50	16.82	9.84	10.30	10.85	11.32	12.64
	8H	14.20	14.63	15.21	15.64	16.97	9.97	10.40	10.98	11.41	12.74
	12H	14.29	14.69	15.32	15.71	17.05	10.03	10.43	11.06	11.45	12.79
8H	4H	13.47	13.90	14.48	14.92	16.25	9.70	10.13	10.71	11.15	12.48
	6H	14.04	14.40	15.07	15.45	16.78	10.22	10.58	11.25	11.63	12.96
	8H	14.26	14.57	15.30	15.61	16.96	10.41	10.73	11.45	11.77	13.11
	12H	14.40	14.68	15.44	15.71	17.10	10.53	10.81	11.58	11.85	13.24
12H	4H	13.42	13.81	14.45	14.84	16.18	9.71	10.10	10.73	11.13	12.46
	6H	14.01	14.33	15.06	15.37	16.72	10.27	10.59	11.31	11.63	12.97
	8H	14.24	14.52	15.28	15.55	16.94	10.48	10.76	11.53	11.80	13.19