

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905947

Luminaire Tested: DFN2DIP-PN4F0-060D040US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905947
REPORT IS A COMBINATION OF REPORTS P901134 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D040US835-RLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9060.0 lumens
Efficiency: N/A
Efficacy: 106.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 84.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905947
CATALOG NUMBER: DFN2DIP-PN4F0-060D040US835-RLLONL

Luminous Intensity Polar Plot

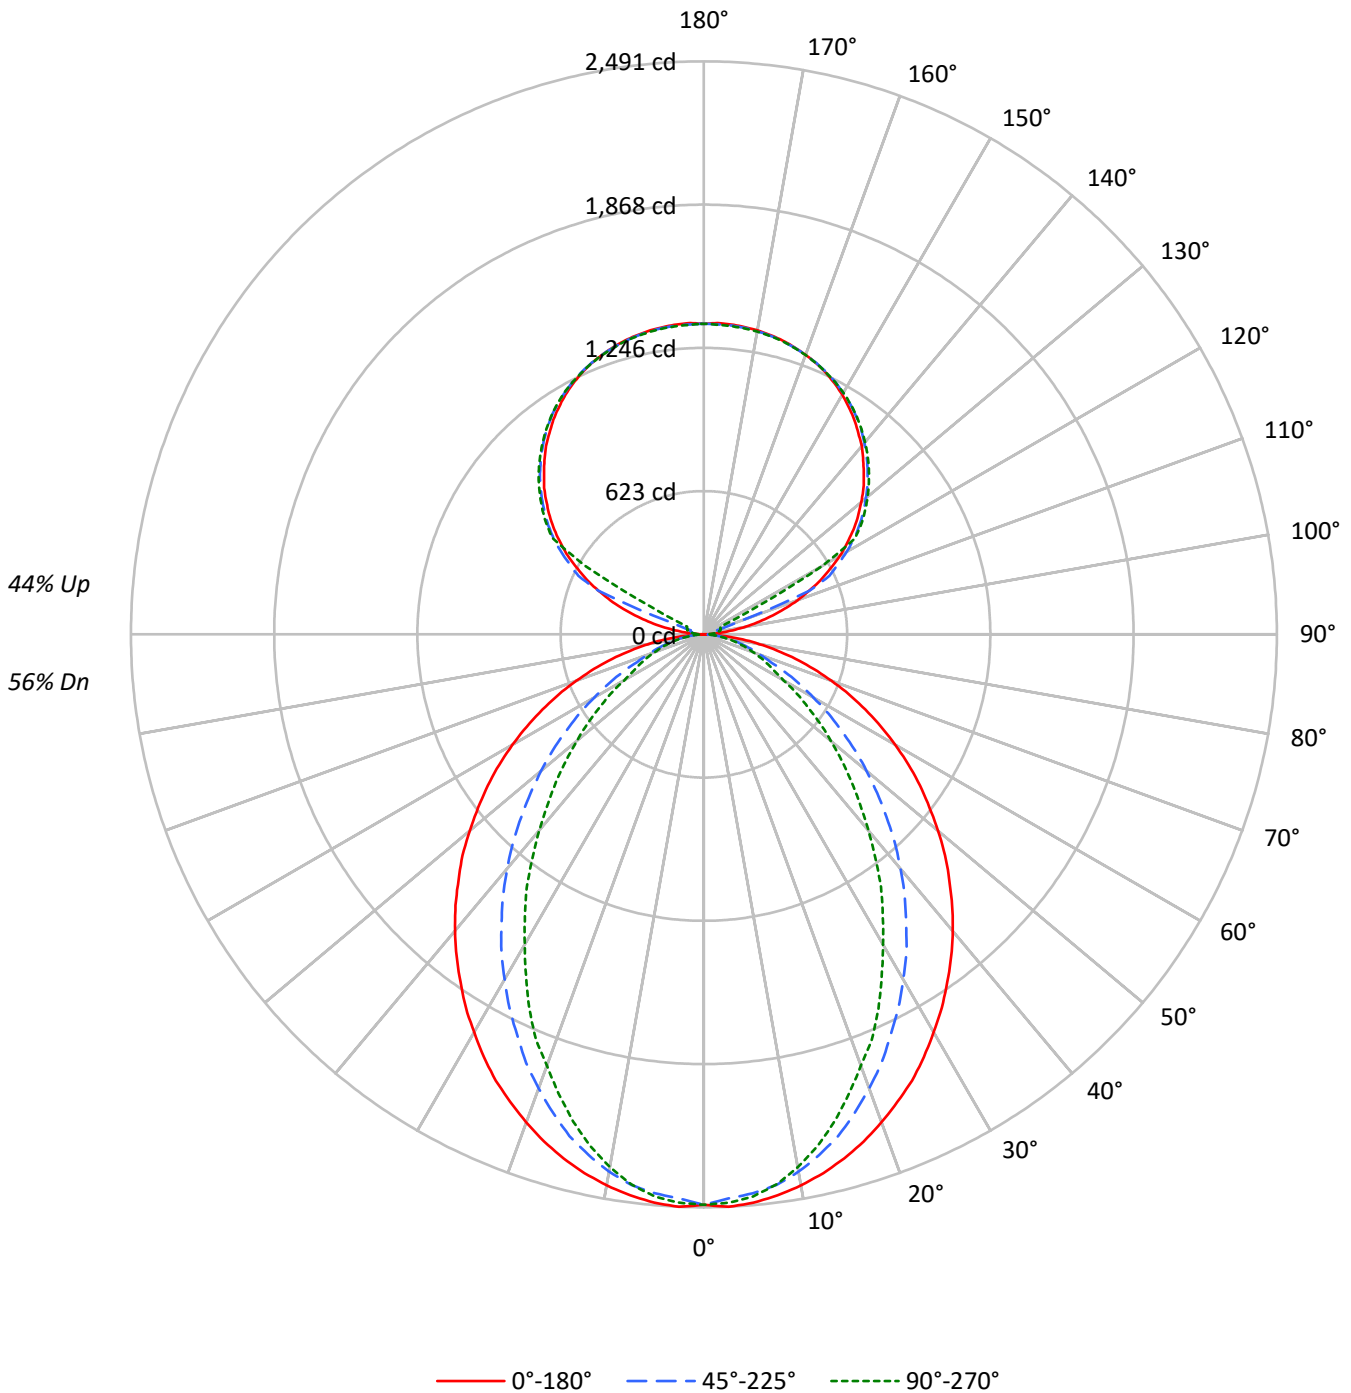



TEST NUMBER: P905947

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56	56	56	56
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53	49	49	49	49
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46	42	42	42	42
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40	36	36	36	36
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35	31	31	31	31
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31	27	27	27	27
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27	24	24	24	24
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24	22	22	22	22
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22	20	20	20	20
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20	18	18	18	18
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18	16	16	16	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1810	1810	1810
5°	1813	1782	1793
10°	1795	1747	1735
15°	1770	1689	1645
20°	1738	1610	1535
25°	1704	1521	1428
30°	1659	1430	1293
35°	1615	1332	1174
40°	1570	1230	1037
45°	1518	1117	914
50°	1464	1003	793
55°	1408	882	677
60°	1343	755	557
65°	1268	625	502
70°	1177	504	455
75°	1064	445	415
80°	898	374	361
85°	626	251	273

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1518 cd/sqm



TEST NUMBER: P905947
 CATALOG NUMBER: DFN2DIP-PN4F0-060D040US835-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	2.6
10°-20°	638.0	7.0
20°-30°	895.7	9.9
30°-40°	976.4	10.8
40°-50°	897.4	9.9
50°-60°	704.8	7.8
60°-70°	458.8	5.1
70°-80°	236.1	2.6
80°-90°	62.7	0.7
90°-100°	44.5	0.5
100°-110°	165.9	1.8
110°-120°	440.1	4.9
120°-130°	729.9	8.1
130°-140°	775.4	8.6
140°-150°	720.6	8.0
150°-160°	579.4	6.4
160°-170°	373.3	4.1
170°-180°	128.5	1.4
0°-30°	1766.2	19.5
0°-40°	2742.6	30.3
0°-60°	4344.8	48.0
0°-90°	5102.4	56.3
90°-120°	650.5	7.2
90°-150°	2876.4	31.7
90°-180°	3958.0	43.7
0°-180°	9060.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	1	12	20	24	26	9
95°	63	31	38	43	42	75
105°	297	326	60	70	74	317
115°	562	578	603	150	80	553
125°	794	807	825	832	835	708
135°	983	998	1007	1017	1015	759
145°	1140	1139	1156	1162	1158	713
155°	1255	1246	1258	1264	1256	578
165°	1323	1317	1320	1326	1320	374
175°	1353	1346	1348	1355	1345	129
180°	1350	1350	1350	1350	1350	



TEST NUMBER: P905947

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	0.9	11.7	19.5	24.5	26.3
92.5°	24.5	20.5	23.4	25.4	26.3
95°	63.4	31.2	38.0	43.0	42.0
97.5°	114.3	34.2	49.8	52.8	53.7
100°	172.9	39.1	55.7	63.4	65.4
102.5°	237.3	235.5	57.6	68.3	71.3
105°	296.9	326.3	59.6	70.3	74.2
107.5°	366.3	390.7	61.6	72.3	76.2
110°	432.8	453.2	171.0	73.3	77.1



TEST NUMBER: P905947

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	495.3	512.8	496.2	75.2	78.2
115°	561.6	578.2	602.7	150.4	80.2
117.5°	619.3	638.8	655.5	515.7	259.8
120°	683.8	698.4	716.0	727.8	595.9
122.5°	738.4	754.1	773.7	779.5	780.5
125°	794.1	806.9	825.4	832.3	835.2
127.5°	844.9	858.6	873.3	883.1	884.0
130°	892.8	908.5	919.1	929.9	929.0
132.5°	941.6	954.4	965.1	973.9	973.0
135°	982.7	998.4	1007.1	1016.9	1015.0
137.5°	1025.6	1037.3	1047.2	1056.9	1054.0
140°	1067.6	1075.5	1086.2	1095.0	1090.1
142.5°	1102.9	1109.7	1122.4	1130.1	1125.3
145°	1140.0	1139.0	1155.5	1162.4	1157.5
147.5°	1172.1	1169.2	1185.8	1190.7	1186.9
150°	1203.4	1196.6	1212.3	1218.1	1213.2
152.5°	1229.8	1222.0	1236.6	1242.5	1235.7
155°	1255.2	1246.5	1258.2	1264.0	1256.2
157.5°	1275.7	1267.9	1276.8	1283.6	1275.7
160°	1293.3	1287.4	1293.3	1299.1	1292.3
162.5°	1308.9	1303.1	1308.0	1314.8	1306.0
165°	1322.6	1316.8	1319.7	1326.5	1319.7
167.5°	1333.4	1327.4	1330.5	1337.3	1328.5
170°	1342.2	1336.3	1338.2	1345.1	1336.3
172.5°	1348.0	1342.2	1344.2	1351.0	1342.2
175°	1352.8	1346.0	1348.0	1354.8	1345.1
177.5°	1354.8	1348.0	1349.0	1355.9	1347.1
180°	1350.0	1350.0	1350.0	1350.0	1350.0



TEST NUMBER: P905947
 CATALOG NUMBER: DFN2DIP-PN4F0-060D040US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.79	10.67	10.69	11.59	12.77	5.75	6.64	6.66	7.56	8.74
	3H	11.47	12.26	12.39	13.19	14.40	6.95	7.74	7.87	8.67	9.87
	4H	12.08	12.83	13.02	13.77	14.98	7.40	8.15	8.33	9.08	10.30
	6H	12.51	13.20	13.46	14.14	15.37	7.72	8.41	8.67	9.35	10.58
	8H	12.64	13.29	13.59	14.25	15.48	7.82	8.47	8.77	9.43	10.65
	12H	12.70	13.33	13.66	14.28	15.53	7.86	8.48	8.82	9.44	10.69
4H	2H	9.81	10.56	10.75	11.49	12.71	6.36	7.10	7.30	8.04	9.25
	3H	11.65	12.27	12.60	13.24	14.47	7.71	8.33	8.66	9.30	10.53
	4H	12.35	12.91	13.30	13.87	15.13	8.26	8.83	9.22	9.79	11.04
	6H	12.87	13.35	13.84	14.34	15.59	8.69	9.17	9.66	10.16	11.41
	8H	13.04	13.50	14.02	14.48	15.74	8.82	9.27	9.79	10.25	11.52
	12H	13.14	13.55	14.14	14.55	15.82	8.88	9.29	9.88	10.29	11.56
8H	4H	12.32	12.77	13.29	13.75	15.02	8.55	9.00	9.52	9.98	11.25
	6H	12.89	13.26	13.89	14.28	15.55	9.07	9.44	10.07	10.47	11.73
	8H	13.11	13.44	14.12	14.45	15.73	9.26	9.59	10.27	10.60	11.89
	12H	13.25	13.54	14.26	14.54	15.87	9.38	9.68	10.39	10.68	12.01
12H	4H	12.27	12.68	13.26	13.68	14.95	8.56	8.97	9.55	9.96	11.23
	6H	12.86	13.20	13.87	14.20	15.49	9.12	9.45	10.13	10.46	11.74
	8H	13.09	13.38	14.10	14.38	15.71	9.33	9.63	10.34	10.63	11.96