

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917466

Luminaire Tested: DFN2DIP-SQ3F0-090D120US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917466
REPORT IS A COMBINATION OF REPORTS P900016 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-090D120US930-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14895.5 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 181.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917466
CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US930-RLFL

Luminous Intensity Polar Plot

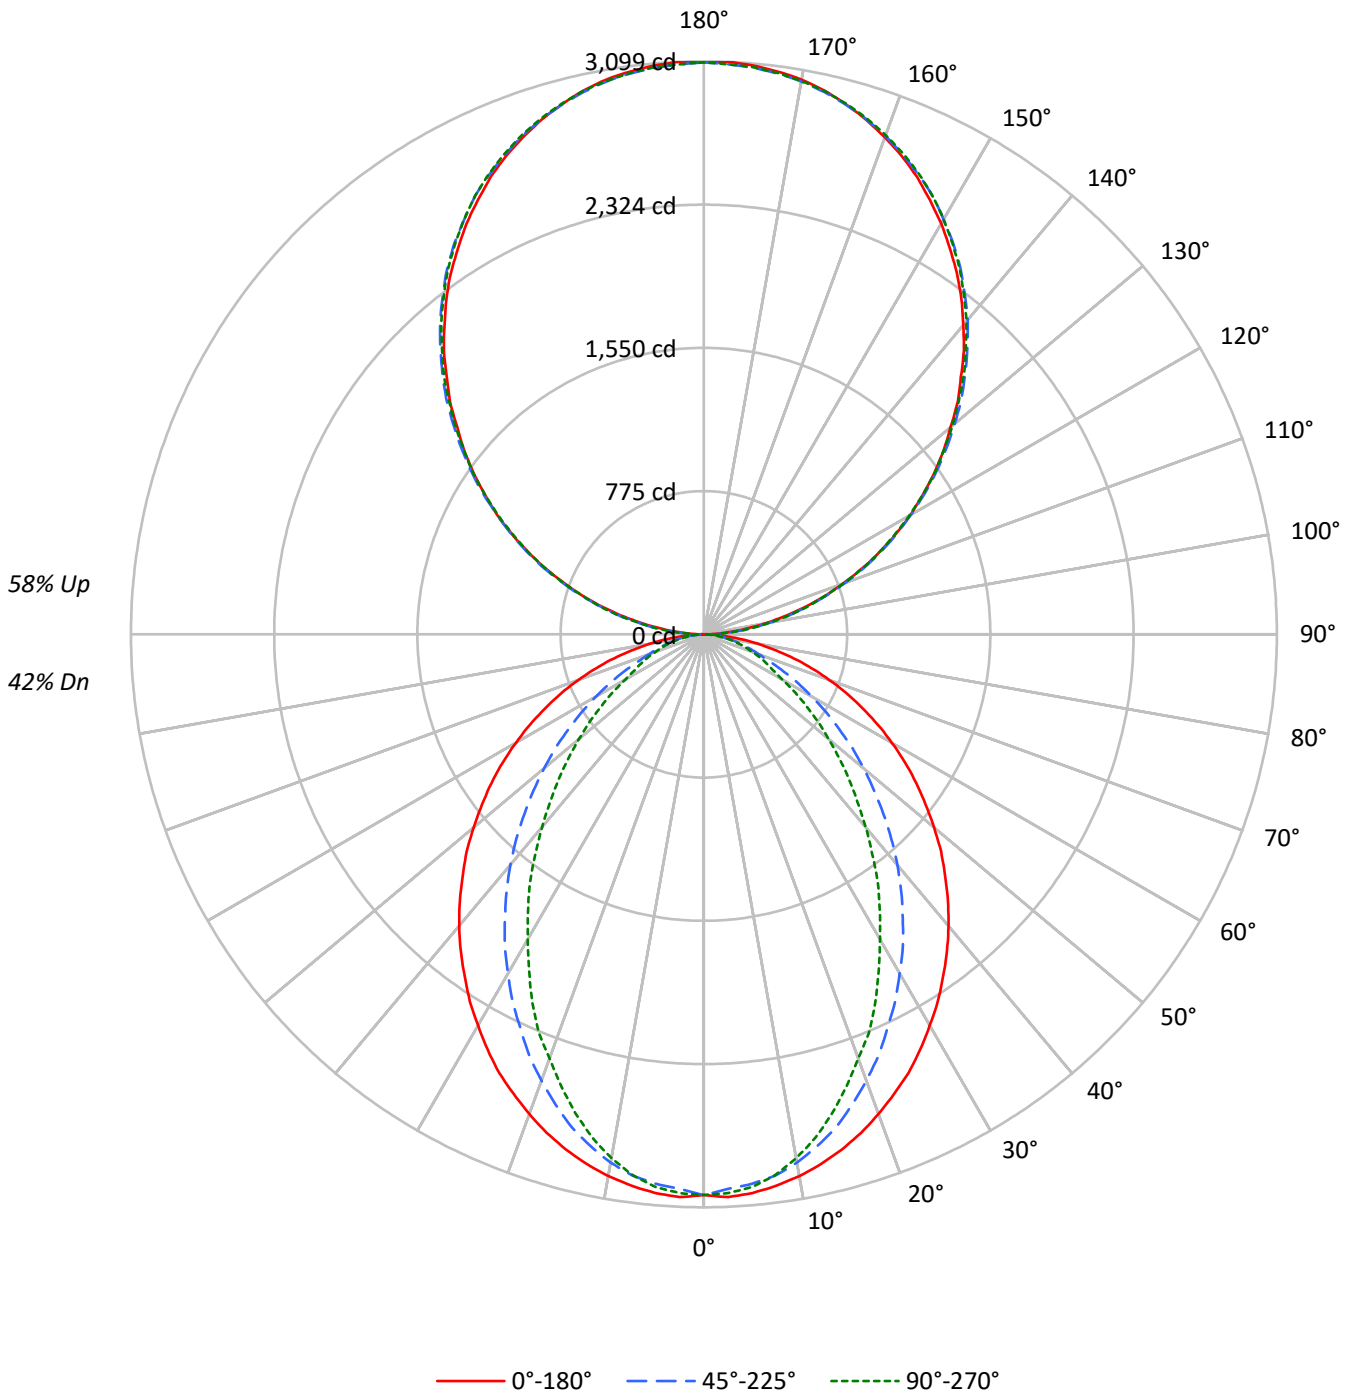



TEST NUMBER: P917466

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	49	49	49	42
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42	42	42	42	36
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	36	36	36	31
3	81	72	65	59	73	66	60	55	55	50	47	44	41	39	35	33	31	31	31	31	27
4	74	64	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27	27	27	27	23
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24	24	24	24	20
6	63	51	43	38	57	47	40	35	40	34	30	33	29	26	26	23	21	21	21	21	18
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19	19	19	19	16
8	54	42	34	29	49	39	32	28	33	28	24	27	23	21	22	19	17	17	17	17	15
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	20	18	16	16	16	16	13
10	47	35	28	24	43	33	26	22	28	23	19	23	19	17	19	16	14	14	14	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3475	3475	3475
5°	3478	3417	3440
10°	3442	3348	3327
15°	3392	3235	3153
20°	3327	3080	2940
25°	3261	2908	2734
30°	3172	2730	2473
35°	3085	2540	2244
40°	2997	2343	1982
45°	2894	2126	1744
50°	2788	1906	1512
55°	2677	1672	1289
60°	2548	1427	1060
65°	2399	1178	952
70°	2219	946	860
75°	1993	829	780
80°	1665	688	673
85°	1129	448	499

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 3112 cd/sqm



TEST NUMBER: P917466

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	284.2	1.9
10°-20°	780.3	5.2
20°-30°	1095.5	7.4
30°-40°	1194.1	8.0
40°-50°	1097.5	7.4
50°-60°	861.9	5.8
60°-70°	561.0	3.8
70°-80°	288.8	1.9
80°-90°	82.5	0.6
90°-100°	191.5	1.3
100°-110°	608.3	4.1
110°-120°	1041.1	7.0
120°-130°	1369.2	9.2
130°-140°	1536.9	10.3
140°-150°	1507.1	10.1
150°-160°	1264.2	8.5
160°-170°	838.4	5.6
170°-180°	293.0	2.0
0°-30°	2159.9	14.5
0°-40°	3354.0	22.5
0°-60°	5313.5	35.7
0°-90°	6245.8	41.9
90°-120°	1840.9	12.4
90°-150°	6254.0	42.0
90°-180°	8650.0	58.1
0°-180°	14895.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3033	3033	3033	3033	3033	
5°	3033	3019	2983	3008	3000	288
15°	2884	2854	2761	2709	2682	813
25°	2618	2530	2349	2237	2196	1204
35°	2256	2116	1875	1702	1641	1412
45°	1844	1660	1372	1177	1111	1424
55°	1402	1188	892	727	675	1253
65°	947	724	478	384	376	939
75°	505	313	220	200	198	534
85°	118	60	52	52	52	135
90°	3	34	91	86	89	15
95°	136	162	167	167	162	152
105°	562	569	575	579	579	593
115°	1045	1060	1055	1052	1045	1033
125°	1520	1543	1536	1527	1524	1358
135°	1965	1994	2000	1997	1990	1519
145°	2386	2405	2420	2423	2412	1491
155°	2728	2736	2744	2757	2749	1256
165°	2968	2966	2966	2984	2971	837
175°	3089	3081	3076	3094	3078	293
180°	3094	3094	3094	3094	3094	



TEST NUMBER: P917466

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3032.7	3032.7	3032.7	3032.7	3032.7
2.5°	3046.4	3032.7	3002.3	3030.1	3024.5
5°	3032.7	3019.0	2983.2	3007.9	2999.7
7.5°	3007.9	2991.6	2953.2	2963.9	2950.2
10°	2975.0	2955.8	2901.1	2892.6	2876.3
12.5°	2933.9	2909.2	2835.0	2818.6	2788.3
15°	2884.4	2854.2	2761.0	2708.8	2681.5
17.5°	2826.8	2782.9	2667.5	2607.2	2563.3
20°	2761.0	2706.0	2568.8	2500.4	2439.8
22.5°	2689.7	2626.5	2467.2	2374.0	2333.0
25°	2618.3	2530.4	2349.3	2236.9	2195.5
27.5°	2533.3	2439.8	2239.5	2110.5	2047.3
30°	2442.7	2338.2	2118.6	1978.9	1904.6
32.5°	2354.7	2228.4	2003.6	1838.8	1770.1
35°	2256.1	2116.0	1874.6	1701.7	1641.1
37.5°	2160.0	2008.9	1753.8	1564.2	1495.8
40°	2058.4	1893.9	1627.4	1432.6	1361.3
42.5°	1954.1	1778.6	1501.3	1298.1	1229.6
45°	1844.4	1660.4	1372.3	1177.2	1111.4
47.5°	1740.1	1545.3	1248.9	1053.8	993.5
50°	1624.8	1430.0	1128.0	938.5	881.1
52.5°	1512.1	1306.3	1012.8	831.6	779.5
55°	1402.3	1188.3	891.9	727.4	675.2
57.5°	1290.0	1070.4	785.1	631.3	587.3
60°	1174.6	955.0	672.4	532.6	488.6
62.5°	1062.3	842.7	576.3	444.7	422.8
65°	946.9	724.5	477.5	384.3	375.9
67.5°	837.1	614.7	384.3	337.5	329.3
70°	721.9	507.8	318.3	290.9	279.8
72.5°	612.0	408.8	266.1	244.3	238.8
75°	504.9	312.7	219.6	200.3	197.7
77.5°	398.0	222.2	172.9	161.9	156.4
80°	299.1	159.3	131.6	120.8	120.8
82.5°	208.5	107.1	90.6	85.0	85.0
85°	117.9	60.3	52.1	52.1	52.1
87.5°	43.9	21.8	21.8	19.2	19.2
90°	2.8	33.6	91.4	85.9	88.6
92.5°	57.8	78.4	81.1	84.0	84.0
95°	136.2	162.3	167.0	167.0	162.3
97.5°	226.7	250.9	261.2	261.2	261.2
100°	331.2	352.6	360.0	360.0	357.3
102.5°	441.2	457.1	467.3	470.2	467.3
105°	561.6	569.0	574.6	579.3	579.3
107.5°	680.9	692.2	692.2	694.0	680.9
110°	796.6	811.5	811.5	811.5	804.1



TEST NUMBER: P917466

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	921.6	937.5	934.7	927.2	921.6
115°	1044.7	1059.7	1055.0	1052.2	1044.7
117.5°	1166.9	1187.5	1174.4	1166.9	1159.5
120°	1290.1	1310.6	1290.1	1290.1	1281.7
122.5°	1402.1	1428.2	1415.1	1407.6	1402.1
125°	1519.6	1542.9	1535.5	1527.1	1524.2
127.5°	1634.3	1663.2	1652.9	1641.8	1634.3
130°	1741.6	1775.1	1770.5	1764.9	1754.6
132.5°	1861.9	1888.1	1889.9	1876.8	1869.4
135°	1965.4	1994.4	2000.0	1997.2	1989.7
137.5°	2081.1	2104.4	2109.1	2107.2	2096.1
140°	2182.8	2206.1	2219.2	2219.2	2208.9
142.5°	2287.3	2310.6	2318.1	2320.8	2310.6
145°	2386.1	2404.8	2419.7	2422.6	2412.3
147.5°	2474.8	2498.1	2509.3	2514.0	2503.7
150°	2566.2	2582.0	2592.3	2600.7	2592.3
152.5°	2647.4	2663.2	2676.3	2686.6	2676.3
155°	2728.5	2736.0	2744.4	2757.4	2749.0
157.5°	2798.5	2804.1	2808.7	2827.4	2814.3
160°	2861.0	2866.6	2869.4	2885.3	2874.0
162.5°	2918.8	2918.8	2921.6	2939.3	2926.3
165°	2968.3	2965.5	2965.5	2984.1	2971.0
167.5°	3013.0	3004.6	3004.6	3023.3	3010.2
170°	3046.6	3039.1	3036.3	3055.0	3039.1
172.5°	3069.9	3062.4	3059.7	3078.3	3062.4
175°	3088.6	3081.1	3075.5	3094.1	3078.3
177.5°	3098.9	3091.4	3085.7	3101.6	3085.7
180°	3094.1	3094.1	3094.1	3094.1	3094.1



TEST NUMBER: P917466
 CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.64	11.40	11.67	12.44	13.82	6.60	7.37	7.63	8.40	9.78
	3H	12.30	12.99	13.34	14.03	15.44	7.77	8.46	8.81	9.50	10.91
	4H	12.91	13.56	13.96	14.60	16.01	8.22	8.87	9.27	9.91	11.32
	6H	13.32	13.92	14.38	14.97	16.39	8.53	9.13	9.59	10.18	11.60
	8H	13.44	14.01	14.51	15.08	16.50	8.61	9.18	9.68	10.25	11.67
	12H	13.50	14.04	14.57	15.10	16.54	8.65	9.19	9.72	10.25	11.69
4H	2H	10.64	11.30	11.70	12.34	13.75	7.18	7.83	8.24	8.88	10.29
	3H	12.46	13.00	13.53	14.08	15.50	8.52	9.06	9.58	10.13	11.56
	4H	13.15	13.64	14.22	14.71	16.15	9.06	9.55	10.13	10.62	12.06
	6H	13.66	14.08	14.74	15.17	16.61	9.47	9.89	10.55	10.98	12.42
	8H	13.83	14.22	14.91	15.30	16.76	9.59	9.99	10.67	11.07	12.52
	12H	13.92	14.28	15.01	15.37	16.83	9.65	10.01	10.75	11.10	12.56
8H	4H	13.11	13.51	14.19	14.59	16.04	9.33	9.73	10.41	10.81	12.26
	6H	13.67	14.00	14.77	15.12	16.57	9.84	10.17	10.94	11.29	12.74
	8H	13.88	14.17	14.99	15.27	16.74	10.02	10.31	11.13	11.41	12.89
	12H	14.01	14.27	15.13	15.36	16.88	10.14	10.39	11.25	11.49	13.00
12H	4H	13.06	13.42	14.16	14.51	15.97	9.33	9.69	10.43	10.78	12.24
	6H	13.64	13.93	14.75	15.03	16.51	9.89	10.17	11.00	11.28	12.75
	8H	13.86	14.11	14.97	15.21	16.72	10.09	10.34	11.20	11.44	12.95