

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906890

Luminaire Tested: DFN2DIP-SQ4F0-120D080US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906890
REPORT IS A COMBINATION OF REPORTS P900108 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-120D080US835-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 17280.0 lumens
Efficiency: N/A
Efficacy: 97.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 177.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906890
CATALOG NUMBER: DFN2DIP-SQ4F0-120D080US835-RLFL

Luminous Intensity Polar Plot

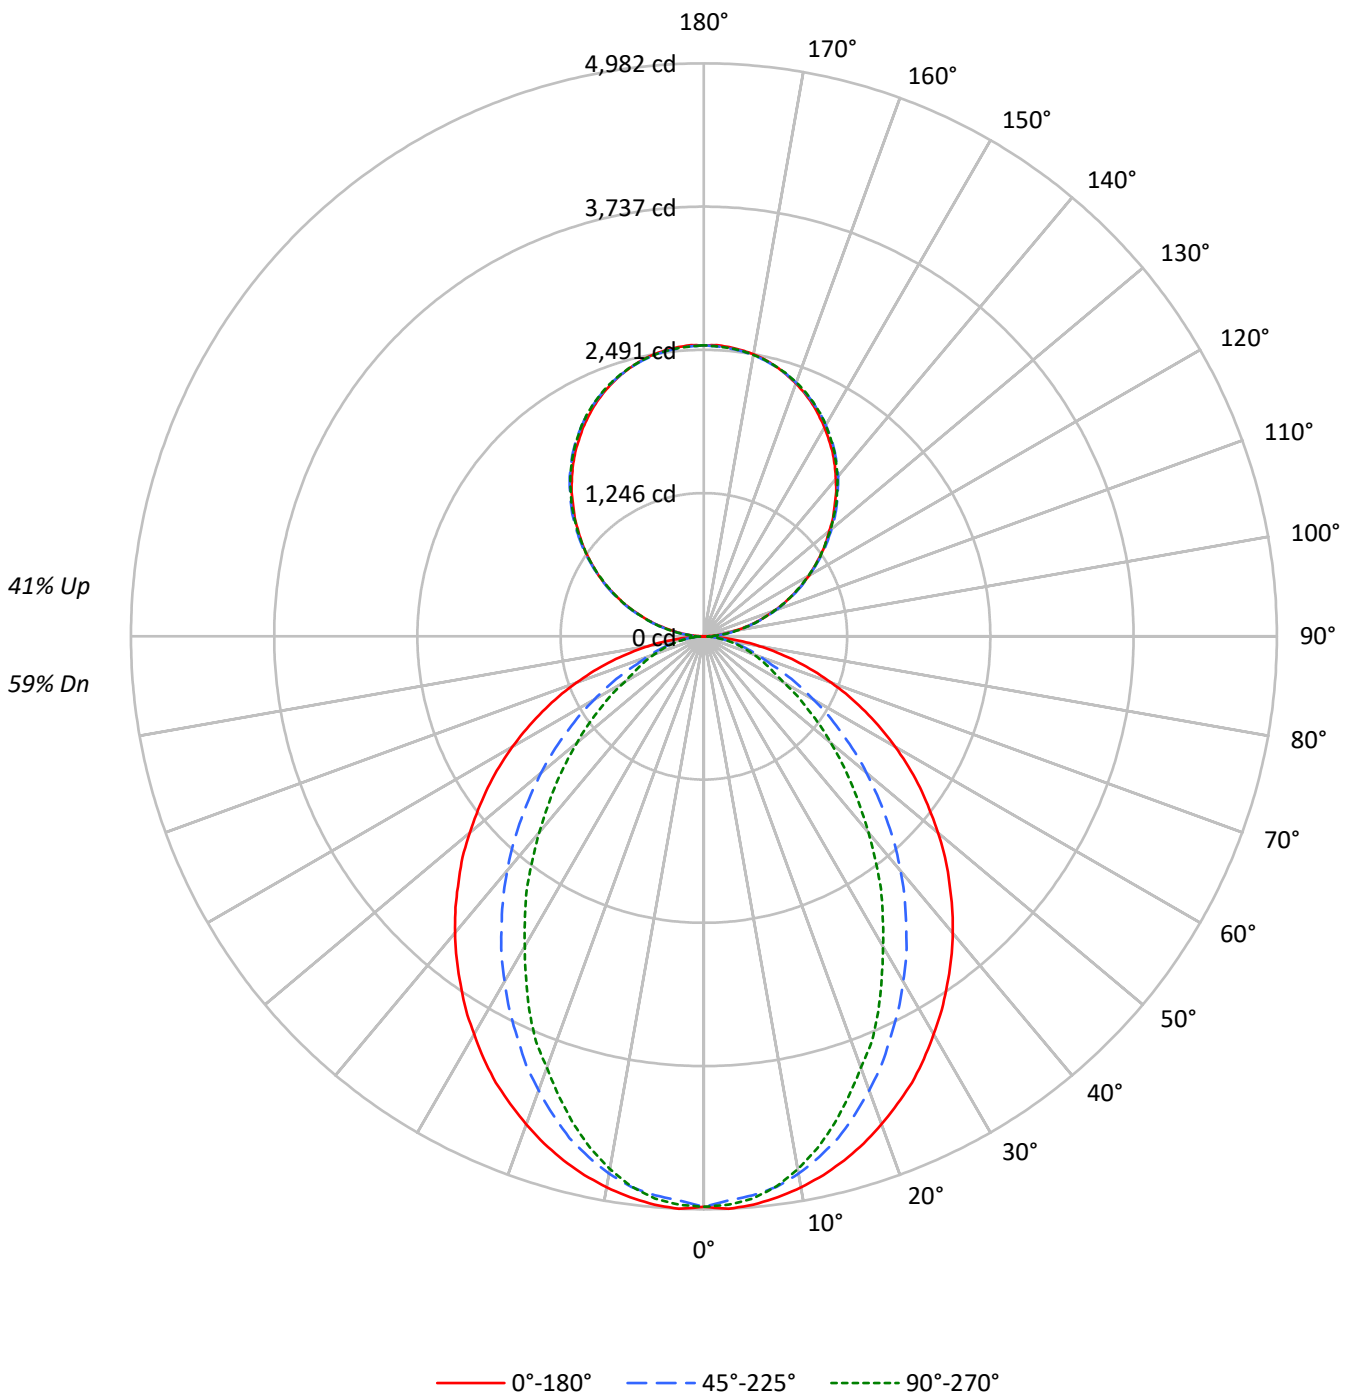



TEST NUMBER: P906890

CATALOG NUMBER: DFN2DIP-SQ4F0-120D080US835-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59			
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56	51			
2	92	85	79	74	86	79	74	70	69	65	62	60	57	55	52	50	48	44			
3	84	75	68	62	78	70	64	59	62	57	53	54	50	47	46	44	41	38			
4	77	67	59	53	72	63	56	51	55	50	46	48	44	41	42	39	36	33			
5	71	60	52	46	66	56	49	44	50	44	40	44	39	36	38	34	32	29			
6	66	54	46	40	61	51	44	39	45	39	35	40	35	32	35	31	28	26			
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25	23			
8	57	45	37	32	53	42	35	30	38	32	28	33	29	25	29	26	23	21			
9	53	41	34	29	50	39	32	27	35	29	25	31	26	23	27	24	21	19			
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	25	22	19	17			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3480	3480	3480
5°	3486	3425	3448
10°	3451	3359	3337
15°	3403	3249	3164
20°	3341	3096	2952
25°	3276	2925	2747
30°	3190	2750	2487
35°	3105	2561	2259
40°	3019	2366	1996
45°	2919	2149	1759
50°	2815	1931	1527
55°	2707	1697	1303
60°	2582	1452	1074
65°	2438	1204	968
70°	2263	971	877
75°	2044	858	800
80°	1726	722	697
85°	1202	486	531

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2919 cd/sqm



TEST NUMBER: P906890
 CATALOG NUMBER: DFN2DIP-SQ4F0-120D080US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	464.8	2.7
10°-20°	1276.0	7.4
20°-30°	1791.5	10.4
30°-40°	1952.8	11.3
40°-50°	1794.9	10.4
50°-60°	1409.6	8.2
60°-70°	917.5	5.3
70°-80°	472.3	2.7
80°-90°	127.8	0.7
90°-100°	156.6	0.9
100°-110°	497.5	2.9
110°-120°	851.3	4.9
120°-130°	1119.6	6.5
130°-140°	1256.7	7.3
140°-150°	1232.3	7.1
150°-160°	1033.7	6.0
160°-170°	685.6	4.0
170°-180°	239.6	1.4
0°-30°	3532.3	20.4
0°-40°	5485.2	31.7
0°-60°	8689.6	50.3
0°-90°	10207.2	59.1
90°-120°	1505.3	8.7
90°-150°	5113.9	29.6
90°-180°	7073.0	40.9
0°-180°	17280.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4960	4960	4960	4960	4960	
5°	4960	4937	4879	4919	4906	470
15°	4717	4668	4515	4430	4385	1329
25°	4282	4138	3842	3658	3590	1969
35°	3690	3460	3066	2783	2684	2309
45°	3016	2715	2244	1925	1818	2329
55°	2293	1943	1459	1190	1104	2049
65°	1549	1185	781	629	615	1535
75°	826	511	359	328	323	873
85°	193	99	85	85	85	221
90°	2	28	75	70	72	17
95°	111	133	136	136	133	124
105°	459	465	470	474	474	485
115°	854	866	863	860	854	845
125°	1242	1262	1256	1249	1246	1110
135°	1607	1631	1635	1633	1627	1242
145°	1951	1966	1979	1981	1972	1219
155°	2231	2237	2244	2255	2248	1027
165°	2427	2425	2425	2440	2429	685
175°	2526	2519	2515	2530	2517	240
180°	2530	2530	2530	2530	2530	



TEST NUMBER: P906890

CATALOG NUMBER: DFN2DIP-SQ4F0-120D080US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4959.6	4959.6	4959.6	4959.6	4959.6
2.5°	4982.0	4959.6	4910.1	4955.3	4946.2
5°	4959.6	4937.2	4878.6	4919.1	4905.8
7.5°	4919.1	4892.4	4829.6	4847.2	4824.8
10°	4865.3	4833.9	4744.3	4730.5	4703.9
12.5°	4798.1	4757.7	4636.2	4609.6	4560.1
15°	4717.2	4667.7	4515.3	4430.0	4385.3
17.5°	4622.9	4551.0	4362.4	4263.9	4192.0
20°	4515.3	4425.3	4201.0	4089.1	3990.0
22.5°	4398.6	4295.3	4034.8	3882.4	3815.3
25°	4282.0	4138.1	3841.9	3658.1	3590.5
27.5°	4142.9	3990.0	3662.4	3451.5	3348.1
30°	3994.8	3823.9	3464.8	3236.2	3114.8
32.5°	3851.0	3644.3	3276.7	3007.2	2894.8
35°	3689.6	3460.5	3065.7	2782.9	2683.8
37.5°	3532.4	3285.3	2868.1	2558.1	2446.2
40°	3366.2	3097.2	2661.5	2342.9	2226.2
42.5°	3195.7	2908.6	2455.3	2122.9	2011.0
45°	3016.2	2715.3	2244.3	1925.3	1817.6
47.5°	2845.7	2527.2	2042.4	1723.4	1624.8
50°	2657.2	2338.6	1844.8	1534.8	1441.0
52.5°	2472.9	2136.2	1656.2	1360.0	1274.8
55°	2293.4	1943.4	1458.6	1189.5	1104.3
57.5°	2109.5	1750.5	1283.8	1032.4	960.5
60°	1921.0	1561.9	1099.5	871.0	799.1
62.5°	1737.2	1378.1	942.4	727.2	691.4
65°	1548.6	1184.8	781.0	628.6	614.8
67.5°	1369.1	1005.2	628.6	551.9	538.6
70°	1180.5	830.5	520.5	475.7	457.6
72.5°	1001.0	668.6	435.2	399.5	390.5
75°	825.7	511.4	359.1	327.6	323.3
77.5°	651.0	363.3	282.9	264.8	255.7
80°	489.1	260.5	215.2	197.6	197.6
82.5°	341.0	175.2	148.1	139.0	139.0
85°	192.9	98.6	85.2	85.2	85.2
87.5°	71.9	35.7	35.7	31.4	31.4
90°	2.3	27.5	74.8	70.2	72.5
92.5°	47.3	64.1	66.4	68.6	68.6
95°	111.4	132.7	136.5	136.5	132.7
97.5°	185.4	205.2	213.6	213.6	213.6
100°	270.8	288.3	294.4	294.4	292.1
102.5°	360.8	373.8	382.1	384.4	382.1
105°	459.2	465.3	469.9	473.7	473.7
107.5°	556.8	566.0	566.0	567.5	556.8
110°	651.4	663.6	663.6	663.6	657.5



TEST NUMBER: P906890

CATALOG NUMBER: DFN2DIP-SQ4F0-120D080US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	753.6	766.6	764.3	758.2	753.6
115°	854.3	866.5	862.7	860.4	854.3
117.5°	954.2	971.0	960.3	954.2	948.1
120°	1054.9	1071.7	1054.9	1054.9	1048.0
122.5°	1146.4	1167.8	1157.1	1151.0	1146.4
125°	1242.5	1261.6	1255.5	1248.6	1246.4
127.5°	1336.4	1360.0	1351.6	1342.5	1336.4
130°	1424.1	1451.5	1447.7	1443.2	1434.8
132.5°	1522.5	1543.8	1545.4	1534.7	1528.6
135°	1607.1	1630.8	1635.4	1633.1	1627.0
137.5°	1701.7	1720.8	1724.6	1723.1	1713.9
140°	1784.9	1803.9	1814.6	1814.6	1806.2
142.5°	1870.3	1889.4	1895.5	1897.8	1889.4
145°	1951.2	1966.4	1978.6	1980.9	1972.5
147.5°	2023.6	2042.7	2051.8	2055.7	2047.3
150°	2098.4	2111.3	2119.7	2126.6	2119.7
152.5°	2164.7	2177.7	2188.4	2196.8	2188.4
155°	2231.1	2237.2	2244.1	2254.7	2247.9
157.5°	2288.3	2292.9	2296.7	2311.9	2301.3
160°	2339.4	2344.0	2346.3	2359.2	2350.1
162.5°	2386.7	2386.7	2389.0	2403.5	2392.8
165°	2427.1	2424.8	2424.8	2440.1	2429.4
167.5°	2463.7	2456.9	2456.9	2472.1	2461.4
170°	2491.2	2485.1	2482.8	2498.1	2485.1
172.5°	2510.3	2504.2	2501.9	2517.1	2504.2
175°	2525.5	2519.4	2514.8	2530.1	2517.1
177.5°	2533.9	2527.8	2523.2	2536.2	2523.2
180°	2530.1	2530.1	2530.1	2530.1	2530.1



TEST NUMBER: P906890
 CATALOG NUMBER: DFN2DIP-SQ4F0-120D080US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.30	13.21	13.18	14.11	15.24	8.26	9.17	9.14	10.07	11.21
	3H	13.99	14.80	14.88	15.71	16.87	9.45	10.27	10.35	11.18	12.34
	4H	14.60	15.37	15.51	16.28	17.46	9.91	10.68	10.82	11.59	12.76
	6H	15.03	15.74	15.95	16.66	17.84	10.23	10.94	11.16	11.86	13.05
	8H	15.16	15.83	16.09	16.77	17.96	10.33	11.00	11.26	11.94	13.12
	12H	15.23	15.87	16.16	16.80	18.01	10.37	11.01	11.31	11.94	13.15
4H	2H	12.33	13.09	13.24	14.01	15.18	8.87	9.64	9.78	10.55	11.72
	3H	14.17	14.81	15.09	15.75	16.94	10.22	10.86	11.15	11.81	13.00
	4H	14.87	15.45	15.80	16.39	17.60	10.78	11.36	11.71	12.30	13.51
	6H	15.39	15.89	16.34	16.85	18.07	11.20	11.70	12.15	12.66	13.88
	8H	15.57	16.04	16.52	16.99	18.22	11.33	11.80	12.28	12.76	13.98
	12H	15.67	16.09	16.64	17.07	18.30	11.40	11.82	12.37	12.80	14.03
8H	4H	14.84	15.31	15.79	16.26	17.49	11.07	11.53	12.02	12.49	13.72
	6H	15.41	15.80	16.39	16.80	18.02	11.59	11.97	12.56	12.97	14.20
	8H	15.63	15.97	16.62	16.96	18.21	11.78	12.12	12.77	13.11	14.35
	12H	15.78	16.08	16.77	17.06	18.35	11.90	12.20	12.89	13.18	14.48
12H	4H	14.80	15.22	15.77	16.19	17.42	11.07	11.50	12.04	12.47	13.70
	6H	15.39	15.73	16.38	16.72	17.96	11.64	11.98	12.62	12.97	14.21
	8H	15.62	15.92	16.61	16.90	18.19	11.85	12.15	12.84	13.13	14.43