

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907118

Luminaire Tested: DFN2DIP-TR3F0-040D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907118
REPORT IS A COMBINATION OF REPORTS P900287 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-040D040US835-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7500.0 lumens
Efficiency: N/A
Efficacy: 116.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 64.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907118
CATALOG NUMBER: DFN2DIP-TR3F0-040D040US835-FLLFLL

Luminous Intensity Polar Plot

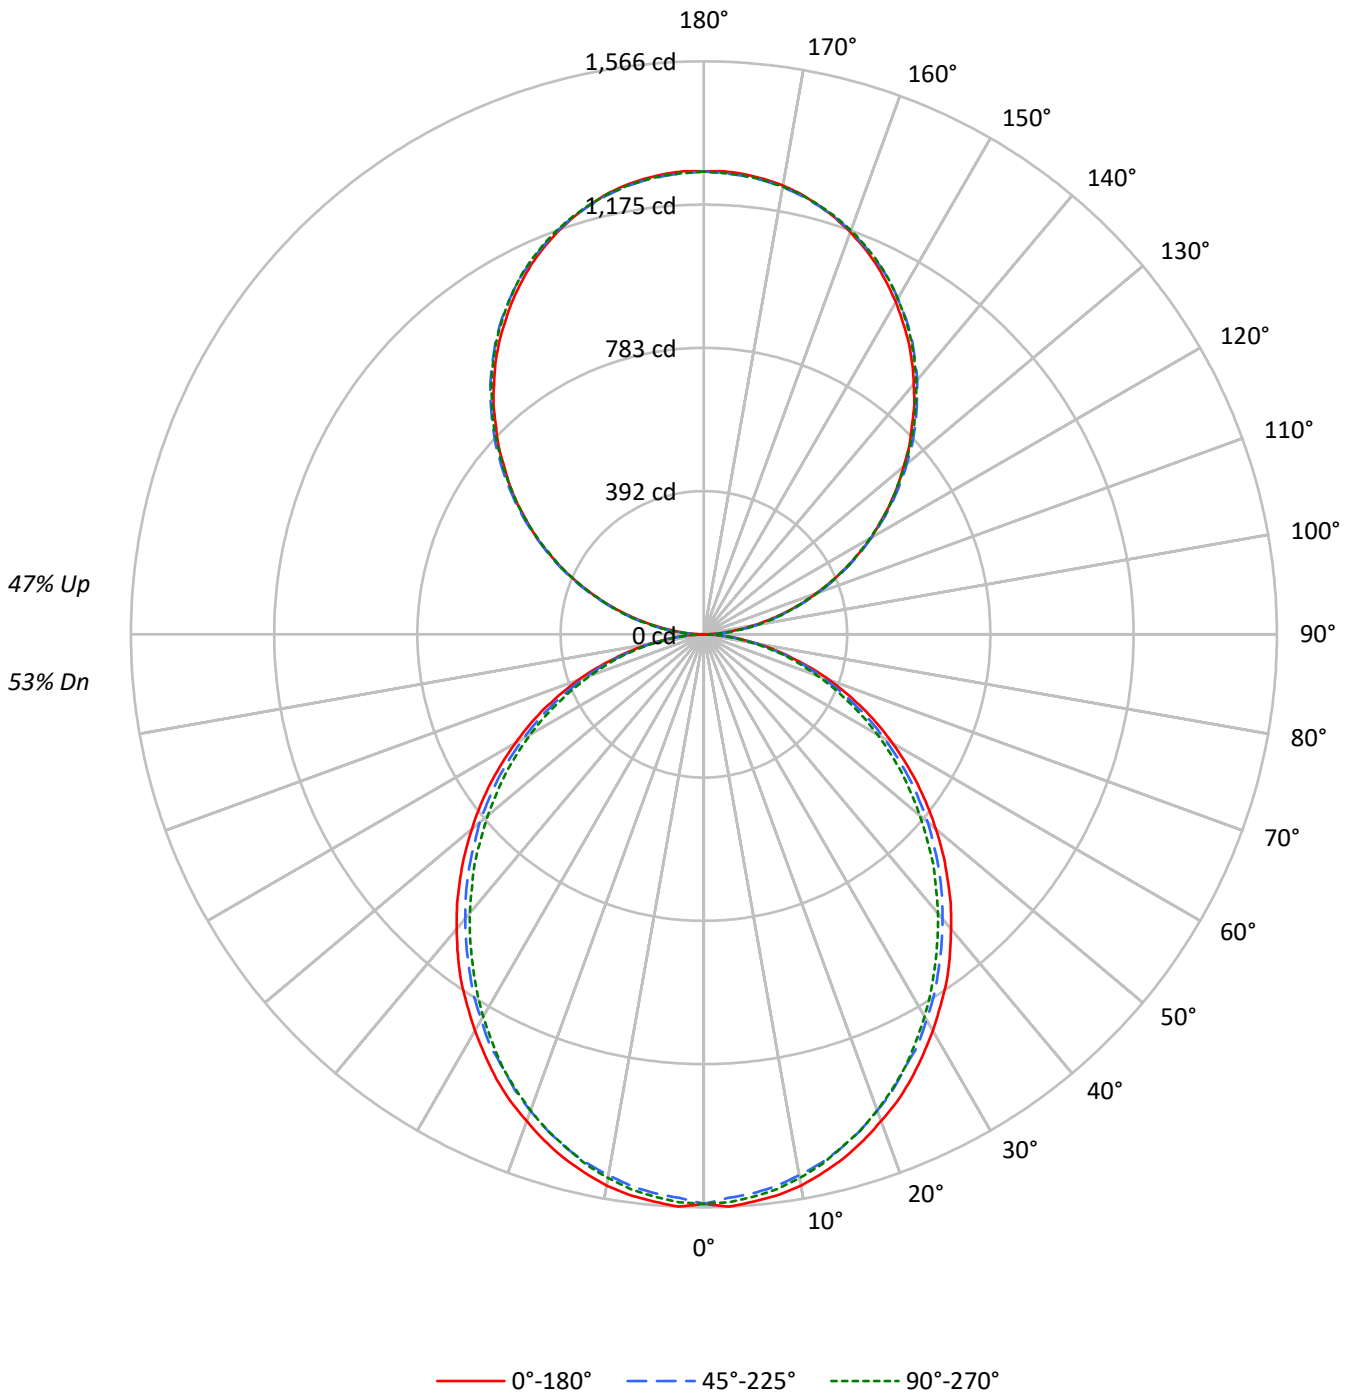



TEST NUMBER: P907118

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1939	1939	1939
5°	1941	1911	1924
10°	1925	1883	1897
15°	1895	1851	1855
20°	1856	1806	1812
25°	1817	1753	1762
30°	1768	1703	1700
35°	1722	1645	1634
40°	1665	1586	1571
45°	1608	1527	1506
50°	1546	1465	1432
55°	1481	1393	1363
60°	1407	1308	1284
65°	1327	1220	1191
70°	1224	1112	1090
75°	1082	983	996
80°	911	818	818
85°	644	538	528

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1608 cd/sqm



TEST NUMBER: P907118

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	2.0
10°-20°	412.2	5.5
20°-30°	605.7	8.1
30°-40°	703.5	9.4
40°-50°	702.6	9.4
50°-60°	612.7	8.2
60°-70°	452.9	6.0
70°-80°	256.2	3.4
80°-90°	71.2	0.9
90°-100°	78.3	1.0
100°-110°	248.7	3.3
110°-120°	425.6	5.7
120°-130°	559.8	7.5
130°-140°	628.3	8.4
140°-150°	616.2	8.2
150°-160°	516.9	6.9
160°-170°	342.8	4.6
170°-180°	119.8	1.6
0°-30°	1164.4	15.5
0°-40°	1867.9	24.9
0°-60°	3183.2	42.4
0°-90°	3963.6	52.8
90°-120°	752.7	10.0
90°-150°	2556.9	34.1
90°-180°	3536.0	47.1
0°-180°	7500.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	1	14	37	35	36	7
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	



TEST NUMBER: P907118

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US835-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8



TEST NUMBER: P907118

CATALOG NUMBER: DFN2DIP-TR3F0-040D040US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0



TEST NUMBER: P907118
 CATALOG NUMBER: DFN2DIP-TR3F0-040D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.78	10.67	10.71	11.62	12.85	9.35	10.24	10.28	11.19	12.42
	3H	11.43	12.23	12.38	13.19	14.44	10.96	11.76	11.91	12.72	13.97
	4H	12.02	12.77	12.97	13.73	14.99	11.55	12.30	12.51	13.26	14.53
	6H	12.41	13.10	13.38	14.07	15.35	11.94	12.63	12.91	13.60	14.88
	8H	12.51	13.17	13.49	14.16	15.43	12.04	12.70	13.02	13.69	14.96
	12H	12.56	13.19	13.54	14.17	15.46	12.08	12.71	13.06	13.69	14.99
4H	2H	10.24	10.99	11.20	11.96	13.22	9.90	10.65	10.86	11.62	12.88
	3H	12.10	12.73	13.07	13.72	15.00	11.71	12.34	12.68	13.33	14.61
	4H	12.81	13.38	13.79	14.37	15.67	12.41	12.98	13.39	13.97	15.27
	6H	13.31	13.81	14.31	14.82	16.12	12.91	13.41	13.91	14.42	15.71
	8H	13.46	13.92	14.46	14.93	16.24	13.05	13.52	14.05	14.52	15.83
	12H	13.53	13.95	14.55	14.97	16.29	13.11	13.53	14.13	14.55	15.87
8H	4H	13.00	13.46	14.00	14.47	15.78	12.64	13.11	13.64	14.11	15.42
	6H	13.62	14.01	14.64	15.05	16.36	13.26	13.65	14.29	14.69	16.00
	8H	13.84	14.18	14.87	15.21	16.54	13.47	13.81	14.50	14.84	16.17
	12H	13.96	14.26	15.00	15.29	16.66	13.59	13.88	14.62	14.91	16.28
12H	4H	12.99	13.41	14.00	14.43	15.74	12.64	13.06	13.65	14.08	15.39
	6H	13.65	13.99	14.68	15.02	16.35	13.30	13.64	14.33	14.67	16.00
	8H	13.89	14.18	14.92	15.21	16.58	13.53	13.83	14.57	14.86	16.23