

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920855

Luminaire Tested: DFN2DIP-TR3F0-070D080US935-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920855
REPORT IS A COMBINATION OF REPORTS P901870 AND P898751
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-070D080US935-RLLONL
Description: 3 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11942.0 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 131.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920855
CATALOG NUMBER: DFN2DIP-TR3F0-070D080US935-RLLONL

Luminous Intensity Polar Plot

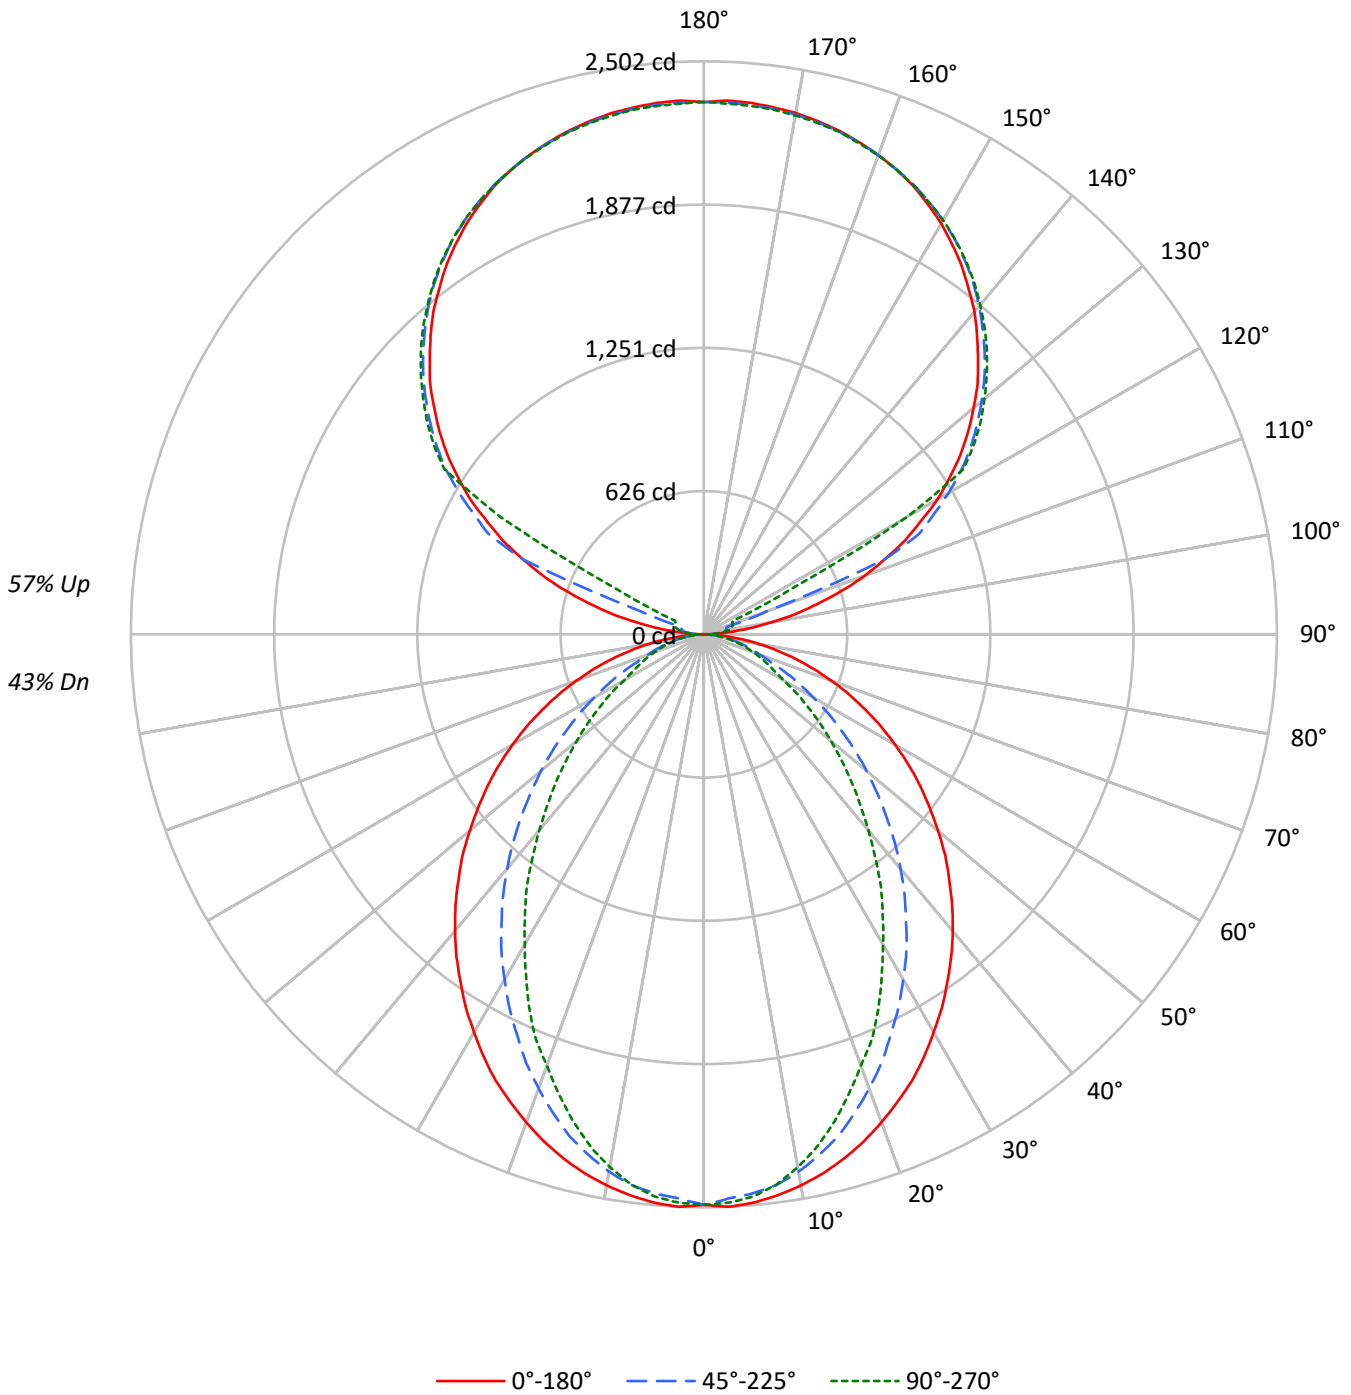



TEST NUMBER: P920855

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43				43
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	44	43	37				37
2	88	81	75	70	81	75	70	65	62	58	55	50	48	46	40	38	37	32				32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	33	32	27				27
4	74	64	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28	24				24
5	68	57	49	43	62	53	46	41	44	39	35	36	33	30	29	26	24	21				21
6	63	51	43	38	57	47	40	35	40	35	31	33	29	26	26	24	22	19				19
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19	17				17
8	54	42	35	29	49	39	32	28	33	28	24	28	24	21	22	20	17	15				15
9	50	38	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16	14				14
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	16	14	12				12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3104	3104	3104
5°	3107	3052	3072
10°	3075	2990	2970
15°	3031	2888	2814
20°	2973	2750	2623
25°	2914	2595	2438
30°	2835	2436	2204
35°	2758	2266	1999
40°	2679	2090	1765
45°	2588	1895	1552
50°	2493	1698	1345
55°	2394	1489	1145
60°	2279	1270	941
65°	2147	1048	844
70°	1987	841	761
75°	1786	736	688
80°	1494	609	590
85°	1017	394	432

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2588 cd/sqm



TEST NUMBER: P920855

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	233.5	2.0
10°-20°	640.9	5.4
20°-30°	899.8	7.5
30°-40°	980.8	8.2
40°-50°	901.5	7.5
50°-60°	708.0	5.9
60°-70°	460.8	3.9
70°-80°	237.2	2.0
80°-90°	64.6	0.5
90°-100°	76.7	0.6
100°-110°	285.7	2.4
110°-120°	757.9	6.3
120°-130°	1256.9	10.5
130°-140°	1335.2	11.2
140°-150°	1240.9	10.4
150°-160°	997.6	8.4
160°-170°	642.8	5.4
170°-180°	221.3	1.9
0°-30°	1774.1	14.9
0°-40°	2754.9	23.1
0°-60°	4364.3	36.5
0°-90°	5127.0	42.9
90°-120°	1120.2	9.4
90°-150°	4953.3	41.5
90°-180°	6815.0	57.1
0°-180°	11942.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2491	2491	2491	2491	2491	
5°	2491	2480	2450	2471	2464	236
15°	2369	2344	2268	2225	2202	668
25°	2151	2078	1930	1837	1803	989
35°	1853	1738	1540	1398	1348	1160
45°	1515	1364	1127	967	913	1170
55°	1152	976	732	597	555	1029
65°	778	595	392	316	309	771
75°	415	257	180	164	162	439
85°	97	50	43	43	43	111
90°	2	20	34	42	45	11
95°	109	54	66	74	72	129
105°	511	562	103	121	128	546
115°	967	996	1038	259	138	952
125°	1367	1389	1421	1433	1438	1220
135°	1692	1719	1734	1751	1748	1307
145°	1963	1961	1990	2002	1993	1228
155°	2161	2146	2167	2177	2163	996
165°	2278	2268	2272	2284	2272	643
175°	2330	2318	2321	2333	2316	222
180°	2325	2325	2325	2325	2325	



TEST NUMBER: P920855

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2491.0	2491.0	2491.0	2491.0	2491.0
2.5°	2502.1	2491.0	2466.1	2488.8	2484.2
5°	2491.0	2479.7	2450.3	2470.6	2463.9
7.5°	2470.6	2457.2	2425.7	2434.5	2423.3
10°	2443.6	2427.8	2382.8	2375.9	2362.5
12.5°	2409.8	2389.5	2328.6	2315.1	2290.3
15°	2369.2	2344.3	2267.8	2225.0	2202.5
17.5°	2321.9	2285.8	2191.1	2141.5	2105.4
20°	2267.8	2222.6	2110.0	2053.7	2004.0
22.5°	2209.2	2157.3	2026.4	1949.9	1916.2
25°	2150.6	2078.4	1929.6	1837.3	1803.4
27.5°	2080.8	2004.0	1839.4	1733.5	1681.6
30°	2006.4	1920.5	1740.2	1625.4	1564.4
32.5°	1934.1	1830.4	1645.7	1510.4	1453.9
35°	1853.0	1738.0	1539.8	1397.7	1348.0
37.5°	1774.2	1650.0	1440.5	1284.8	1228.6
40°	1690.7	1555.6	1336.7	1176.7	1118.1
42.5°	1605.1	1460.9	1233.1	1066.2	1010.0
45°	1514.9	1363.7	1127.2	967.0	912.9
47.5°	1429.3	1269.3	1025.8	865.6	816.1
50°	1334.5	1174.6	926.5	770.9	723.8
52.5°	1242.0	1072.9	831.8	683.0	640.2
55°	1151.8	976.0	732.5	597.4	554.7
57.5°	1059.5	879.2	644.8	518.5	482.4
60°	964.8	784.5	552.2	437.5	401.3
62.5°	872.4	692.2	473.3	365.2	347.2
65°	777.7	595.0	392.3	315.7	308.8
67.5°	687.6	504.9	315.7	277.2	270.5
70°	592.9	417.1	261.4	238.9	229.8
72.5°	502.7	335.8	218.6	200.7	196.1
75°	414.7	256.8	180.3	164.5	162.4
77.5°	326.9	182.4	142.1	132.9	128.5
80°	245.6	130.8	108.1	99.3	99.3
82.5°	171.3	88.0	74.4	69.8	69.8
85°	96.9	49.5	42.8	42.8	42.8
87.5°	36.1	17.9	17.9	15.8	15.8
90°	1.6	20.1	33.6	42.1	45.4
92.5°	42.1	35.4	40.4	43.7	45.4
95°	109.3	53.7	65.5	74.1	72.3
97.5°	196.7	58.9	85.7	90.9	92.5
100°	297.8	67.3	95.9	109.3	112.6
102.5°	408.7	405.4	99.3	117.6	122.9
105°	511.3	561.9	102.6	121.1	127.9
107.5°	630.8	672.7	106.1	124.4	131.2
110°	745.3	780.4	294.5	126.2	132.9



TEST NUMBER: P920855

CATALOG NUMBER: DFN2DIP-TR3F0-070D080US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	852.9	883.0	854.5	129.4	134.7
115°	967.2	995.7	1037.8	259.1	138.0
117.5°	1066.4	1100.0	1128.8	888.0	447.5
120°	1177.5	1202.6	1233.0	1253.2	1026.1
122.5°	1271.5	1298.6	1332.3	1342.3	1344.1
125°	1367.4	1389.4	1421.3	1433.1	1438.1
127.5°	1454.9	1478.5	1503.9	1520.6	1522.2
130°	1537.4	1564.3	1582.8	1601.4	1599.7
132.5°	1621.5	1643.5	1661.9	1677.1	1675.4
135°	1692.2	1719.2	1734.1	1751.2	1747.7
137.5°	1766.2	1786.3	1803.3	1820.1	1815.1
140°	1838.4	1852.0	1870.4	1885.6	1877.1
142.5°	1899.2	1910.9	1932.7	1946.1	1937.7
145°	1963.1	1961.3	1989.9	2001.6	1993.2
147.5°	2018.4	2013.4	2041.9	2050.4	2043.8
150°	2072.3	2060.5	2087.5	2097.5	2089.1
152.5°	2117.7	2104.3	2129.4	2139.7	2127.9
155°	2161.4	2146.5	2166.6	2176.6	2163.3
157.5°	2196.7	2183.4	2198.6	2210.4	2196.7
160°	2227.1	2217.0	2227.1	2237.1	2225.3
162.5°	2253.9	2243.9	2252.3	2264.1	2248.9
165°	2277.5	2267.5	2272.5	2284.2	2272.5
167.5°	2296.0	2285.9	2291.0	2302.8	2287.7
170°	2311.3	2301.0	2304.5	2316.3	2301.0
172.5°	2321.3	2311.3	2314.6	2326.4	2311.3
175°	2329.6	2317.8	2321.3	2333.0	2316.3
177.5°	2333.0	2321.3	2323.0	2334.8	2319.6
180°	2324.6	2324.6	2324.6	2324.6	2324.6



TEST NUMBER: P920855
 CATALOG NUMBER: DFN2DIP-TR3F0-070D080US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.33	11.11	11.36	12.13	13.51	6.31	7.09	7.33	8.11	9.48
	3H	12.00	12.69	13.03	13.73	15.12	7.49	8.18	8.52	9.22	10.61
	4H	12.60	13.25	13.64	14.29	15.69	7.93	8.59	8.98	9.63	11.03
	6H	13.01	13.61	14.06	14.65	16.06	8.25	8.85	9.30	9.89	11.30
	8H	13.13	13.70	14.19	14.76	16.17	8.33	8.91	9.39	9.96	11.37
	12H	13.18	13.73	14.25	14.78	16.21	8.37	8.92	9.44	9.97	11.40
4H	2H	10.34	11.00	11.39	12.04	13.44	6.89	7.55	7.94	8.59	9.99
	3H	12.16	12.70	13.22	13.77	15.18	8.23	8.78	9.29	9.84	11.25
	4H	12.84	13.34	13.90	14.40	15.83	8.77	9.27	9.84	10.33	11.76
	6H	13.34	13.77	14.42	14.85	16.28	9.18	9.61	10.26	10.69	12.12
	8H	13.51	13.91	14.59	14.98	16.43	9.31	9.71	10.38	10.78	12.22
	12H	13.60	13.96	14.69	15.05	16.49	9.37	9.73	10.46	10.81	12.26
8H	4H	12.80	13.20	13.88	14.27	15.72	9.04	9.44	10.12	10.52	11.96
	6H	13.36	13.69	14.45	14.80	16.24	9.55	9.88	10.65	11.00	12.44
	8H	13.57	13.86	14.67	14.95	16.41	9.74	10.03	10.84	11.12	12.59
	12H	13.70	13.95	14.80	15.04	16.54	9.85	10.10	10.96	11.20	12.70
12H	4H	12.75	13.11	13.84	14.20	15.65	9.04	9.41	10.14	10.49	11.94
	6H	13.33	13.62	14.43	14.72	16.18	9.60	9.89	10.70	10.99	12.45
	8H	13.54	13.80	14.65	14.89	16.39	9.80	10.06	10.91	11.15	12.65