

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P926334

Luminaire Tested: DFN2DIP-TR3F0-080D080US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P926334
REPORT IS A COMBINATION OF REPORTS P900351 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-080D080US950-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14310.0 lumens
Efficiency: N/A
Efficacy: 100.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 142
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P926334
CATALOG NUMBER: DFN2DIP-TR3F0-080D080US950-FLLFLL

Luminous Intensity Polar Plot

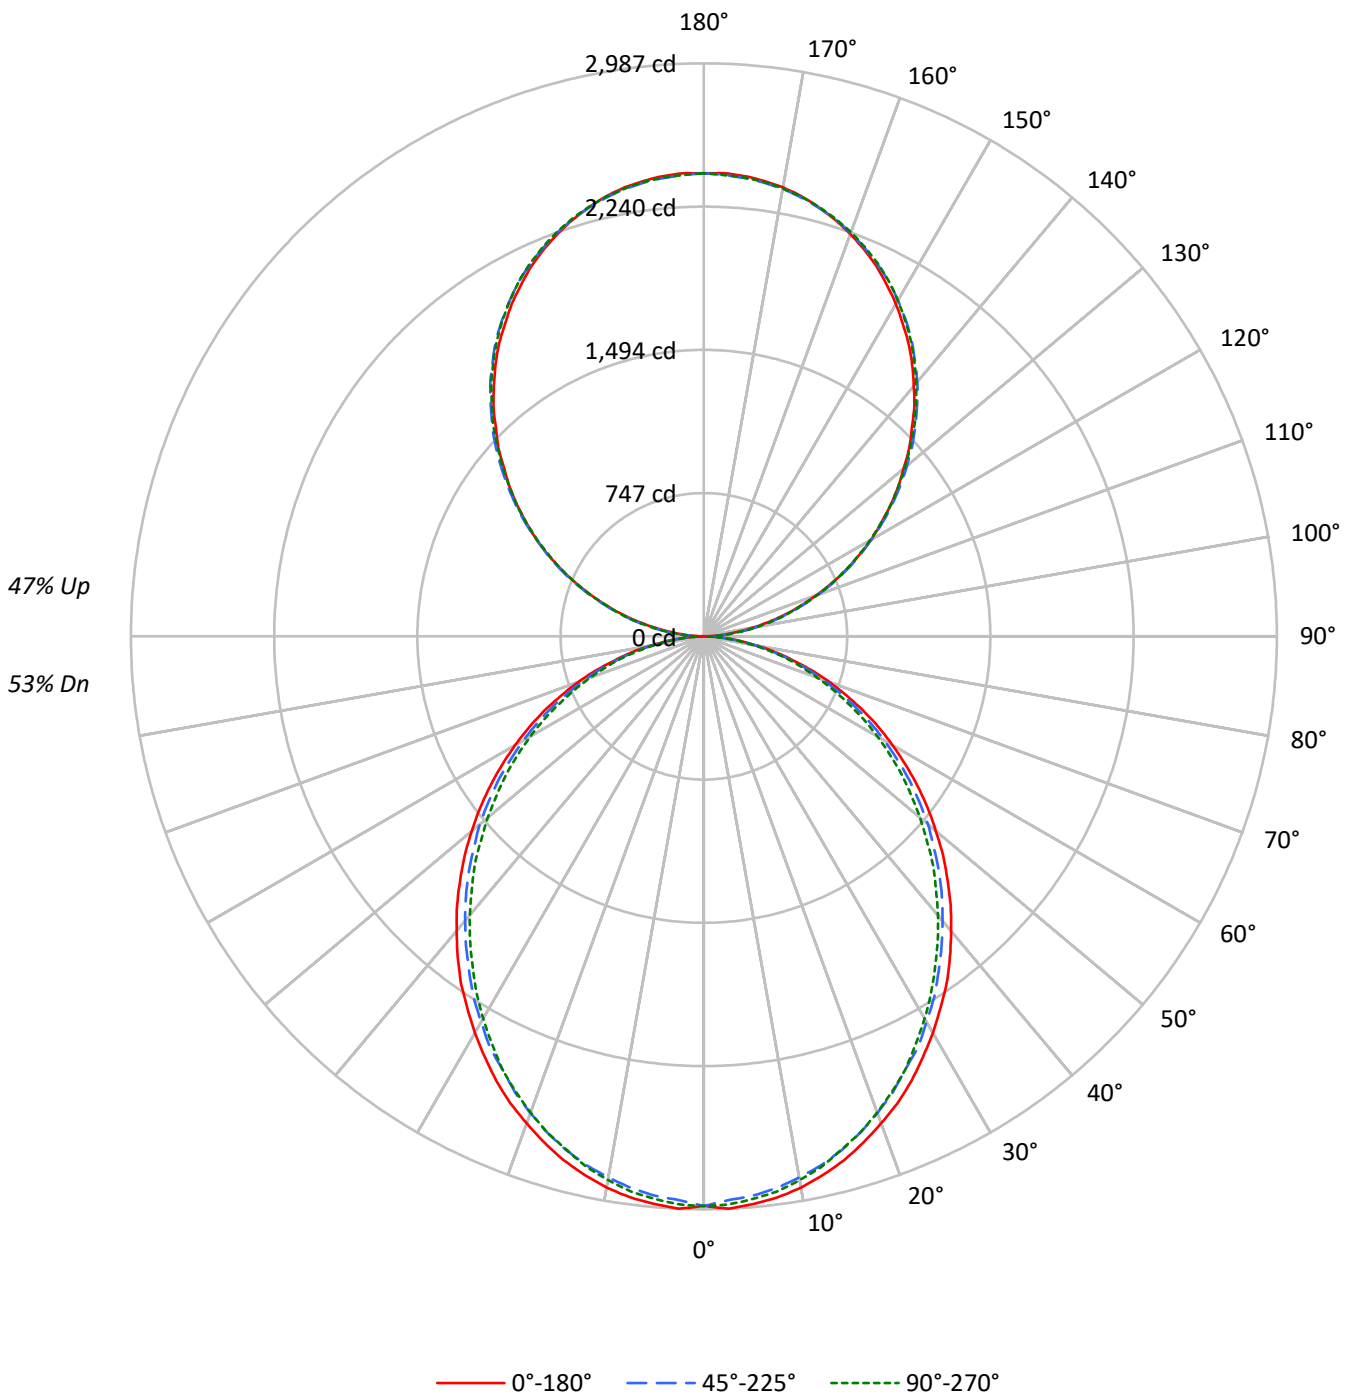



TEST NUMBER: P926334

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US950-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3700	3700	3700
5°	3704	3646	3671
10°	3672	3594	3619
15°	3616	3531	3539
20°	3541	3446	3457
25°	3467	3345	3363
30°	3374	3250	3243
35°	3285	3139	3117
40°	3177	3027	2997
45°	3068	2914	2874
50°	2950	2795	2732
55°	2826	2658	2600
60°	2685	2496	2450
65°	2531	2327	2272
70°	2336	2122	2080
75°	2065	1875	1900
80°	1738	1560	1561
85°	1228	1028	1008

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3068 cd/sqm



TEST NUMBER: P926334

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	279.5	2.0
10°-20°	786.4	5.5
20°-30°	1155.7	8.1
30°-40°	1342.3	9.4
40°-50°	1340.6	9.4
50°-60°	1169.0	8.2
60°-70°	864.1	6.0
70°-80°	488.9	3.4
80°-90°	135.9	0.9
90°-100°	149.4	1.0
100°-110°	474.6	3.3
110°-120°	812.1	5.7
120°-130°	1068.1	7.5
130°-140°	1198.9	8.4
140°-150°	1175.6	8.2
150°-160°	986.2	6.9
160°-170°	654.0	4.6
170°-180°	228.6	1.6
0°-30°	2221.6	15.5
0°-40°	3563.9	24.9
0°-60°	6073.6	42.4
0°-90°	7562.5	52.8
90°-120°	1436.1	10.0
90°-150°	4878.6	34.1
90°-180°	6747.0	47.1
0°-180°	14310.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2970	2970	2970	2970	2970	
5°	2970	2958	2927	2950	2944	282
15°	2827	2810	2773	2784	2770	796
25°	2558	2536	2487	2493	2487	1177
35°	2207	2179	2133	2116	2102	1378
45°	1796	1776	1733	1702	1691	1386
55°	1359	1342	1308	1274	1259	1215
65°	917	900	871	845	831	906
75°	480	474	460	443	448	512
85°	117	114	112	103	100	130
90°	2	26	71	67	69	14
95°	106	127	130	130	127	118
105°	438	444	448	452	452	462
115°	815	827	823	821	815	806
125°	1185	1204	1198	1191	1189	1059
135°	1533	1556	1560	1558	1552	1185
145°	1861	1876	1888	1890	1882	1163
155°	2128	2134	2141	2151	2144	980
165°	2316	2313	2313	2328	2318	653
175°	2409	2404	2399	2414	2401	229
180°	2414	2414	2414	2414	2414	



TEST NUMBER: P926334

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2969.6	2969.6	2969.6	2969.6	2969.6
2.5°	2986.9	2972.7	2941.2	2969.6	2964.2
5°	2969.6	2958.4	2927.0	2949.7	2944.2
7.5°	2949.7	2932.7	2901.2	2924.2	2918.5
10°	2918.5	2898.4	2864.2	2886.9	2878.5
12.5°	2875.5	2858.5	2824.2	2838.4	2832.7
15°	2827.0	2810.0	2772.7	2784.2	2770.0
17.5°	2767.0	2750.0	2712.7	2727.0	2712.7
20°	2701.3	2684.3	2644.3	2652.8	2641.5
22.5°	2635.8	2610.0	2572.7	2572.7	2567.0
25°	2558.5	2535.8	2487.4	2492.8	2487.4
27.5°	2472.8	2452.8	2415.8	2407.3	2393.1
30°	2387.4	2364.3	2321.7	2313.2	2301.6
32.5°	2295.9	2278.9	2233.1	2215.9	2204.4
35°	2207.4	2178.9	2133.1	2115.9	2101.7
37.5°	2107.4	2081.6	2035.9	2015.9	2001.7
40°	2004.7	1981.6	1936.0	1910.5	1898.9
42.5°	1904.8	1881.7	1836.3	1807.4	1790.6
45°	1796.3	1776.3	1733.2	1702.0	1690.6
47.5°	1690.6	1670.5	1624.8	1593.3	1576.3
50°	1579.1	1564.8	1524.8	1484.8	1470.6
52.5°	1470.6	1450.6	1413.6	1382.2	1362.1
55°	1359.4	1342.1	1307.9	1273.7	1259.4
57.5°	1247.9	1233.7	1196.4	1162.2	1150.6
60°	1136.4	1125.2	1085.2	1053.7	1045.2
62.5°	1027.9	1008.0	979.5	951.0	939.5
65°	916.8	899.5	871.0	845.2	831.0
67.5°	802.5	788.0	762.5	742.6	731.1
70°	696.8	685.3	659.6	639.6	628.3
72.5°	588.3	576.9	562.6	542.6	534.1
75°	479.6	474.1	459.6	442.7	448.4
77.5°	382.6	371.1	365.4	356.9	348.4
80°	285.7	282.7	276.9	268.5	262.6
82.5°	194.2	194.2	191.5	179.9	179.9
85°	117.0	114.2	111.5	102.7	100.0
87.5°	51.5	45.8	40.0	31.5	28.5
90°	2.2	26.2	71.4	67.0	69.2
92.5°	45.1	61.2	63.3	65.4	65.4
95°	106.3	126.6	130.2	130.2	126.6
97.5°	176.9	195.8	203.8	203.8	203.8
100°	258.3	275.0	280.9	280.9	278.7
102.5°	344.2	356.6	364.5	366.7	364.5
105°	438.1	443.9	448.3	451.9	451.9
107.5°	531.2	540.0	540.0	541.4	531.2
110°	621.4	633.1	633.1	633.1	627.3



TEST NUMBER: P926334

CATALOG NUMBER: DFN2DIP-TR3F0-080D080US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	718.9	731.3	729.1	723.3	718.9
115°	815.0	826.6	823.0	820.8	815.0
117.5°	910.3	926.3	916.1	910.3	904.5
120°	1006.4	1022.4	1006.4	1006.4	999.8
122.5°	1093.7	1114.1	1103.9	1098.1	1093.7
125°	1185.3	1203.6	1197.7	1191.2	1189.1
127.5°	1274.9	1297.4	1289.4	1280.7	1274.9
130°	1358.6	1384.7	1381.1	1376.8	1368.8
132.5°	1452.5	1472.8	1474.3	1464.1	1458.3
135°	1533.2	1555.8	1560.2	1558.0	1552.2
137.5°	1623.4	1641.6	1645.3	1643.8	1635.1
140°	1702.8	1720.9	1731.1	1731.1	1723.1
142.5°	1784.3	1802.5	1808.3	1810.5	1802.5
145°	1861.4	1875.9	1887.6	1889.8	1881.8
147.5°	1930.5	1948.7	1957.4	1961.1	1953.1
150°	2001.9	2014.2	2022.2	2028.8	2022.2
152.5°	2065.1	2077.5	2087.7	2095.7	2087.7
155°	2128.5	2134.3	2140.9	2151.0	2144.5
157.5°	2183.0	2187.4	2191.1	2205.6	2195.4
160°	2231.8	2236.2	2238.4	2250.7	2242.0
162.5°	2276.9	2276.9	2279.1	2292.9	2282.7
165°	2315.5	2313.3	2313.3	2327.9	2317.6
167.5°	2350.4	2343.9	2343.9	2358.4	2348.2
170°	2376.6	2370.8	2368.6	2383.2	2370.8
172.5°	2394.8	2389.0	2386.8	2401.3	2389.0
175°	2409.3	2403.5	2399.1	2413.7	2401.3
177.5°	2417.3	2411.5	2407.1	2419.5	2407.1
180°	2413.7	2413.7	2413.7	2413.7	2413.7



TEST NUMBER: P926334
 CATALOG NUMBER: DFN2DIP-TR3F0-080D080US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.02	12.91	12.96	13.86	15.09	11.60	12.48	12.53	13.43	14.66
	3H	13.68	14.47	14.62	15.43	16.69	13.21	14.01	14.15	14.96	16.22
	4H	14.26	15.01	15.22	15.98	17.24	13.79	14.55	14.75	15.51	16.77
	6H	14.65	15.35	15.62	16.32	17.59	14.18	14.88	15.15	15.85	17.12
	8H	14.76	15.42	15.73	16.40	17.68	14.29	14.95	15.26	15.93	17.21
	12H	14.80	15.43	15.78	16.41	17.71	14.33	14.96	15.31	15.94	17.23
4H	2H	12.49	13.24	13.45	14.20	15.46	12.14	12.90	13.11	13.86	15.12
	3H	14.34	14.97	15.32	15.97	17.24	13.95	14.58	14.93	15.58	16.85
	4H	15.05	15.63	16.03	16.61	17.91	14.65	15.23	15.63	16.21	17.51
	6H	15.56	16.05	16.55	17.06	18.36	15.16	15.65	16.15	16.66	17.96
	8H	15.70	16.17	16.70	17.17	18.48	15.30	15.76	16.30	16.77	18.08
	12H	15.77	16.19	16.79	17.21	18.53	15.36	15.78	16.37	16.80	18.12
8H	4H	15.25	15.71	16.24	16.71	18.03	14.89	15.35	15.89	16.36	17.67
	6H	15.87	16.25	16.89	17.30	18.61	15.51	15.89	16.53	16.94	18.25
	8H	16.08	16.42	17.11	17.45	18.78	15.72	16.06	16.75	17.09	18.42
	12H	16.21	16.51	17.24	17.53	18.91	15.83	16.13	16.86	17.15	18.53
12H	4H	15.23	15.65	16.25	16.67	17.99	14.88	15.30	15.90	16.32	17.64
	6H	15.90	16.23	16.93	17.27	18.60	15.55	15.89	16.58	16.92	18.25
	8H	16.13	16.43	17.17	17.46	18.83	15.78	16.08	16.81	17.10	18.48