

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331852-830

Luminaire Tested: **S122RDIW-S1005D710U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331852-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D710U830-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5603.6 lumens
Efficiency: N/A
Efficacy: 93.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

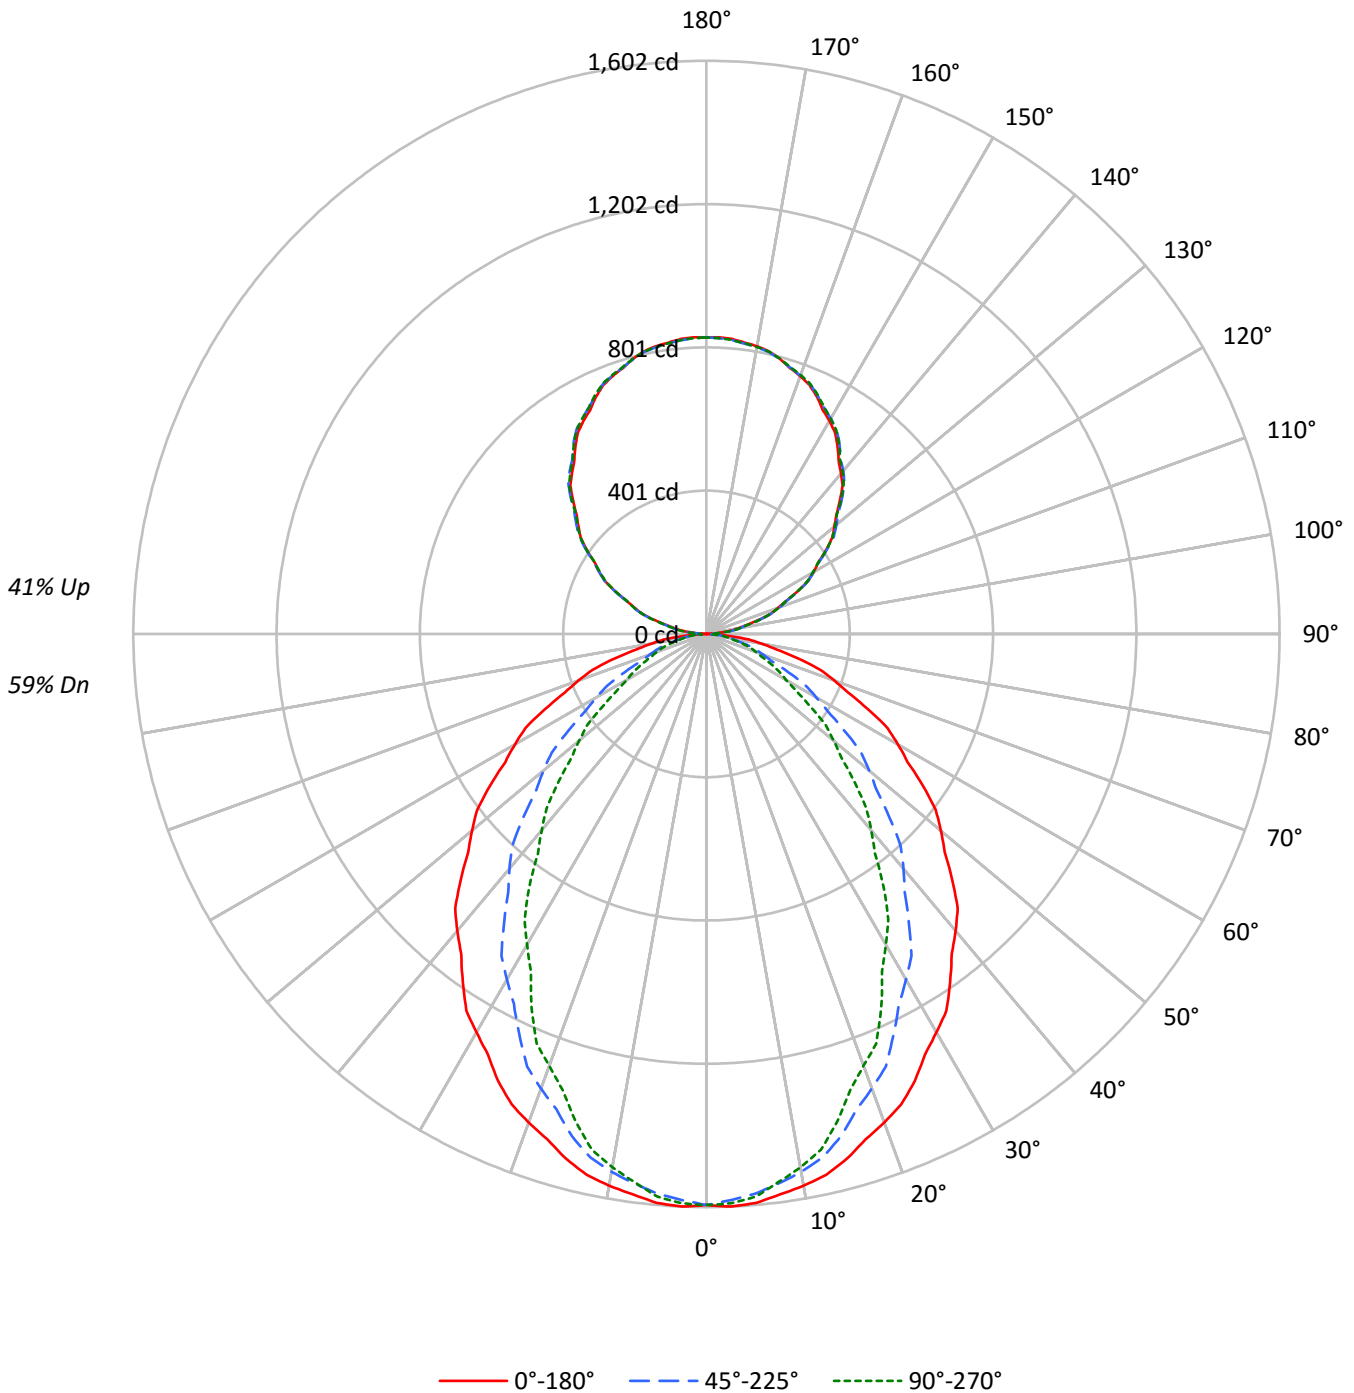



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	96	92	89	93	90	87	84	78	76	74	67	66	64	57	56	55	50
2	92	85	79	74	85	79	74	70	69	65	62	60	57	54	51	49	47	43
3	84	75	68	62	78	70	64	59	62	57	53	53	50	47	46	43	41	37
4	77	67	59	53	72	63	56	50	55	50	45	48	44	41	41	38	36	32
5	71	60	52	46	66	56	49	44	50	44	40	43	39	36	38	34	32	29
6	66	54	46	40	61	51	44	38	45	39	35	39	35	31	34	31	28	25
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25	23
8	57	45	37	32	53	42	35	30	38	32	28	33	29	25	29	25	23	21
9	53	41	33	28	50	39	32	27	35	29	25	31	26	23	27	23	21	19
10	50	38	30	26	46	36	29	25	32	27	23	28	24	21	25	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25770	25770	25770
5°	25869	25449	25590
10°	25671	25032	24819
15°	25377	24289	23590
20°	24967	23230	22063
25°	24549	22026	20587
30°	23968	20789	18690
35°	23402	19446	17026
40°	22835	18054	15099
45°	22165	16493	13358
50°	21481	14913	11645
55°	20777	13216	10001
60°	19963	11428	8302
65°	19037	9605	7561
70°	17934	7912	6954
75°	16581	7211	6488
80°	14635	6453	5904
85°	11504	5076	5076



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.4	2.7
10°-20°	410.2	7.3
20°-30°	576.1	10.3
30°-40°	628.2	11.2
40°-50°	577.6	10.3
50°-60°	453.6	8.1
60°-70°	295.8	5.3
70°-80°	152.5	2.7
80°-90°	42.9	0.8
90°-100°	52.5	0.9
100°-110°	163.1	2.9
110°-120°	278.8	5.0
120°-130°	366.6	6.5
130°-140°	411.5	7.3
140°-150°	403.5	7.2
150°-160°	338.4	6.0
160°-170°	224.5	4.0
170°-180°	78.5	1.4
0°-30°	1135.7	20.3
0°-40°	1763.9	31.5
0°-60°	2795.1	49.9
0°-90°	3286.2	58.6
90°-120°	494.4	8.8
90°-150°	1676.1	29.9
90°-180°	2317.0	41.3
0°-180°	5603.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1596	1596	1596	1596	1596	
5°	1596	1588	1570	1582	1579	151
15°	1518	1500	1453	1426	1411	427
25°	1378	1329	1236	1179	1156	633
35°	1187	1111	987	899	864	743
45°	971	871	722	623	585	749
55°	738	623	470	386	355	659
65°	498	381	251	205	198	494
75°	266	168	116	106	104	281
85°	62	33	27	27	27	73
90°	1	10	24	23	24	4
95°	36	43	45	45	43	42
105°	150	152	154	155	155	159
115°	280	284	283	282	280	277
125°	407	413	411	409	408	364
135°	527	534	536	535	533	407
145°	639	644	648	649	646	399
155°	731	733	735	738	736	336
165°	795	795	795	799	796	224
175°	827	825	824	828	825	79
180°	829	829	829	829	829	



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1
2.5°	1601.9	1600.6	1599.3	1598.1	1596.8	1594.7	1591.9	1589.1	1586.3	1583.5	1586.0
5°	1596.1	1594.5	1592.9	1591.3	1589.7	1586.9	1582.6	1578.5	1574.3	1570.2	1573.0
7.5°	1579.7	1577.7	1575.7	1573.7	1571.7	1568.3	1563.4	1558.5	1553.7	1548.8	1549.6
10°	1565.8	1563.6	1561.3	1559.1	1556.8	1552.5	1546.1	1539.6	1533.2	1526.8	1525.9
12.5°	1548.5	1545.7	1542.9	1540.2	1537.5	1531.9	1523.7	1515.5	1507.3	1499.1	1497.3
15°	1518.2	1514.6	1511.1	1507.5	1504.0	1496.8	1485.9	1475.0	1464.1	1453.1	1447.1
17.5°	1480.8	1475.5	1470.1	1464.7	1459.3	1449.6	1435.6	1421.6	1407.6	1393.6	1386.4
20°	1453.1	1446.7	1440.3	1433.9	1427.5	1416.3	1400.1	1384.1	1368.1	1352.0	1344.0
22.5°	1423.1	1415.9	1408.7	1401.6	1394.3	1381.7	1363.6	1345.5	1327.4	1309.3	1298.9
25°	1378.0	1367.7	1357.4	1347.2	1336.9	1321.3	1300.0	1278.8	1257.6	1236.4	1223.3
27.5°	1323.7	1312.6	1301.4	1290.2	1279.0	1261.5	1237.7	1213.7	1189.9	1166.0	1150.7
30°	1285.6	1273.4	1261.2	1249.0	1236.8	1217.9	1192.1	1166.5	1140.9	1115.1	1098.7
32.5°	1248.6	1234.4	1220.1	1205.9	1191.6	1171.4	1145.2	1119.0	1092.8	1066.6	1047.9
35°	1187.3	1171.0	1154.6	1138.2	1121.9	1099.6	1071.3	1043.1	1014.8	986.6	966.4
37.5°	1126.1	1108.1	1090.1	1072.1	1054.2	1030.2	1000.0	970.0	939.8	909.7	887.5
40°	1083.4	1064.1	1044.8	1025.6	1006.4	981.1	950.0	918.9	887.7	856.6	833.8
42.5°	1039.4	1019.2	998.9	978.5	958.3	932.1	899.9	867.7	835.6	803.4	779.9
45°	970.7	949.1	927.7	906.2	884.7	857.1	823.3	789.7	755.9	722.3	699.5
47.5°	903.6	880.9	858.1	835.3	812.5	783.7	748.9	714.1	679.3	644.5	621.9
50°	855.2	832.4	809.5	786.7	763.9	734.9	699.6	664.3	629.0	593.7	571.6
52.5°	807.8	783.9	760.2	736.3	712.5	683.3	648.8	614.3	579.7	545.2	523.8
55°	738.1	713.1	688.1	663.0	638.0	608.1	573.4	538.8	504.2	469.5	450.2
57.5°	666.8	641.1	615.4	589.7	564.0	534.5	501.2	467.9	434.6	401.2	383.6
60°	618.2	592.6	566.8	541.2	515.5	486.2	453.1	420.0	386.9	353.9	337.5
62.5°	570.9	545.2	519.5	493.8	468.2	439.5	408.0	376.5	345.0	313.5	297.8
65°	498.3	472.3	446.4	420.4	394.4	366.9	338.0	309.2	280.2	251.4	240.4
67.5°	428.4	402.7	376.8	351.0	325.2	299.3	273.3	247.3	221.3	195.3	190.3
70°	379.9	354.9	329.8	304.8	279.7	256.2	234.0	211.9	189.7	167.6	164.4
72.5°	333.7	309.6	285.7	261.6	237.6	216.7	199.0	181.2	163.3	145.6	142.9
75°	265.8	243.3	220.8	198.4	175.9	159.2	148.3	137.4	126.5	115.6	113.3
77.5°	199.1	179.4	159.7	140.0	120.2	107.7	102.5	97.2	91.9	86.7	85.4
80°	157.4	141.1	124.7	108.3	92.0	82.2	79.0	75.8	72.6	69.4	68.1
82.5°	119.3	106.5	93.8	81.0	68.2	60.7	58.5	56.4	54.2	52.0	51.3
85°	62.1	55.3	48.6	41.8	35.2	31.3	30.3	29.4	28.4	27.4	27.4
87.5°	18.7	17.0	15.3	13.6	11.9	11.4	12.1	12.8	13.5	14.1	13.9
90°	0.7	2.5	4.4	6.3	8.2	10.8	14.2	17.6	21.0	24.5	24.1
92.5°	12.4	13.9	15.2	16.6	17.9	19.0	19.8	20.6	21.4	22.2	22.3
95°	36.4	37.9	39.5	41.0	42.6	43.5	43.8	44.1	44.5	44.8	44.8
97.5°	66.4	67.8	69.2	70.5	71.9	72.9	73.5	74.1	74.6	75.2	75.2
100°	88.8	90.1	91.3	92.6	93.8	94.6	95.1	95.6	96.0	96.5	96.5
102.5°	112.4	113.3	114.3	115.3	116.3	117.1	117.7	118.3	118.9	119.4	119.6
105°	150.3	150.8	151.3	151.7	152.2	152.6	153.0	153.3	153.5	153.9	154.2
107.5°	188.7	189.4	190.1	190.8	191.4	191.8	191.8	191.8	191.8	191.8	191.9
110°	213.3	214.2	215.2	216.1	217.1	217.5	217.5	217.5	217.5	217.5	217.5



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	240.2	241.1	242.0	243.0	243.9	244.3	244.2	244.0	243.9	243.8	243.5
115°	279.7	280.7	281.6	282.6	283.5	283.8	283.5	283.1	282.9	282.6	282.4
117.5°	319.2	320.5	321.7	322.9	324.1	324.3	323.5	322.6	321.8	320.9	320.6
120°	345.5	346.8	348.0	349.2	350.4	350.4	349.2	348.0	346.8	345.5	345.5
122.5°	369.6	371.1	372.6	374.0	375.5	375.9	374.9	374.1	373.2	372.4	372.0
125°	407.1	408.5	409.8	411.2	412.6	413.1	412.6	412.2	411.7	411.2	410.8
127.5°	443.6	445.4	447.1	448.8	450.6	451.3	450.7	450.2	449.6	449.0	448.5
130°	466.5	468.5	470.5	472.6	474.6	475.4	475.1	474.9	474.5	474.2	473.9
132.5°	492.3	493.9	495.6	497.2	498.8	499.7	499.7	499.8	499.9	499.9	499.3
135°	526.7	528.4	530.1	531.8	533.5	534.5	534.8	535.2	535.5	535.7	535.6
137.5°	562.9	564.3	565.7	567.1	568.4	569.4	569.8	570.2	570.6	571.0	570.9
140°	584.8	586.1	587.5	588.9	590.3	591.4	592.2	593.0	593.7	594.5	594.5
142.5°	607.1	608.5	609.9	611.3	612.7	613.7	614.2	614.7	615.2	615.8	615.9
145°	639.2	640.4	641.4	642.5	643.7	644.6	645.5	646.5	647.4	648.4	648.5
147.5°	668.0	669.2	670.5	671.8	673.2	674.1	674.8	675.3	676.0	676.7	676.9
150°	687.5	688.4	689.4	690.3	691.3	692.0	692.7	693.2	693.9	694.6	695.0
152.5°	704.8	705.8	706.7	707.7	708.6	709.5	710.2	711.0	711.7	712.5	713.0
155°	730.8	731.3	731.8	732.3	732.7	733.2	733.7	734.1	734.6	735.1	735.8
157.5°	753.1	753.5	753.8	754.0	754.4	754.7	755.0	755.3	755.5	755.8	756.9
160°	766.6	766.9	767.1	767.5	767.8	768.1	768.2	768.4	768.5	768.6	769.6
162.5°	778.8	778.9	779.0	779.0	779.1	779.2	779.4	779.6	779.7	779.9	780.9
165°	795.2	795.0	794.9	794.8	794.7	794.6	794.6	794.6	794.6	794.6	795.6
167.5°	809.0	808.5	808.0	807.6	807.1	806.8	806.8	806.7	806.7	806.7	807.8
170°	816.2	815.8	815.3	814.8	814.4	814.1	813.9	813.7	813.6	813.4	814.5
172.5°	821.2	820.8	820.3	819.8	819.4	819.1	818.9	818.8	818.6	818.4	819.5
175°	827.4	827.0	826.5	826.0	825.6	825.2	824.8	824.5	824.3	823.9	825.0
177.5°	829.9	829.5	829.2	828.8	828.4	828.1	827.8	827.6	827.4	827.1	827.8
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1
2.5°	1588.6	1591.1	1593.7	1594.7	1594.2	1593.7	1593.2	1592.7
5°	1575.9	1578.9	1581.7	1582.6	1581.7	1580.7	1579.8	1578.9
7.5°	1550.4	1551.2	1552.1	1551.7	1550.0	1548.3	1546.7	1545.0
10°	1524.8	1523.9	1523.0	1521.5	1519.6	1517.7	1515.7	1513.8
12.5°	1495.6	1493.8	1492.1	1489.7	1486.5	1483.3	1480.1	1476.9
15°	1441.0	1434.8	1428.7	1424.1	1420.9	1417.7	1414.5	1411.3
17.5°	1379.1	1371.9	1364.6	1358.2	1352.7	1347.2	1341.6	1336.1
20°	1336.0	1327.9	1319.9	1312.4	1305.3	1298.3	1291.2	1284.1
22.5°	1288.6	1278.3	1267.9	1260.1	1254.9	1249.6	1244.3	1239.1
25°	1210.1	1197.0	1183.8	1174.9	1170.0	1165.2	1160.4	1155.6
27.5°	1135.3	1119.9	1104.6	1093.1	1085.4	1077.8	1070.2	1062.5
30°	1082.4	1066.0	1049.6	1037.2	1028.5	1019.8	1011.2	1002.5
32.5°	1029.3	1010.6	991.8	978.5	970.3	962.1	953.9	945.8
35°	946.1	926.0	905.7	892.0	885.0	877.9	870.8	863.8
37.5°	865.2	842.9	820.6	805.4	797.4	789.3	781.2	773.1
40°	811.0	788.2	765.4	749.9	741.5	733.1	724.8	716.4
42.5°	756.3	732.7	709.2	693.3	685.2	677.1	669.1	661.0
45°	676.7	653.8	631.0	615.9	608.1	600.4	592.7	585.0
47.5°	599.2	576.6	553.8	539.0	532.1	525.1	518.0	511.0
50°	549.4	527.3	505.1	490.6	483.9	477.1	470.4	463.6
52.5°	502.4	481.0	459.7	445.8	439.6	433.4	427.2	420.9
55°	430.9	411.7	392.4	379.8	373.6	367.5	361.5	355.3
57.5°	366.0	348.3	330.6	319.2	314.1	309.0	303.9	298.7
60°	321.1	304.8	288.4	277.7	272.5	267.4	262.2	257.1
62.5°	282.3	266.6	251.1	241.7	238.7	235.5	232.4	229.4
65°	229.5	218.6	207.6	201.7	200.8	199.8	198.9	197.9
67.5°	185.3	180.3	175.2	172.2	171.3	170.2	169.2	168.1
70°	161.2	158.0	154.8	152.5	151.2	149.9	148.6	147.3
72.5°	140.3	137.5	134.8	133.1	132.3	131.6	130.7	130.0
75°	111.0	108.9	106.6	105.3	105.0	104.6	104.3	104.0
77.5°	84.1	82.8	81.5	80.6	80.1	79.6	79.1	78.6
80°	66.7	65.5	64.2	63.5	63.5	63.5	63.5	63.5
82.5°	50.4	49.7	48.9	48.5	48.5	48.5	48.5	48.5
85°	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4
87.5°	13.5	13.2	12.8	12.7	12.7	12.8	12.8	12.8
90°	23.8	23.6	23.3	23.2	23.3	23.5	23.7	23.8
92.5°	22.3	22.4	22.5	22.5	22.5	22.6	22.6	22.6
95°	44.8	44.8	44.8	44.6	44.3	44.0	43.6	43.4
97.5°	75.2	75.2	75.2	75.2	75.2	75.2	75.1	75.1
100°	96.5	96.5	96.5	96.4	96.3	96.1	96.0	95.9
102.5°	119.7	119.8	120.0	120.0	119.8	119.6	119.5	119.3
105°	154.5	154.8	155.1	155.2	155.2	155.2	155.2	155.2
107.5°	192.0	192.2	192.3	192.0	191.2	190.6	189.8	189.2
110°	217.5	217.5	217.5	217.3	216.8	216.3	215.8	215.5



TEST NUMBER: P331852-830

CATALOG NUMBER: S122RDIW-S1005D710U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	243.1	242.7	242.3	242.0	241.7	241.3	240.9	240.6
115°	282.3	282.1	281.9	281.6	281.2	280.7	280.2	279.7
117.5°	320.2	319.8	319.4	319.0	318.5	318.0	317.5	317.1
120°	345.5	345.5	345.5	345.3	344.8	344.3	343.8	343.4
122.5°	371.6	371.3	370.9	370.5	370.1	369.9	369.5	369.2
125°	410.3	409.8	409.3	409.1	409.0	408.8	408.6	408.5
127.5°	447.9	447.3	446.8	446.3	445.7	445.3	444.8	444.3
130°	473.6	473.3	473.0	472.5	471.8	471.3	470.6	470.0
132.5°	498.6	497.9	497.2	496.6	496.2	495.6	495.1	494.6
135°	535.5	535.3	535.2	534.8	534.3	533.9	533.4	532.9
137.5°	570.7	570.6	570.5	570.1	569.5	568.9	568.3	567.6
140°	594.5	594.5	594.5	594.2	593.6	593.0	592.3	591.7
142.5°	616.0	616.1	616.2	616.0	615.4	614.7	614.2	613.5
145°	648.7	648.8	648.9	648.8	648.1	647.5	646.9	646.3
147.5°	677.3	677.6	678.0	677.9	677.3	676.7	676.1	675.5
150°	695.4	695.9	696.4	696.4	695.9	695.4	695.0	694.6
152.5°	713.6	714.2	714.8	714.8	714.2	713.6	713.0	712.5
155°	736.6	737.4	738.2	738.4	737.9	737.4	737.0	736.5
157.5°	757.9	758.9	760.0	760.2	759.4	758.7	757.9	757.1
160°	770.5	771.5	772.4	772.5	771.9	771.3	770.7	770.1
162.5°	781.9	783.1	784.1	784.2	783.4	782.8	782.0	781.3
165°	796.7	797.8	798.9	799.1	798.2	797.5	796.7	796.0
167.5°	808.9	809.9	811.1	811.2	810.4	809.5	808.8	807.9
170°	815.6	816.7	817.7	817.8	816.9	816.0	815.0	814.1
172.5°	820.7	821.7	822.8	822.8	822.0	821.0	820.1	819.2
175°	826.0	827.2	828.3	828.3	827.4	826.5	825.6	824.6
177.5°	828.6	829.3	830.1	830.1	829.3	828.6	827.8	827.1
180°	828.8	828.8	828.8	828.8	828.8	828.8	828.8	828.8

(END OF REPORT)