

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332758-927

Luminaire Tested: **S124DIW-S575D1050U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332758-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1050U927-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4934.9 lumens
Efficiency: N/A
Efficacy: 109.2 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

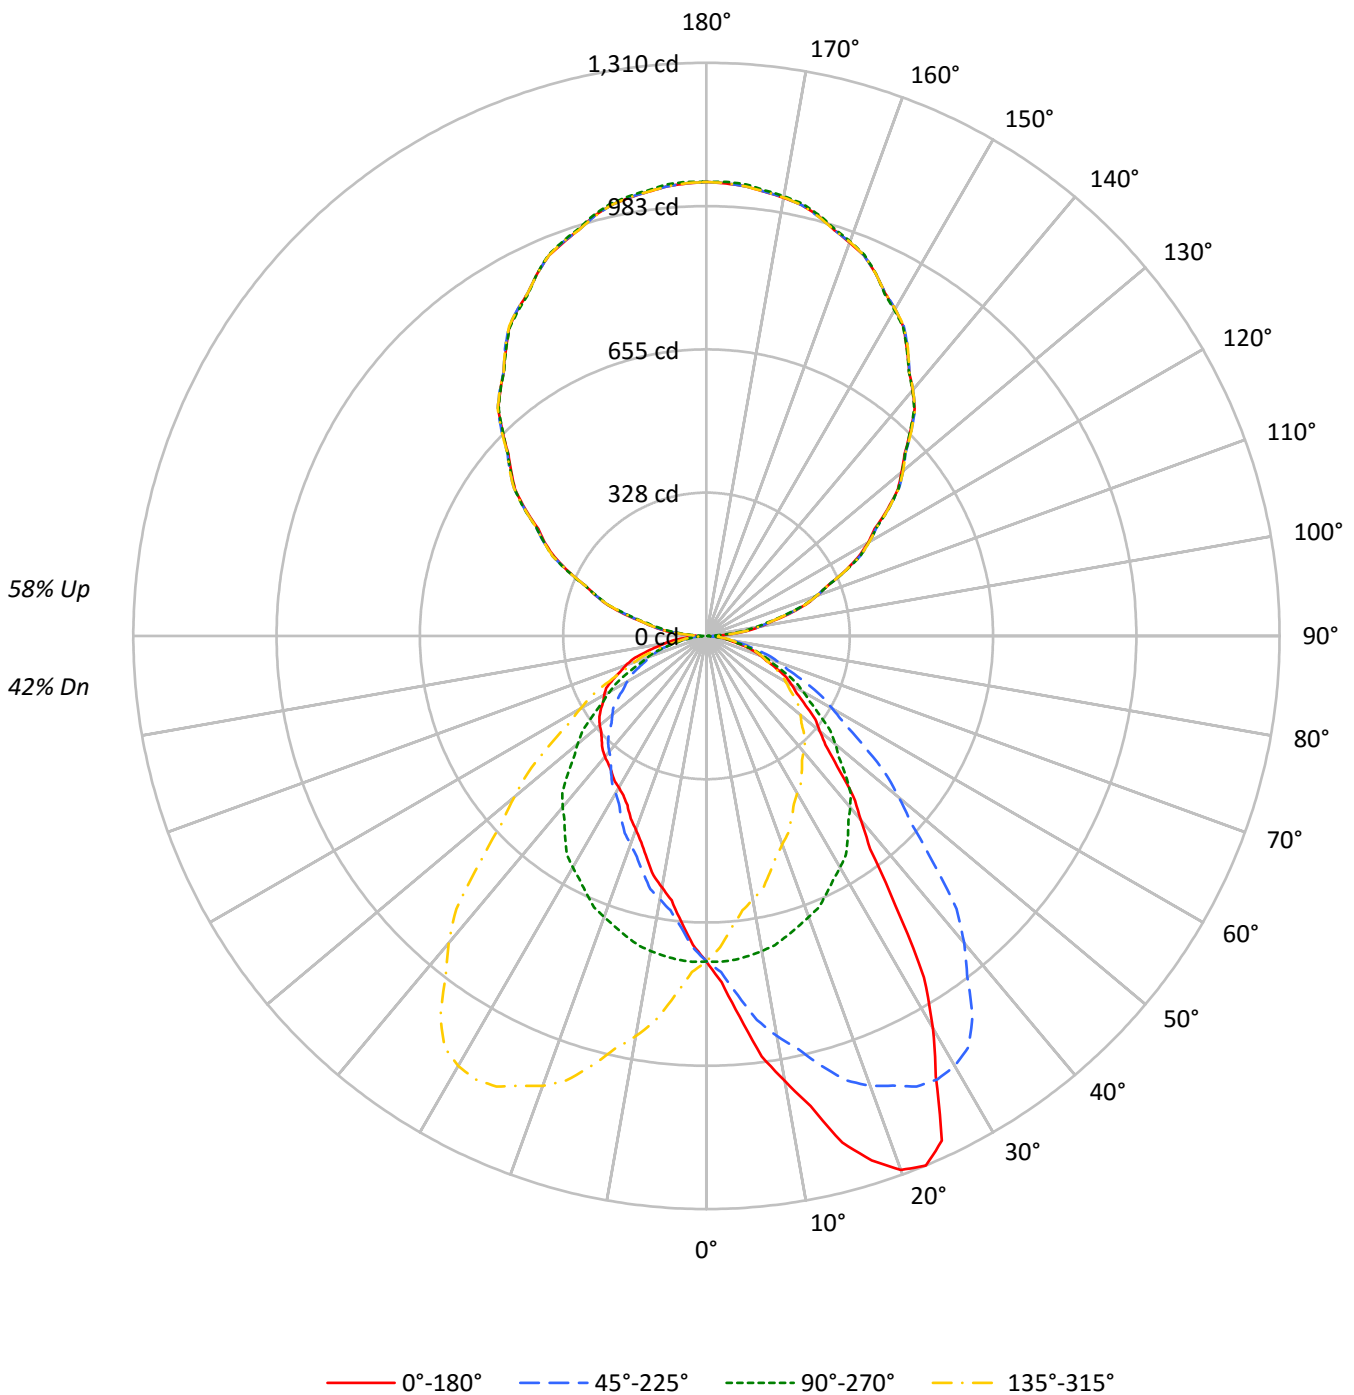



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	42					42			
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	35					35			
2	88	80	74	69	80	74	69	64	61	57	54	49	46	44	38	36	35	30					30			
3	80	71	64	58	73	65	59	54	54	49	46	43	40	38	34	32	30	26					26			
4	73	63	55	49	67	58	51	46	48	43	39	39	35	32	30	28	26	22					22			
5	67	56	48	42	61	51	44	39	43	38	34	35	31	28	27	25	23	19					19			
6	62	50	42	37	56	46	39	34	39	33	29	32	28	25	25	22	20	17					17			
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15					15			
8	53	41	34	28	48	38	31	27	32	27	23	26	22	19	21	18	16	14					14			
9	49	37	30	25	45	35	28	24	29	24	21	24	20	18	19	17	14	12					12			
10	46	34	27	23	42	32	25	21	27	22	18	22	19	16	18	15	13	11					11			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	6006	6006	6006	6006
5°	7074	6022	5315	6022
10°	8470	5996	4786	5996
15°	10021	5935	4395	5935
20°	11159	5874	4046	5874
25°	11339	5782	3805	5782
30°	9648	5695	3730	5695
35°	7418	5552	3730	5552
40°	5782	5385	3800	5385
45°	4820	5134	3863	5134
50°	4243	4828	3995	4828
55°	3887	4460	4155	4460
60°	3643	4130	4350	4130
65°	3391	3761	4510	3761
70°	3099	3397	4612	3397
75°	2770	2991	4557	2991
80°	2320	2450	4412	2450
85°	1714	1769	4224	1769



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	1.5
10°-20°	223.4	4.5
20°-30°	354.3	7.2
30°-40°	394.3	8.0
40°-50°	358.9	7.3
50°-60°	293.3	5.9
60°-70°	209.4	4.2
70°-80°	115.3	2.3
80°-90°	34.6	0.7
90°-100°	68.4	1.4
100°-110°	202.7	4.1
110°-120°	344.1	7.0
120°-130°	453.7	9.2
130°-140°	509.6	10.3
140°-150°	500.8	10.1
150°-160°	421.2	8.5
160°-170°	280.2	5.7
170°-180°	98.1	2.0
0°-30°	650.2	13.2
0°-40°	1044.5	21.2
0°-60°	1696.7	34.4
0°-90°	2056.0	41.7
90°-120°	615.3	12.5
90°-150°	2079.4	42.1
90°-180°	2879.0	58.3
0°-180°	4934.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	744	744	744	744	744	
5°	873	743	656	743	873	89
15°	1199	710	526	710	1199	339
25°	1273	649	427	649	1273	561
35°	753	563	378	563	753	478
45°	422	450	338	450	422	333
55°	276	317	295	317	276	249
65°	178	197	236	197	178	176
75°	89	96	146	96	89	94
85°	18	19	46	19	18	23
90°	24	2	24	2	24	13
95°	63	48	63	48	63	66
105°	196	187	196	187	196	206
115°	347	350	347	350	347	343
125°	506	510	506	510	506	451
135°	658	657	658	657	658	508
145°	799	798	799	798	799	500
155°	914	915	914	915	914	421
165°	994	996	994	996	994	280
175°	1031	1036	1031	1036	1031	98
180°	1038	1038	1038	1038	1038	



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	791.9	791.6	789.2	788.7	787.0	784.7	784.3	780.3	772.4	768.7	767.7
5°	872.9	879.1	871.0	869.5	868.5	858.4	853.2	847.0	832.8	824.5	818.0
7.5°	969.6	970.3	966.8	963.9	956.1	947.2	933.9	919.7	902.9	885.3	872.0
10°	1033.2	1035.6	1031.7	1031.0	1015.3	1005.4	985.7	969.1	949.9	928.7	909.3
12.5°	1100.3	1096.8	1094.7	1081.6	1078.6	1060.7	1037.8	1020.6	991.1	966.6	940.8
15°	1199.0	1192.2	1187.9	1169.7	1160.8	1135.8	1111.4	1092.7	1054.2	1017.5	989.7
17.5°	1257.0	1263.7	1253.7	1246.3	1223.1	1205.6	1180.7	1141.3	1111.1	1065.6	1030.5
20°	1298.9	1299.5	1294.0	1286.2	1268.0	1245.9	1218.7	1175.6	1139.5	1094.2	1046.1
22.5°	1310.2	1310.3	1308.0	1300.8	1287.0	1269.0	1241.7	1205.6	1162.0	1112.7	1064.6
25°	1273.0	1271.8	1274.5	1282.5	1277.3	1271.8	1256.0	1229.2	1188.5	1136.4	1084.7
27.5°	1134.6	1143.1	1158.8	1178.5	1197.5	1212.0	1216.1	1210.6	1185.3	1142.5	1088.3
30°	1035.0	1045.5	1057.2	1077.0	1115.2	1137.0	1161.1	1179.2	1169.1	1134.9	1084.3
32.5°	925.5	928.1	945.5	968.0	1003.0	1045.0	1083.2	1120.1	1132.3	1114.4	1072.2
35°	752.7	757.0	775.8	798.0	840.8	892.3	949.7	1000.8	1043.1	1060.0	1038.4
37.5°	614.3	626.6	639.8	663.7	701.5	747.8	807.4	873.5	936.5	978.7	985.8
40°	548.7	556.3	565.9	584.1	616.2	661.8	712.9	788.8	855.6	916.1	935.8
42.5°	496.9	501.4	507.2	523.6	548.1	593.4	640.2	706.9	774.0	846.3	879.3
45°	422.2	426.9	436.7	446.3	464.8	496.2	539.7	594.5	662.0	731.7	792.7
47.5°	368.4	371.4	377.2	387.5	403.1	423.9	459.2	505.0	567.6	635.3	700.3
50°	337.8	340.2	344.9	354.2	366.1	384.7	413.6	456.5	505.5	573.6	637.4
52.5°	313.6	314.7	318.1	324.3	333.9	349.4	373.2	408.6	454.2	514.9	578.5
55°	276.2	277.4	280.5	285.1	293.4	303.3	321.5	348.0	387.8	440.5	495.6
57.5°	245.3	246.2	248.8	250.6	257.5	265.5	279.4	298.3	328.5	373.2	422.5
60°	225.6	225.0	228.1	229.7	234.2	241.1	251.8	270.0	296.2	332.2	377.6
62.5°	206.4	205.5	208.1	210.2	212.8	218.6	227.4	241.6	262.9	295.6	334.7
65°	177.5	176.3	177.8	180.3	182.8	185.8	192.3	204.9	221.9	245.3	275.2
67.5°	148.5	149.9	150.1	151.3	152.7	156.9	161.4	170.3	182.3	201.1	226.3
70°	131.3	131.6	132.8	132.8	133.8	137.4	141.2	146.4	158.1	175.4	196.1
72.5°	114.1	115.3	114.9	115.8	116.5	119.0	121.7	126.7	136.7	149.5	166.9
75°	88.8	89.7	89.7	90.0	90.9	91.8	94.0	97.7	104.8	114.3	126.4
77.5°	64.7	64.9	65.3	66.4	66.4	67.9	69.5	72.4	76.0	82.5	89.8
80°	49.9	50.5	50.2	50.9	50.9	52.1	52.7	56.4	57.9	62.3	68.1
82.5°	36.6	37.2	37.2	38.0	38.5	38.7	39.6	41.1	42.6	46.5	48.9
85°	18.5	19.1	18.5	19.1	20.0	20.4	21.2	21.5	22.8	23.8	25.9
87.5°	10.2	10.9	10.9	11.0	11.4	11.6	11.6	11.1	11.9	11.9	12.6
90°	24.1	23.7	23.4	23.0	22.7	21.9	20.8	19.8	18.7	17.7	16.2
92.5°	35.6	35.4	35.2	35.0	34.8	34.4	33.7	33.0	32.4	31.8	30.8
95°	63.4	63.4	63.4	63.4	63.4	63.1	62.6	62.0	61.6	61.0	59.7
97.5°	99.3	99.3	99.3	99.3	99.3	99.0	98.4	97.8	97.1	96.5	95.0
100°	124.4	124.4	124.4	124.4	124.4	124.2	123.8	123.5	123.1	122.8	121.2
102.5°	152.7	152.5	152.3	152.2	152.1	151.8	151.2	150.8	150.3	149.7	148.3
105°	195.8	195.3	194.7	194.2	193.7	193.1	192.6	192.1	191.5	191.0	190.3
107.5°	237.9	237.9	238.0	238.0	238.0	237.8	237.3	236.8	236.3	235.8	235.7
110°	268.1	267.5	267.0	266.4	265.9	265.8	266.2	266.5	266.9	267.2	267.4



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	298.9	298.7	298.7	298.6	298.4	298.4	298.5	298.6	298.7	298.7	299.0
115°	346.7	346.9	347.1	347.2	347.4	347.6	347.8	347.9	348.1	348.3	348.6
117.5°	392.3	392.6	393.0	393.3	393.7	394.2	394.7	395.4	396.0	396.6	396.9
120°	426.9	426.6	426.2	425.9	425.5	425.8	426.7	427.5	428.5	429.4	429.9
122.5°	455.8	456.5	457.1	457.7	458.4	459.0	459.6	460.3	460.8	461.4	461.7
125°	505.6	506.0	506.3	506.7	507.0	507.4	507.7	508.1	508.4	508.8	509.0
127.5°	551.7	551.9	552.2	552.5	552.8	553.1	553.5	553.8	554.2	554.5	554.8
130°	581.9	582.6	583.3	584.0	584.7	585.2	585.6	585.9	586.3	586.6	586.6
132.5°	613.9	614.2	614.5	614.8	615.1	615.4	615.8	616.1	616.5	616.8	617.0
135°	658.1	658.6	659.1	659.7	660.2	660.7	661.0	661.4	661.7	662.1	662.1
137.5°	704.4	704.3	704.3	704.1	704.0	704.2	704.6	705.1	705.6	706.1	705.8
140°	732.7	732.8	733.1	733.2	733.4	733.6	733.8	734.0	734.1	734.3	734.3
142.5°	761.0	761.0	761.0	761.0	761.0	761.1	761.1	761.2	761.2	761.3	761.4
145°	799.3	799.9	800.3	800.9	801.5	801.8	802.0	802.2	802.3	802.5	802.3
147.5°	838.1	838.3	838.5	838.7	838.8	839.0	839.2	839.3	839.5	839.6	839.7
150°	861.9	862.1	862.3	862.4	862.6	862.7	862.7	862.7	862.7	862.7	862.7
152.5°	883.8	884.2	884.6	885.1	885.6	885.6	885.2	884.7	884.3	883.9	883.8
155°	914.1	914.8	915.5	916.2	917.0	917.0	916.2	915.5	914.8	914.1	914.3
157.5°	941.2	941.8	942.4	943.0	943.6	943.6	943.1	942.6	942.1	941.5	941.5
160°	956.6	957.5	958.4	959.3	960.1	960.4	959.8	959.3	958.7	958.2	958.4
162.5°	972.6	973.5	974.5	975.3	976.2	976.2	975.2	974.2	973.3	972.3	972.5
165°	993.5	994.2	994.9	995.6	996.3	996.2	995.1	994.0	993.0	991.9	992.3
167.5°	1008.4	1009.6	1010.7	1011.8	1012.9	1012.9	1011.8	1010.7	1009.6	1008.6	1008.5
170°	1016.8	1018.0	1019.3	1020.6	1021.8	1021.8	1020.8	1019.7	1018.7	1017.6	1017.4
172.5°	1023.8	1025.1	1026.4	1027.6	1028.8	1028.9	1027.6	1026.4	1025.2	1024.0	1024.0
175°	1031.3	1032.5	1033.7	1035.0	1036.3	1036.3	1035.0	1033.7	1032.5	1031.3	1031.4
177.5°	1035.1	1036.3	1037.4	1038.5	1039.7	1039.7	1038.7	1037.8	1036.7	1035.7	1035.7
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	767.9	764.5	762.1	760.1	754.6	751.5	749.0	745.5	741.6	737.4	732.2
5°	811.6	801.1	793.4	781.6	770.6	761.3	751.8	743.1	732.6	721.3	712.9
7.5°	857.4	841.8	821.8	804.5	785.0	768.0	752.9	737.4	721.2	705.5	691.2
10°	886.5	866.4	844.2	818.0	793.4	771.5	751.1	731.4	712.3	693.2	676.8
12.5°	917.7	892.8	860.0	829.3	801.8	772.5	747.9	723.7	700.7	680.6	661.6
15°	959.8	923.8	885.8	844.9	808.5	774.3	740.7	710.1	684.3	657.7	639.3
17.5°	985.6	941.0	897.7	854.8	810.8	767.6	731.4	696.2	663.8	637.5	614.2
20°	1002.7	958.3	904.4	861.5	809.1	764.7	722.8	683.7	649.7	621.7	597.6
22.5°	1017.5	966.1	912.2	855.8	803.7	756.5	710.7	671.3	636.7	607.1	584.1
25°	1025.5	966.6	908.0	851.9	792.7	737.0	695.4	649.1	612.1	581.0	556.3
27.5°	1026.4	963.4	897.1	834.8	773.7	721.8	669.2	627.9	589.5	556.6	532.9
30°	1023.6	958.0	886.8	819.3	758.0	701.5	655.9	610.9	571.7	539.1	514.4
32.5°	1014.9	946.6	873.5	802.0	738.5	683.3	636.2	593.4	555.2	523.1	497.2
35°	990.0	922.5	844.5	770.2	705.2	649.4	606.9	563.4	525.2	494.7	469.8
37.5°	951.0	889.9	810.7	733.8	669.9	613.9	571.7	532.5	498.0	467.0	441.4
40°	917.0	863.3	783.8	708.9	639.8	586.5	547.1	511.0	476.8	447.5	423.2
42.5°	877.7	831.0	757.6	678.3	611.7	558.2	519.8	487.4	455.1	428.1	403.7
45°	807.9	777.1	708.0	634.6	565.3	514.8	478.1	449.7	422.6	396.1	375.7
47.5°	727.5	712.2	654.0	584.4	518.6	468.7	437.0	410.7	387.0	364.5	346.6
50°	673.4	666.1	615.8	548.7	485.8	438.9	406.9	384.4	364.0	344.3	327.3
52.5°	620.2	620.0	574.6	513.1	455.0	409.8	378.0	357.0	339.4	323.3	308.1
55°	538.8	547.4	512.0	457.1	405.0	364.3	335.6	316.9	304.5	291.3	279.9
57.5°	464.0	478.3	449.1	400.8	357.3	319.8	294.9	280.7	267.6	259.6	251.3
60°	415.2	428.7	405.9	365.3	324.2	292.2	268.5	255.8	244.4	238.8	233.0
62.5°	371.8	383.9	366.9	329.2	293.7	262.8	242.8	230.7	223.0	216.9	213.0
65°	309.7	320.0	305.5	278.1	247.5	222.8	206.5	196.9	189.6	187.1	182.8
67.5°	250.4	259.7	251.8	228.5	204.1	185.4	172.6	163.4	159.1	156.9	153.8
70°	215.2	224.4	216.0	195.7	176.9	161.2	149.2	143.9	139.3	138.4	134.1
72.5°	185.3	191.6	183.2	167.4	151.3	138.0	128.7	123.3	120.8	119.1	116.8
75°	139.0	144.6	139.0	126.7	115.3	106.0	98.0	95.9	93.1	92.1	90.6
77.5°	98.4	103.2	98.9	91.3	82.7	75.6	71.3	68.5	67.9	66.3	67.0
80°	75.2	78.3	74.3	69.1	62.3	57.4	54.3	52.7	50.9	50.2	51.5
82.5°	54.0	55.4	53.3	49.8	44.8	41.5	39.5	37.6	37.3	37.4	37.4
85°	28.0	27.7	27.4	24.3	22.8	20.7	19.4	19.1	18.8	19.4	20.0
87.5°	12.4	12.3	11.7	10.5	9.3	8.2	7.5	6.9	7.5	8.2	8.8
90°	14.8	13.4	12.0	10.2	8.3	6.3	4.4	2.4	4.4	6.3	8.3
92.5°	29.8	28.8	27.8	26.1	23.9	21.7	19.4	17.2	19.4	21.7	23.9
95°	58.5	57.3	56.0	54.6	53.0	51.3	49.7	48.2	49.7	51.3	53.0
97.5°	93.6	92.1	90.6	89.3	87.9	86.7	85.4	84.1	85.4	86.7	87.9
100°	119.5	118.0	116.4	115.2	114.5	113.8	113.0	112.3	113.0	113.8	114.5
102.5°	146.8	145.4	143.9	143.0	142.8	142.4	142.2	141.9	142.2	142.4	142.8
105°	189.6	188.9	188.1	187.7	187.5	187.4	187.2	187.0	187.2	187.4	187.5
107.5°	235.6	235.4	235.4	235.2	235.0	234.7	234.6	234.3	234.6	234.7	235.0
110°	267.6	267.8	267.9	267.8	267.5	267.1	266.8	266.4	266.8	267.1	267.5



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	299.4	299.7	300.0	300.1	300.0	300.0	299.9	299.8	299.9	300.0	300.0
115°	349.0	349.4	349.7	349.9	349.9	349.9	349.9	349.9	349.9	349.9	349.9
117.5°	397.1	397.4	397.6	397.7	397.5	397.4	397.2	397.1	397.2	397.4	397.5
120°	430.4	430.9	431.5	431.4	430.7	430.0	429.3	428.6	429.3	430.0	430.7
122.5°	461.9	462.2	462.5	462.4	462.2	461.8	461.6	461.3	461.6	461.8	462.2
125°	509.1	509.3	509.5	509.6	509.6	509.6	509.6	509.6	509.6	509.6	509.6
127.5°	555.1	555.4	555.7	555.6	555.0	554.4	554.0	553.4	554.0	554.4	555.0
130°	586.6	586.6	586.6	586.4	585.8	585.3	584.8	584.2	584.8	585.3	585.8
132.5°	617.1	617.3	617.3	617.3	616.9	616.5	616.1	615.7	616.1	616.5	616.9
135°	662.1	662.1	662.1	661.6	660.4	659.4	658.3	657.3	658.3	659.4	660.4
137.5°	705.5	705.2	704.9	704.5	704.0	703.5	703.0	702.5	703.0	703.5	704.0
140°	734.3	734.3	734.3	734.1	733.8	733.4	733.1	732.7	733.1	733.4	733.8
142.5°	761.5	761.7	761.8	761.8	761.4	761.0	760.7	760.3	760.7	761.0	761.4
145°	802.2	802.0	801.8	801.4	800.7	799.9	799.2	798.5	799.2	799.9	800.7
147.5°	839.9	840.0	840.2	839.8	838.9	838.1	837.3	836.4	837.3	838.1	838.9
150°	862.7	862.7	862.7	862.4	861.7	860.9	860.2	859.5	860.2	860.9	861.7
152.5°	883.6	883.4	883.3	883.0	882.6	882.2	881.8	881.3	881.8	882.2	882.6
155°	914.4	914.6	914.8	914.9	914.9	914.9	914.9	914.9	914.9	914.9	914.9
157.5°	941.6	941.6	941.7	941.8	942.1	942.5	942.8	943.1	942.8	942.5	942.1
160°	958.5	958.7	958.9	959.1	959.3	959.4	959.6	959.8	959.6	959.4	959.3
162.5°	972.7	972.9	973.0	973.4	973.8	974.3	974.8	975.2	974.8	974.3	973.8
165°	992.6	993.0	993.3	993.8	994.3	994.8	995.4	995.9	995.4	994.8	994.3
167.5°	1008.5	1008.5	1008.4	1008.8	1009.6	1010.3	1011.1	1011.8	1011.1	1010.3	1009.6
170°	1017.2	1017.1	1016.8	1017.2	1018.1	1019.0	1019.9	1020.8	1019.9	1019.0	1018.1
172.5°	1024.0	1023.9	1023.9	1024.2	1025.0	1025.7	1026.4	1027.2	1026.4	1025.7	1025.0
175°	1031.6	1031.7	1032.0	1032.5	1033.4	1034.3	1035.1	1036.0	1035.1	1034.3	1033.4
177.5°	1035.7	1035.7	1035.7	1036.1	1036.8	1037.5	1038.2	1038.9	1038.2	1037.5	1036.8
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	729.8	727.5	724.3	719.9	716.2	712.3	711.2	709.8	712.7	710.3	709.6
5°	705.8	699.3	691.0	681.5	676.0	667.9	666.4	663.3	660.2	659.9	656.8
7.5°	680.5	671.0	660.1	650.4	641.4	632.6	626.9	625.7	621.1	618.5	615.4
10°	664.2	652.5	639.8	630.7	620.1	610.9	604.4	600.7	597.6	594.2	591.2
12.5°	645.0	632.6	622.1	612.1	599.7	592.6	582.0	575.6	575.0	575.0	567.0
15°	622.6	610.3	594.2	580.1	573.3	559.8	553.9	546.4	541.9	537.3	533.5
17.5°	597.1	581.7	569.2	552.9	540.0	529.2	521.4	517.0	510.1	503.5	498.8
20°	581.0	564.7	551.4	534.2	520.0	506.8	500.3	494.1	488.9	483.3	478.1
22.5°	564.7	547.6	531.5	514.7	501.5	487.5	481.3	472.9	467.9	464.8	459.5
25°	539.1	520.6	502.1	486.1	472.5	460.2	451.9	445.4	439.8	437.4	434.0
27.5°	511.2	492.8	475.0	456.8	441.4	432.5	425.8	420.9	417.7	414.5	412.9
30°	493.5	474.4	455.3	438.3	424.1	415.2	409.0	405.6	403.1	401.6	400.1
32.5°	475.5	456.6	436.5	421.0	408.4	400.4	395.7	392.3	391.1	390.5	390.0
35°	446.6	427.5	409.0	395.1	383.1	380.0	376.0	374.1	373.6	375.7	376.7
37.5°	418.7	400.9	383.9	370.5	362.6	358.1	356.7	356.8	359.0	360.9	363.1
40°	400.7	383.4	367.4	355.7	348.3	345.5	344.9	346.4	348.9	351.1	353.6
42.5°	383.2	366.1	351.6	340.6	335.5	333.0	333.4	334.9	338.3	341.0	344.7
45°	356.0	341.8	327.6	318.7	314.4	315.0	315.0	317.7	321.2	325.2	329.2
47.5°	330.4	316.1	304.4	296.9	294.7	294.1	295.9	299.5	304.4	309.3	315.0
50°	313.1	299.6	289.4	282.7	280.2	281.1	283.6	286.9	292.8	299.0	304.8
52.5°	295.6	283.3	273.9	267.6	265.9	267.5	270.0	275.4	280.5	287.2	294.2
55°	268.5	258.0	250.6	246.0	245.3	246.3	249.1	254.9	262.3	270.6	277.4
57.5°	241.4	232.7	225.9	222.7	223.0	223.9	228.4	235.4	243.3	252.2	260.9
60°	223.2	215.2	209.6	207.2	207.5	209.3	214.8	221.3	231.2	239.8	249.1
62.5°	205.9	198.8	193.5	191.3	190.9	195.0	200.3	207.0	216.9	226.5	236.5
65°	178.2	172.6	168.3	167.1	167.9	171.0	177.8	186.8	195.1	205.3	215.8
67.5°	151.0	146.5	143.5	144.1	145.2	149.7	155.4	163.1	172.5	183.1	193.5
70°	133.8	129.4	127.0	127.3	129.1	134.7	139.7	147.3	157.5	168.3	176.9
72.5°	116.1	113.2	111.0	112.3	114.1	118.0	124.1	131.8	140.8	150.8	159.9
75°	89.0	89.0	87.9	88.8	91.6	95.2	99.9	107.9	116.8	124.8	132.2
77.5°	66.1	65.4	66.2	67.3	68.9	73.3	78.6	84.4	91.0	99.1	105.2
80°	50.5	50.9	52.4	54.3	54.9	58.2	63.8	69.1	74.3	81.0	86.9
82.5°	37.9	38.3	39.1	41.4	42.1	45.7	49.3	54.5	59.3	63.8	68.7
85°	20.7	20.7	22.2	23.1	24.6	27.1	29.3	32.4	36.7	39.8	44.4
87.5°	9.9	10.3	11.6	12.4	13.4	14.9	15.6	18.5	19.7	21.2	23.5
90°	10.2	12.0	13.4	14.8	16.2	17.7	18.7	19.8	20.8	21.9	22.7
92.5°	26.1	27.8	28.8	29.8	30.8	31.8	32.4	33.0	33.7	34.4	34.8
95°	54.6	56.0	57.3	58.5	59.7	61.0	61.6	62.0	62.6	63.1	63.4
97.5°	89.3	90.6	92.1	93.6	95.0	96.5	97.1	97.8	98.4	99.0	99.3
100°	115.2	116.4	118.0	119.5	121.2	122.8	123.1	123.5	123.8	124.2	124.4
102.5°	143.0	143.9	145.4	146.8	148.3	149.7	150.3	150.8	151.2	151.8	152.1
105°	187.7	188.1	188.9	189.6	190.3	191.0	191.5	192.1	192.6	193.1	193.7
107.5°	235.2	235.4	235.4	235.6	235.7	235.8	236.3	236.8	237.3	237.8	238.0
110°	267.8	267.9	267.8	267.6	267.4	267.2	266.9	266.5	266.2	265.8	265.9



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	300.1	300.0	299.7	299.4	299.0	298.7	298.7	298.6	298.5	298.4	298.4
115°	349.9	349.7	349.4	349.0	348.6	348.3	348.1	347.9	347.8	347.6	347.4
117.5°	397.7	397.6	397.4	397.1	396.9	396.6	396.0	395.4	394.7	394.2	393.7
120°	431.4	431.5	430.9	430.4	429.9	429.4	428.5	427.5	426.7	425.8	425.5
122.5°	462.4	462.5	462.2	461.9	461.7	461.4	460.8	460.3	459.6	459.0	458.4
125°	509.6	509.5	509.3	509.1	509.0	508.8	508.4	508.1	507.7	507.4	507.0
127.5°	555.6	555.7	555.4	555.1	554.8	554.5	554.2	553.8	553.5	553.1	552.8
130°	586.4	586.6	586.6	586.6	586.6	586.6	586.3	585.9	585.6	585.2	584.7
132.5°	617.3	617.3	617.3	617.1	617.0	616.8	616.5	616.1	615.8	615.4	615.1
135°	661.6	662.1	662.1	662.1	662.1	662.1	661.7	661.4	661.0	660.7	660.2
137.5°	704.5	704.9	705.2	705.5	705.8	706.1	705.6	705.1	704.6	704.2	704.0
140°	734.1	734.3	734.3	734.3	734.3	734.3	734.1	734.0	733.8	733.6	733.4
142.5°	761.8	761.8	761.7	761.5	761.4	761.3	761.2	761.2	761.1	761.1	761.0
145°	801.4	801.8	802.0	802.2	802.3	802.5	802.3	802.2	802.0	801.8	801.5
147.5°	839.8	840.2	840.0	839.9	839.7	839.6	839.5	839.3	839.2	839.0	838.8
150°	862.4	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.6
152.5°	883.0	883.3	883.4	883.6	883.8	883.9	884.3	884.7	885.2	885.6	885.6
155°	914.9	914.8	914.6	914.4	914.3	914.1	914.8	915.5	916.2	917.0	917.0
157.5°	941.8	941.7	941.6	941.6	941.5	941.5	942.1	942.6	943.1	943.6	943.6
160°	959.1	958.9	958.7	958.5	958.4	958.2	958.7	959.3	959.8	960.4	960.1
162.5°	973.4	973.0	972.9	972.7	972.5	972.3	973.3	974.2	975.2	976.2	976.2
165°	993.8	993.3	993.0	992.6	992.3	991.9	993.0	994.0	995.1	996.2	996.3
167.5°	1008.8	1008.4	1008.5	1008.5	1008.5	1008.6	1009.6	1010.7	1011.8	1012.9	1012.9
170°	1017.2	1016.8	1017.1	1017.2	1017.4	1017.6	1018.7	1019.7	1020.8	1021.8	1021.8
172.5°	1024.2	1023.9	1023.9	1024.0	1024.0	1024.0	1025.2	1026.4	1027.6	1028.9	1028.8
175°	1032.5	1032.0	1031.7	1031.6	1031.4	1031.3	1032.5	1033.7	1035.0	1036.3	1036.3
177.5°	1036.1	1035.7	1035.7	1035.7	1035.7	1035.7	1036.7	1037.8	1038.7	1039.7	1039.7
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	709.0	708.5	706.8	706.5	706.8	708.5	709.0	709.6	710.3	712.7	709.8
5°	655.0	653.5	652.5	655.9	652.5	653.5	655.0	656.8	659.9	660.2	663.3
7.5°	614.3	613.0	610.3	609.4	610.3	613.0	614.3	615.4	618.5	621.1	625.7
10°	588.1	586.8	584.4	583.8	584.4	586.8	588.1	591.2	594.2	597.6	600.7
12.5°	562.9	560.5	560.0	560.6	560.0	560.5	562.9	567.0	575.0	575.0	575.6
15°	529.5	528.3	524.9	525.9	524.9	528.3	529.5	533.5	537.3	541.9	546.4
17.5°	496.6	495.1	491.0	494.6	491.0	495.1	496.6	498.8	503.5	510.1	517.0
20°	475.9	473.4	471.3	471.0	471.3	473.4	475.9	478.1	483.3	488.9	494.1
22.5°	456.1	453.9	453.8	451.7	453.8	453.9	456.1	459.5	464.8	467.9	472.9
25°	431.5	429.4	428.7	427.2	428.7	429.4	431.5	434.0	437.4	439.8	445.4
27.5°	412.6	411.5	410.4	410.9	410.4	411.5	412.6	412.9	414.5	417.7	420.9
30°	401.0	400.7	400.1	400.1	400.1	400.7	401.0	400.1	401.6	403.1	405.6
32.5°	391.4	391.3	391.7	391.7	391.7	391.3	391.4	390.0	390.5	391.1	392.3
35°	377.9	378.8	379.5	378.5	379.5	378.8	377.9	376.7	375.7	373.6	374.1
37.5°	365.7	366.6	367.5	368.5	367.5	366.6	365.7	363.1	360.9	359.0	356.8
40°	356.3	358.5	359.1	360.6	359.1	358.5	356.3	353.6	351.1	348.9	346.4
42.5°	347.5	349.8	351.4	351.7	351.4	349.8	347.5	344.7	341.0	338.3	334.9
45°	333.8	336.3	338.4	338.4	338.4	336.3	333.8	329.2	325.2	321.2	317.7
47.5°	319.7	323.3	325.4	326.0	325.4	323.3	319.7	315.0	309.3	304.4	299.5
50°	310.1	314.4	316.6	318.1	316.6	314.4	310.1	304.8	299.0	292.8	286.9
52.5°	300.7	305.0	307.9	308.7	307.9	305.0	300.7	294.2	287.2	280.5	275.4
55°	284.5	290.7	294.1	295.2	294.1	290.7	284.5	277.4	270.6	262.3	254.9
57.5°	269.2	274.9	278.8	279.7	278.8	274.9	269.2	260.9	252.2	243.3	235.4
60°	257.4	263.6	268.5	269.4	268.5	263.6	257.4	249.1	239.8	231.2	221.3
62.5°	245.3	251.7	256.1	258.6	256.1	251.7	245.3	236.5	226.5	216.9	207.0
65°	224.4	230.8	235.2	236.1	235.2	230.8	224.4	215.8	205.3	195.1	186.8
67.5°	201.6	208.0	210.9	212.7	210.9	208.0	201.6	193.5	183.1	172.5	163.1
70°	185.5	190.8	193.8	195.4	193.8	190.8	185.5	176.9	168.3	157.5	147.3
72.5°	167.3	172.8	176.3	176.7	176.3	172.8	167.3	159.9	150.8	140.8	131.8
75°	139.3	144.3	146.1	146.1	146.1	144.3	139.3	132.2	124.8	116.8	107.9
77.5°	110.3	112.8	115.2	115.7	115.2	112.8	110.3	105.2	99.1	91.0	84.4
80°	91.6	93.1	94.9	94.9	94.9	93.1	91.6	86.9	81.0	74.3	69.1
82.5°	72.3	73.6	75.4	75.2	75.4	73.6	72.3	68.7	63.8	59.3	54.5
85°	43.7	46.6	46.3	45.6	46.3	46.6	43.7	44.4	39.8	36.7	32.4
87.5°	24.3	24.6	25.4	26.0	25.4	24.6	24.3	23.5	21.2	19.7	18.5
90°	23.0	23.4	23.7	24.1	23.7	23.4	23.0	22.7	21.9	20.8	19.8
92.5°	35.0	35.2	35.4	35.6	35.4	35.2	35.0	34.8	34.4	33.7	33.0
95°	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.1	62.6	62.0
97.5°	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.0	98.4	97.8
100°	124.4	124.4	124.4	124.4	124.4	124.4	124.4	124.4	124.2	123.8	123.5
102.5°	152.2	152.3	152.5	152.7	152.5	152.3	152.2	152.1	151.8	151.2	150.8
105°	194.2	194.7	195.3	195.8	195.3	194.7	194.2	193.7	193.1	192.6	192.1
107.5°	238.0	238.0	237.9	237.9	237.9	238.0	238.0	238.0	237.8	237.3	236.8
110°	266.4	267.0	267.5	268.1	267.5	267.0	266.4	265.9	265.8	266.2	266.5



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	298.6	298.7	298.7	298.9	298.7	298.7	298.6	298.4	298.4	298.5	298.6
115°	347.2	347.1	346.9	346.7	346.9	347.1	347.2	347.4	347.6	347.8	347.9
117.5°	393.3	393.0	392.6	392.3	392.6	393.0	393.3	393.7	394.2	394.7	395.4
120°	425.9	426.2	426.6	426.9	426.6	426.2	425.9	425.5	425.8	426.7	427.5
122.5°	457.7	457.1	456.5	455.8	456.5	457.1	457.7	458.4	459.0	459.6	460.3
125°	506.7	506.3	506.0	505.6	506.0	506.3	506.7	507.0	507.4	507.7	508.1
127.5°	552.5	552.2	551.9	551.7	551.9	552.2	552.5	552.8	553.1	553.5	553.8
130°	584.0	583.3	582.6	581.9	582.6	583.3	584.0	584.7	585.2	585.6	585.9
132.5°	614.8	614.5	614.2	613.9	614.2	614.5	614.8	615.1	615.4	615.8	616.1
135°	659.7	659.1	658.6	658.1	658.6	659.1	659.7	660.2	660.7	661.0	661.4
137.5°	704.1	704.3	704.3	704.4	704.3	704.3	704.1	704.0	704.2	704.6	705.1
140°	733.2	733.1	732.8	732.7	732.8	733.1	733.2	733.4	733.6	733.8	734.0
142.5°	761.0	761.0	761.0	761.0	761.0	761.0	761.0	761.0	761.1	761.1	761.2
145°	800.9	800.3	799.9	799.3	799.9	800.3	800.9	801.5	801.8	802.0	802.2
147.5°	838.7	838.5	838.3	838.1	838.3	838.5	838.7	838.8	839.0	839.2	839.3
150°	862.4	862.3	862.1	861.9	862.1	862.3	862.4	862.6	862.7	862.7	862.7
152.5°	885.1	884.6	884.2	883.8	884.2	884.6	885.1	885.6	885.6	885.2	884.7
155°	916.2	915.5	914.8	914.1	914.8	915.5	916.2	917.0	917.0	916.2	915.5
157.5°	943.0	942.4	941.8	941.2	941.8	942.4	943.0	943.6	943.6	943.1	942.6
160°	959.3	958.4	957.5	956.6	957.5	958.4	959.3	960.1	960.4	959.8	959.3
162.5°	975.3	974.5	973.5	972.6	973.5	974.5	975.3	976.2	976.2	975.2	974.2
165°	995.6	994.9	994.2	993.5	994.2	994.9	995.6	996.3	996.2	995.1	994.0
167.5°	1011.8	1010.7	1009.6	1008.4	1009.6	1010.7	1011.8	1012.9	1012.9	1011.8	1010.7
170°	1020.6	1019.3	1018.0	1016.8	1018.0	1019.3	1020.6	1021.8	1021.8	1020.8	1019.7
172.5°	1027.6	1026.4	1025.1	1023.8	1025.1	1026.4	1027.6	1028.8	1028.9	1027.6	1026.4
175°	1035.0	1033.7	1032.5	1031.3	1032.5	1033.7	1035.0	1036.3	1036.3	1035.0	1033.7
177.5°	1038.5	1037.4	1036.3	1035.1	1036.3	1037.4	1038.5	1039.7	1039.7	1038.7	1037.8
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	711.2	712.3	716.2	719.9	724.3	727.5	729.8	732.2	737.4	741.6	745.5
5°	666.4	667.9	676.0	681.5	691.0	699.3	705.8	712.9	721.3	732.6	743.1
7.5°	626.9	632.6	641.4	650.4	660.1	671.0	680.5	691.2	705.5	721.2	737.4
10°	604.4	610.9	620.1	630.7	639.8	652.5	664.2	676.8	693.2	712.3	731.4
12.5°	582.0	592.6	599.7	612.1	622.1	632.6	645.0	661.6	680.6	700.7	723.7
15°	553.9	559.8	573.3	580.1	594.2	610.3	622.6	639.3	657.7	684.3	710.1
17.5°	521.4	529.2	540.0	552.9	569.2	581.7	597.1	614.2	637.5	663.8	696.2
20°	500.3	506.8	520.0	534.2	551.4	564.7	581.0	597.6	621.7	649.7	683.7
22.5°	481.3	487.5	501.5	514.7	531.5	547.6	564.7	584.1	607.1	636.7	671.3
25°	451.9	460.2	472.5	486.1	502.1	520.6	539.1	556.3	581.0	612.1	649.1
27.5°	425.8	432.5	441.4	456.8	475.0	492.8	511.2	532.9	556.6	589.5	627.9
30°	409.0	415.2	424.1	438.3	455.3	474.4	493.5	514.4	539.1	571.7	610.9
32.5°	395.7	400.4	408.4	421.0	436.5	456.6	475.5	497.2	523.1	555.2	593.4
35°	376.0	380.0	383.1	395.1	409.0	427.5	446.6	469.8	494.7	525.2	563.4
37.5°	356.7	358.1	362.6	370.5	383.9	400.9	418.7	441.4	467.0	498.0	532.5
40°	344.9	345.5	348.3	355.7	367.4	383.4	400.7	423.2	447.5	476.8	511.0
42.5°	333.4	333.0	335.5	340.6	351.6	366.1	383.2	403.7	428.1	455.1	487.4
45°	315.0	315.0	314.4	318.7	327.6	341.8	356.0	375.7	396.1	422.6	449.7
47.5°	295.9	294.1	294.7	296.9	304.4	316.1	330.4	346.6	364.5	387.0	410.7
50°	283.6	281.1	280.2	282.7	289.4	299.6	313.1	327.3	344.3	364.0	384.4
52.5°	270.0	267.5	265.9	267.6	273.9	283.3	295.6	308.1	323.3	339.4	357.0
55°	249.1	246.3	245.3	246.0	250.6	258.0	268.5	279.9	291.3	304.5	316.9
57.5°	228.4	223.9	223.0	222.7	225.9	232.7	241.4	251.3	259.6	267.6	280.7
60°	214.8	209.3	207.5	207.2	209.6	215.2	223.2	233.0	238.8	244.4	255.8
62.5°	200.3	195.0	190.9	191.3	193.5	198.8	205.9	213.0	216.9	223.0	230.7
65°	177.8	171.0	167.9	167.1	168.3	172.6	178.2	182.8	187.1	189.6	196.9
67.5°	155.4	149.7	145.2	144.1	143.5	146.5	151.0	153.8	156.9	159.1	163.4
70°	139.7	134.7	129.1	127.3	127.0	129.4	133.8	134.1	138.4	139.3	143.9
72.5°	124.1	118.0	114.1	112.3	111.0	113.2	116.1	116.8	119.1	120.8	123.3
75°	99.9	95.2	91.6	88.8	87.9	89.0	89.0	90.6	92.1	93.1	95.9
77.5°	78.6	73.3	68.9	67.3	66.2	65.4	66.1	67.0	66.3	67.9	68.5
80°	63.8	58.2	54.9	54.3	52.4	50.9	50.5	51.5	50.2	50.9	52.7
82.5°	49.3	45.7	42.1	41.4	39.1	38.3	37.9	37.4	37.4	37.3	37.6
85°	29.3	27.1	24.6	23.1	22.2	20.7	20.7	20.0	19.4	18.8	19.1
87.5°	15.6	14.9	13.4	12.4	11.6	10.3	9.9	8.8	8.2	7.5	6.9
90°	18.7	17.7	16.2	14.8	13.4	12.0	10.2	8.3	6.3	4.4	2.4
92.5°	32.4	31.8	30.8	29.8	28.8	27.8	26.1	23.9	21.7	19.4	17.2
95°	61.6	61.0	59.7	58.5	57.3	56.0	54.6	53.0	51.3	49.7	48.2
97.5°	97.1	96.5	95.0	93.6	92.1	90.6	89.3	87.9	86.7	85.4	84.1
100°	123.1	122.8	121.2	119.5	118.0	116.4	115.2	114.5	113.8	113.0	112.3
102.5°	150.3	149.7	148.3	146.8	145.4	143.9	143.0	142.8	142.4	142.2	141.9
105°	191.5	191.0	190.3	189.6	188.9	188.1	187.7	187.5	187.4	187.2	187.0
107.5°	236.3	235.8	235.7	235.6	235.4	235.4	235.2	235.0	234.7	234.6	234.3
110°	266.9	267.2	267.4	267.6	267.8	267.9	267.8	267.5	267.1	266.8	266.4



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	298.7	298.7	299.0	299.4	299.7	300.0	300.1	300.0	300.0	299.9	299.8
115°	348.1	348.3	348.6	349.0	349.4	349.7	349.9	349.9	349.9	349.9	349.9
117.5°	396.0	396.6	396.9	397.1	397.4	397.6	397.7	397.5	397.4	397.2	397.1
120°	428.5	429.4	429.9	430.4	430.9	431.5	431.4	430.7	430.0	429.3	428.6
122.5°	460.8	461.4	461.7	461.9	462.2	462.5	462.4	462.2	461.8	461.6	461.3
125°	508.4	508.8	509.0	509.1	509.3	509.5	509.6	509.6	509.6	509.6	509.6
127.5°	554.2	554.5	554.8	555.1	555.4	555.7	555.6	555.0	554.4	554.0	553.4
130°	586.3	586.6	586.6	586.6	586.6	586.6	586.4	585.8	585.3	584.8	584.2
132.5°	616.5	616.8	617.0	617.1	617.3	617.3	617.3	616.9	616.5	616.1	615.7
135°	661.7	662.1	662.1	662.1	662.1	662.1	661.6	660.4	659.4	658.3	657.3
137.5°	705.6	706.1	705.8	705.5	705.2	704.9	704.5	704.0	703.5	703.0	702.5
140°	734.1	734.3	734.3	734.3	734.3	734.3	734.1	733.8	733.4	733.1	732.7
142.5°	761.2	761.3	761.4	761.5	761.7	761.8	761.8	761.4	761.0	760.7	760.3
145°	802.3	802.5	802.3	802.2	802.0	801.8	801.4	800.7	799.9	799.2	798.5
147.5°	839.5	839.6	839.7	839.9	840.0	840.2	839.8	838.9	838.1	837.3	836.4
150°	862.7	862.7	862.7	862.7	862.7	862.7	862.4	861.7	860.9	860.2	859.5
152.5°	884.3	883.9	883.8	883.6	883.4	883.3	883.0	882.6	882.2	881.8	881.3
155°	914.8	914.1	914.3	914.4	914.6	914.8	914.9	914.9	914.9	914.9	914.9
157.5°	942.1	941.5	941.5	941.6	941.6	941.7	941.8	942.1	942.5	942.8	943.1
160°	958.7	958.2	958.4	958.5	958.7	958.9	959.1	959.3	959.4	959.6	959.8
162.5°	973.3	972.3	972.5	972.7	972.9	973.0	973.4	973.8	974.3	974.8	975.2
165°	993.0	991.9	992.3	992.6	993.0	993.3	993.8	994.3	994.8	995.4	995.9
167.5°	1009.6	1008.6	1008.5	1008.5	1008.5	1008.4	1008.8	1009.6	1010.3	1011.1	1011.8
170°	1018.7	1017.6	1017.4	1017.2	1017.1	1016.8	1017.2	1018.1	1019.0	1019.9	1020.8
172.5°	1025.2	1024.0	1024.0	1024.0	1023.9	1023.9	1024.2	1025.0	1025.7	1026.4	1027.2
175°	1032.5	1031.3	1031.4	1031.6	1031.7	1032.0	1032.5	1033.4	1034.3	1035.1	1036.0
177.5°	1036.7	1035.7	1035.7	1035.7	1035.7	1035.7	1036.1	1036.8	1037.5	1038.2	1038.9
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	749.0	751.5	754.6	760.1	762.1	764.5	767.9	767.7	768.7	772.4	780.3
5°	751.8	761.3	770.6	781.6	793.4	801.1	811.6	818.0	824.5	832.8	847.0
7.5°	752.9	768.0	785.0	804.5	821.8	841.8	857.4	872.0	885.3	902.9	919.7
10°	751.1	771.5	793.4	818.0	844.2	866.4	886.5	909.3	928.7	949.9	969.1
12.5°	747.9	772.5	801.8	829.3	860.0	892.8	917.7	940.8	966.6	991.1	1020.6
15°	740.7	774.3	808.5	844.9	885.8	923.8	959.8	989.7	1017.5	1054.2	1092.7
17.5°	731.4	767.6	810.8	854.8	897.7	941.0	985.6	1030.5	1065.6	1111.1	1141.3
20°	722.8	764.7	809.1	861.5	904.4	958.3	1002.7	1046.1	1094.2	1139.5	1175.6
22.5°	710.7	756.5	803.7	855.8	912.2	966.1	1017.5	1064.6	1112.7	1162.0	1205.6
25°	695.4	737.0	792.7	851.9	908.0	966.6	1025.5	1084.7	1136.4	1188.5	1229.2
27.5°	669.2	721.8	773.7	834.8	897.1	963.4	1026.4	1088.3	1142.5	1185.3	1210.6
30°	655.9	701.5	758.0	819.3	886.8	958.0	1023.6	1084.3	1134.9	1169.1	1179.2
32.5°	636.2	683.3	738.5	802.0	873.5	946.6	1014.9	1072.2	1114.4	1132.3	1120.1
35°	606.9	649.4	705.2	770.2	844.5	922.5	990.0	1038.4	1060.0	1043.1	1000.8
37.5°	571.7	613.9	669.9	733.8	810.7	889.9	951.0	985.8	978.7	936.5	873.5
40°	547.1	586.5	639.8	708.9	783.8	863.3	917.0	935.8	916.1	855.6	788.8
42.5°	519.8	558.2	611.7	678.3	757.6	831.0	877.7	879.3	846.3	774.0	706.9
45°	478.1	514.8	565.3	634.6	708.0	777.1	807.9	792.7	731.7	662.0	594.5
47.5°	437.0	468.7	518.6	584.4	654.0	712.2	727.5	700.3	635.3	567.6	505.0
50°	406.9	438.9	485.8	548.7	615.8	666.1	673.4	637.4	573.6	505.5	456.5
52.5°	378.0	409.8	455.0	513.1	574.6	620.0	620.2	578.5	514.9	454.2	408.6
55°	335.6	364.3	405.0	457.1	512.0	547.4	538.8	495.6	440.5	387.8	348.0
57.5°	294.9	319.8	357.3	400.8	449.1	478.3	464.0	422.5	373.2	328.5	298.3
60°	268.5	292.2	324.2	365.3	405.9	428.7	415.2	377.6	332.2	296.2	270.0
62.5°	242.8	262.8	293.7	329.2	366.9	383.9	371.8	334.7	295.6	262.9	241.6
65°	206.5	222.8	247.5	278.1	305.5	320.0	309.7	275.2	245.3	221.9	204.9
67.5°	172.6	185.4	204.1	228.5	251.8	259.7	250.4	226.3	201.1	182.3	170.3
70°	149.2	161.2	176.9	195.7	216.0	224.4	215.2	196.1	175.4	158.1	146.4
72.5°	128.7	138.0	151.3	167.4	183.2	191.6	185.3	166.9	149.5	136.7	126.7
75°	98.0	106.0	115.3	126.7	139.0	144.6	139.0	126.4	114.3	104.8	97.7
77.5°	71.3	75.6	82.7	91.3	98.9	103.2	98.4	89.8	82.5	76.0	72.4
80°	54.3	57.4	62.3	69.1	74.3	78.3	75.2	68.1	62.3	57.9	56.4
82.5°	39.5	41.5	44.8	49.8	53.3	55.4	54.0	48.9	46.5	42.6	41.1
85°	19.4	20.7	22.8	24.3	27.4	27.7	28.0	25.9	23.8	22.8	21.5
87.5°	7.5	8.2	9.3	10.5	11.7	12.3	12.4	12.6	11.9	11.9	11.1
90°	4.4	6.3	8.3	10.2	12.0	13.4	14.8	16.2	17.7	18.7	19.8
92.5°	19.4	21.7	23.9	26.1	27.8	28.8	29.8	30.8	31.8	32.4	33.0
95°	49.7	51.3	53.0	54.6	56.0	57.3	58.5	59.7	61.0	61.6	62.0
97.5°	85.4	86.7	87.9	89.3	90.6	92.1	93.6	95.0	96.5	97.1	97.8
100°	113.0	113.8	114.5	115.2	116.4	118.0	119.5	121.2	122.8	123.1	123.5
102.5°	142.2	142.4	142.8	143.0	143.9	145.4	146.8	148.3	149.7	150.3	150.8
105°	187.2	187.4	187.5	187.7	188.1	188.9	189.6	190.3	191.0	191.5	192.1
107.5°	234.6	234.7	235.0	235.2	235.4	235.4	235.6	235.7	235.8	236.3	236.8
110°	266.8	267.1	267.5	267.8	267.9	267.8	267.6	267.4	267.2	266.9	266.5



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	299.9	300.0	300.0	300.1	300.0	299.7	299.4	299.0	298.7	298.7	298.6
115°	349.9	349.9	349.9	349.9	349.7	349.4	349.0	348.6	348.3	348.1	347.9
117.5°	397.2	397.4	397.5	397.7	397.6	397.4	397.1	396.9	396.6	396.0	395.4
120°	429.3	430.0	430.7	431.4	431.5	430.9	430.4	429.9	429.4	428.5	427.5
122.5°	461.6	461.8	462.2	462.4	462.5	462.2	461.9	461.7	461.4	460.8	460.3
125°	509.6	509.6	509.6	509.6	509.5	509.3	509.1	509.0	508.8	508.4	508.1
127.5°	554.0	554.4	555.0	555.6	555.7	555.4	555.1	554.8	554.5	554.2	553.8
130°	584.8	585.3	585.8	586.4	586.6	586.6	586.6	586.6	586.6	586.3	585.9
132.5°	616.1	616.5	616.9	617.3	617.3	617.3	617.1	617.0	616.8	616.5	616.1
135°	658.3	659.4	660.4	661.6	662.1	662.1	662.1	662.1	662.1	661.7	661.4
137.5°	703.0	703.5	704.0	704.5	704.9	705.2	705.5	705.8	706.1	705.6	705.1
140°	733.1	733.4	733.8	734.1	734.3	734.3	734.3	734.3	734.3	734.1	734.0
142.5°	760.7	761.0	761.4	761.8	761.8	761.7	761.5	761.4	761.3	761.2	761.2
145°	799.2	799.9	800.7	801.4	801.8	802.0	802.2	802.3	802.5	802.3	802.2
147.5°	837.3	838.1	838.9	839.8	840.2	840.0	839.9	839.7	839.6	839.5	839.3
150°	860.2	860.9	861.7	862.4	862.7	862.7	862.7	862.7	862.7	862.7	862.7
152.5°	881.8	882.2	882.6	883.0	883.3	883.4	883.6	883.8	883.9	884.3	884.7
155°	914.9	914.9	914.9	914.9	914.8	914.6	914.4	914.3	914.1	914.8	915.5
157.5°	942.8	942.5	942.1	941.8	941.7	941.6	941.6	941.5	941.5	942.1	942.6
160°	959.6	959.4	959.3	959.1	958.9	958.7	958.5	958.4	958.2	958.7	959.3
162.5°	974.8	974.3	973.8	973.4	973.0	972.9	972.7	972.5	972.3	973.3	974.2
165°	995.4	994.8	994.3	993.8	993.3	993.0	992.6	992.3	991.9	993.0	994.0
167.5°	1011.1	1010.3	1009.6	1008.8	1008.4	1008.5	1008.5	1008.5	1008.6	1009.6	1010.7
170°	1019.9	1019.0	1018.1	1017.2	1016.8	1017.1	1017.2	1017.4	1017.6	1018.7	1019.7
172.5°	1026.4	1025.7	1025.0	1024.2	1023.9	1023.9	1024.0	1024.0	1024.0	1025.2	1026.4
175°	1035.1	1034.3	1033.4	1032.5	1032.0	1031.7	1031.6	1031.4	1031.3	1032.5	1033.7
177.5°	1038.2	1037.5	1036.8	1036.1	1035.7	1035.7	1035.7	1035.7	1035.7	1036.7	1037.8
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	744.0	744.0	744.0	744.0	744.0	744.0	744.0
2.5°	784.3	784.7	787.0	788.7	789.2	791.6	791.9
5°	853.2	858.4	868.5	869.5	871.0	879.1	872.9
7.5°	933.9	947.2	956.1	963.9	966.8	970.3	969.6
10°	985.7	1005.4	1015.3	1031.0	1031.7	1035.6	1033.2
12.5°	1037.8	1060.7	1078.6	1081.6	1094.7	1096.8	1100.3
15°	1111.4	1135.8	1160.8	1169.7	1187.9	1192.2	1199.0
17.5°	1180.7	1205.6	1223.1	1246.3	1253.7	1263.7	1257.0
20°	1218.7	1245.9	1268.0	1286.2	1294.0	1299.5	1298.9
22.5°	1241.7	1269.0	1287.0	1300.8	1308.0	1310.3	1310.2
25°	1256.0	1271.8	1277.3	1282.5	1274.5	1271.8	1273.0
27.5°	1216.1	1212.0	1197.5	1178.5	1158.8	1143.1	1134.6
30°	1161.1	1137.0	1115.2	1077.0	1057.2	1045.5	1035.0
32.5°	1083.2	1045.0	1003.0	968.0	945.5	928.1	925.5
35°	949.7	892.3	840.8	798.0	775.8	757.0	752.7
37.5°	807.4	747.8	701.5	663.7	639.8	626.6	614.3
40°	712.9	661.8	616.2	584.1	565.9	556.3	548.7
42.5°	640.2	593.4	548.1	523.6	507.2	501.4	496.9
45°	539.7	496.2	464.8	446.3	436.7	426.9	422.2
47.5°	459.2	423.9	403.1	387.5	377.2	371.4	368.4
50°	413.6	384.7	366.1	354.2	344.9	340.2	337.8
52.5°	373.2	349.4	333.9	324.3	318.1	314.7	313.6
55°	321.5	303.3	293.4	285.1	280.5	277.4	276.2
57.5°	279.4	265.5	257.5	250.6	248.8	246.2	245.3
60°	251.8	241.1	234.2	229.7	228.1	225.0	225.6
62.5°	227.4	218.6	212.8	210.2	208.1	205.5	206.4
65°	192.3	185.8	182.8	180.3	177.8	176.3	177.5
67.5°	161.4	156.9	152.7	151.3	150.1	149.9	148.5
70°	141.2	137.4	133.8	132.8	132.8	131.6	131.3
72.5°	121.7	119.0	116.5	115.8	114.9	115.3	114.1
75°	94.0	91.8	90.9	90.0	89.7	89.7	88.8
77.5°	69.5	67.9	66.4	66.4	65.3	64.9	64.7
80°	52.7	52.1	50.9	50.9	50.2	50.5	49.9
82.5°	39.6	38.7	38.5	38.0	37.2	37.2	36.6
85°	21.2	20.4	20.0	19.1	18.5	19.1	18.5
87.5°	11.6	11.6	11.4	11.0	10.9	10.9	10.2
90°	20.8	21.9	22.7	23.0	23.4	23.7	24.1
92.5°	33.7	34.4	34.8	35.0	35.2	35.4	35.6
95°	62.6	63.1	63.4	63.4	63.4	63.4	63.4
97.5°	98.4	99.0	99.3	99.3	99.3	99.3	99.3
100°	123.8	124.2	124.4	124.4	124.4	124.4	124.4
102.5°	151.2	151.8	152.1	152.2	152.3	152.5	152.7
105°	192.6	193.1	193.7	194.2	194.7	195.3	195.8
107.5°	237.3	237.8	238.0	238.0	238.0	237.9	237.9
110°	266.2	265.8	265.9	266.4	267.0	267.5	268.1



TEST NUMBER: P332758-927

CATALOG NUMBER: S124DIW-S575D1050U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	298.5	298.4	298.4	298.6	298.7	298.7	298.9
115°	347.8	347.6	347.4	347.2	347.1	346.9	346.7
117.5°	394.7	394.2	393.7	393.3	393.0	392.6	392.3
120°	426.7	425.8	425.5	425.9	426.2	426.6	426.9
122.5°	459.6	459.0	458.4	457.7	457.1	456.5	455.8
125°	507.7	507.4	507.0	506.7	506.3	506.0	505.6
127.5°	553.5	553.1	552.8	552.5	552.2	551.9	551.7
130°	585.6	585.2	584.7	584.0	583.3	582.6	581.9
132.5°	615.8	615.4	615.1	614.8	614.5	614.2	613.9
135°	661.0	660.7	660.2	659.7	659.1	658.6	658.1
137.5°	704.6	704.2	704.0	704.1	704.3	704.3	704.4
140°	733.8	733.6	733.4	733.2	733.1	732.8	732.7
142.5°	761.1	761.1	761.0	761.0	761.0	761.0	761.0
145°	802.0	801.8	801.5	800.9	800.3	799.9	799.3
147.5°	839.2	839.0	838.8	838.7	838.5	838.3	838.1
150°	862.7	862.7	862.6	862.4	862.3	862.1	861.9
152.5°	885.2	885.6	885.6	885.1	884.6	884.2	883.8
155°	916.2	917.0	917.0	916.2	915.5	914.8	914.1
157.5°	943.1	943.6	943.6	943.0	942.4	941.8	941.2
160°	959.8	960.4	960.1	959.3	958.4	957.5	956.6
162.5°	975.2	976.2	976.2	975.3	974.5	973.5	972.6
165°	995.1	996.2	996.3	995.6	994.9	994.2	993.5
167.5°	1011.8	1012.9	1012.9	1011.8	1010.7	1009.6	1008.4
170°	1020.8	1021.8	1021.8	1020.6	1019.3	1018.0	1016.8
172.5°	1027.6	1028.9	1028.8	1027.6	1026.4	1025.1	1023.8
175°	1035.0	1036.3	1036.3	1035.0	1033.7	1032.5	1031.3
177.5°	1038.7	1039.7	1039.7	1038.5	1037.4	1036.3	1035.1
180°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7

(END OF REPORT)