

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333708-830

Luminaire Tested: **S125RDIW-S1090D1050U830-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333708-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIW-S1090D1050U830-4F0-1E-UDD-A  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1050 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7966.6 lumens  
Efficiency: N/A  
Efficacy: 130.2 lumens/watt  
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47  
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 61.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

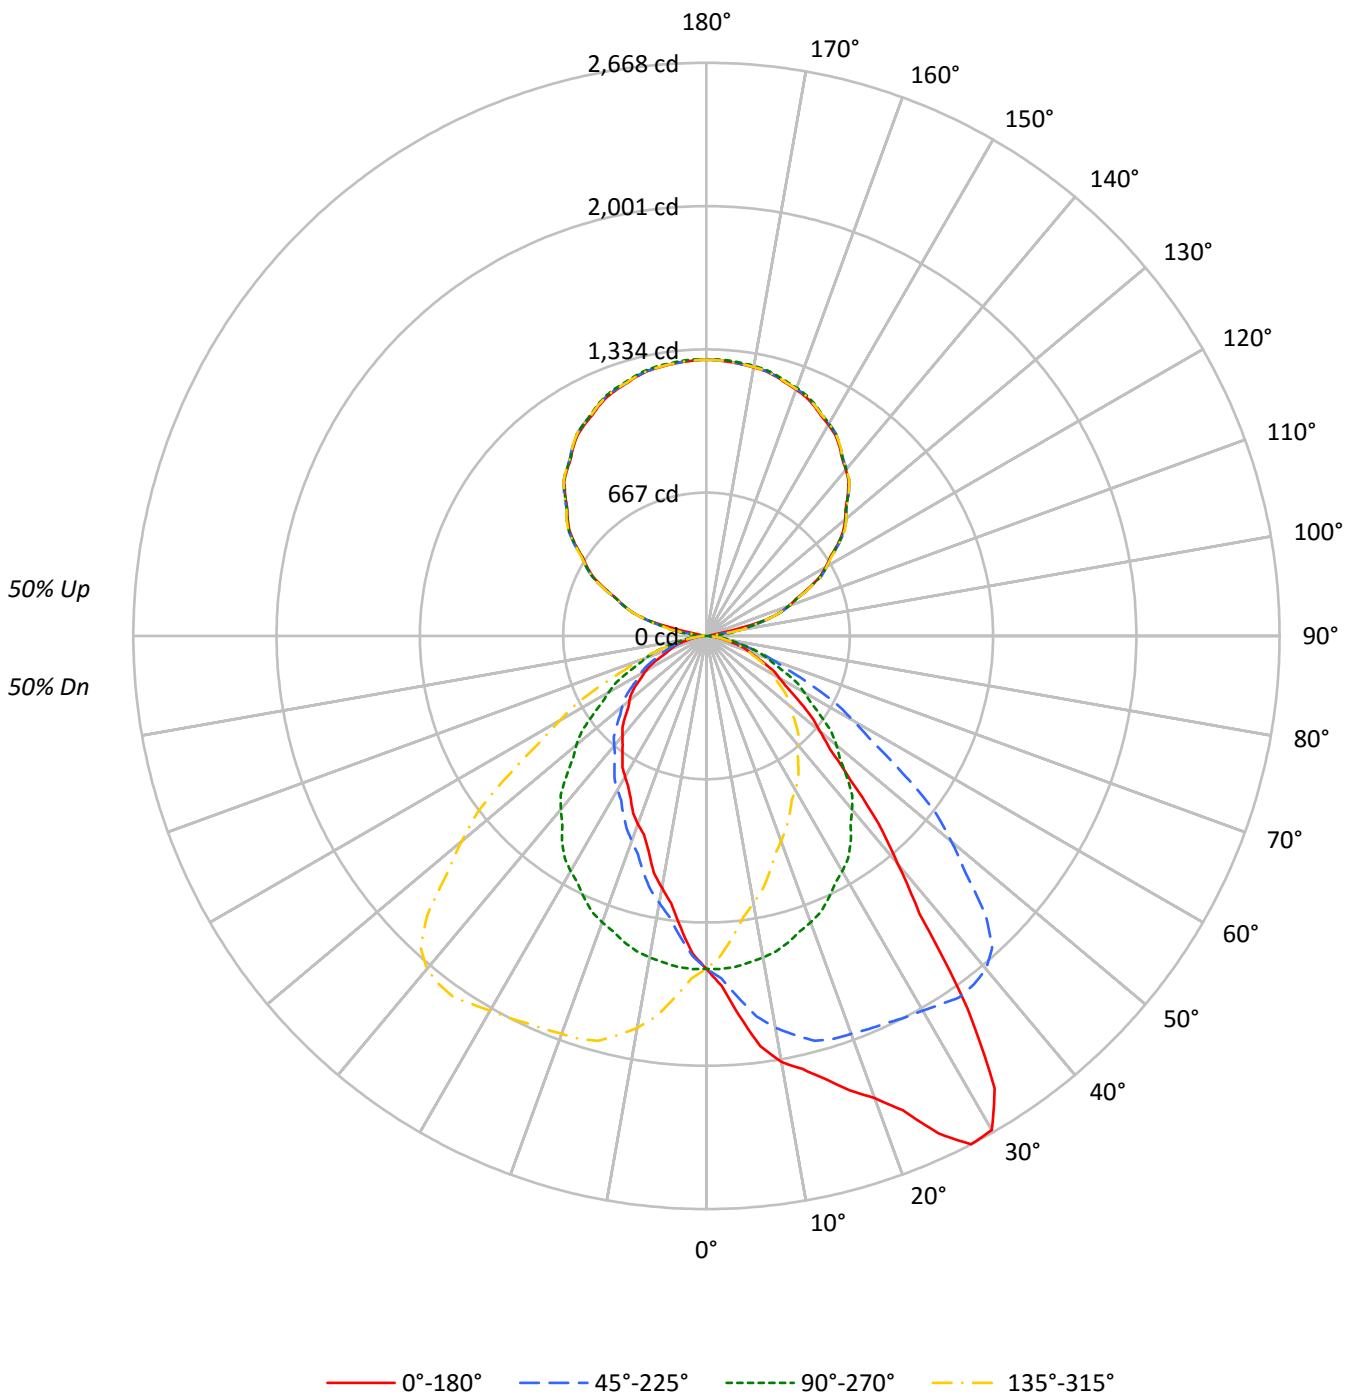



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	57	57	57	50
1	98	94	90	87	91	87	84	81	74	72	70	62	60	59	51	50	49	43
2	90	83	77	72	83	77	72	67	65	61	58	55	52	50	45	43	42	37
3	82	73	66	60	76	68	62	57	58	53	49	49	45	42	40	38	36	32
4	75	65	57	51	69	60	53	48	52	46	42	44	40	37	36	33	31	27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	33	30	27	24
6	64	52	44	38	59	48	41	36	42	36	32	36	31	28	30	27	24	21
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	27	24	21	19
8	55	43	35	30	51	40	33	28	35	29	25	30	25	22	25	22	19	17
9	51	39	32	27	47	36	30	25	32	26	23	27	23	20	23	20	17	15
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	10008	10008	10008	10008
5°	11514	10022	8851	10022
10°	13208	9971	7810	9971
15°	14266	9868	6942	9868
20°	15731	9750	6410	9750
25°	18206	9592	5947	9592
30°	19812	9426	5646	9426
35°	16712	9234	5367	9234
40°	11671	8887	5127	8887
45°	8658	8419	4892	8419
50°	6903	7932	4691	7932
55°	5860	7328	4513	7328
60°	5062	6788	4224	6788
65°	4511	6203	3636	6203
70°	3964	5682	3316	5682
75°	3429	4921	3112	4921
80°	2600	4139	2600	4139
85°	2164	3253	2453	3253



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	148.6	1.9
10°-20°	435.5	5.5
20°-30°	690.5	8.7
30°-40°	832.7	10.5
40°-50°	743.6	9.3
50°-60°	570.3	7.2
60°-70°	370.6	4.7
70°-80°	180.2	2.3
80°-90°	45.7	0.6
90°-100°	46.7	0.6
100°-110°	288.0	3.6
110°-120°	522.3	6.6
120°-130°	670.4	8.4
130°-140°	721.0	9.1
140°-150°	676.8	8.5
150°-160°	547.5	6.9
160°-170°	354.1	4.4
170°-180°	122.1	1.5
0°-30°	1274.6	16.0
0°-40°	2107.3	26.5
0°-60°	3421.2	42.9
0°-90°	4017.7	50.4
90°-120°	857.1	10.8
90°-150°	2925.3	36.7
90°-180°	3949.0	49.6
0°-180°	7966.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1550	1550	1550	1550	1550	
5°	1776	1546	1365	1546	1776	177
15°	2134	1476	1038	1476	2134	611
25°	2555	1346	835	1346	2555	1173
35°	2120	1171	681	1171	2120	1280
45°	948	922	536	922	948	756
55°	520	651	401	651	520	472
65°	295	406	238	406	295	294
75°	137	197	125	197	137	146
85°	29	44	33	44	29	34
90°	23	1	23	1	23	11
95°	20	54	20	54	20	17
105°	283	280	283	280	283	256
115°	522	526	522	526	522	519
125°	748	748	748	748	748	666
135°	929	933	929	933	929	717
145°	1079	1082	1079	1082	1079	674
155°	1183	1192	1183	1192	1183	545
165°	1251	1257	1251	1257	1251	353
175°	1280	1286	1280	1286	1280	122
180°	1286	1286	1286	1286	1286	



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1630.1	1629.1	1631.2	1625.5	1626.1	1617.4	1617.4	1610.8	1602.1	1595.5	1592.4
5°	1776.1	1777.4	1774.9	1765.4	1759.0	1749.5	1738.6	1719.6	1703.6	1688.4	1676.3
7.5°	1926.6	1927.4	1919.0	1916.1	1900.1	1888.4	1864.3	1838.3	1815.3	1786.1	1763.7
10°	2014.1	2013.5	2004.5	1997.5	1983.6	1965.8	1942.2	1911.7	1883.0	1851.2	1820.7
12.5°	2065.0	2063.3	2060.5	2052.0	2039.0	2023.3	2003.3	1973.2	1938.0	1903.2	1867.6
15°	2133.7	2129.2	2121.0	2110.2	2091.7	2073.2	2051.0	2024.3	1990.6	1951.1	1918.1
17.5°	2218.7	2218.8	2206.1	2191.0	2166.0	2133.4	2099.0	2056.0	2010.2	1966.8	1931.6
20°	2288.9	2287.0	2274.3	2245.0	2216.4	2175.7	2136.3	2083.4	2027.4	1970.9	1926.9
22.5°	2389.7	2384.7	2371.4	2333.1	2288.7	2236.3	2176.0	2111.4	2043.7	1979.4	1921.8
25°	2554.9	2551.0	2524.9	2480.4	2418.1	2337.2	2258.3	2169.9	2072.7	1988.0	1918.1
27.5°	2667.8	2663.6	2644.3	2607.3	2549.8	2464.7	2358.0	2239.8	2118.3	2001.9	1901.0
30°	2656.7	2666.2	2663.6	2646.5	2603.2	2526.9	2428.3	2295.3	2150.9	2014.1	1893.9
32.5°	2496.8	2505.4	2527.7	2561.5	2564.0	2533.5	2459.8	2337.0	2187.5	2031.9	1888.3
35°	2119.7	2131.2	2174.4	2242.5	2331.6	2405.9	2421.2	2355.0	2220.8	2053.5	1879.9
37.5°	1629.6	1692.1	1728.6	1800.3	1934.9	2071.7	2203.4	2251.9	2194.7	2044.7	1866.2
40°	1384.3	1399.6	1464.4	1545.2	1658.5	1801.0	1988.7	2124.1	2128.6	2024.3	1844.8
42.5°	1184.8	1204.1	1248.7	1313.2	1410.1	1552.7	1746.4	1925.1	2008.0	1968.3	1816.8
45°	947.9	962.5	994.9	1044.6	1119.0	1236.7	1403.4	1610.1	1774.2	1838.5	1741.8
47.5°	778.6	786.6	814.8	852.6	907.7	993.4	1122.5	1301.9	1498.8	1636.8	1623.2
50°	687.0	696.0	717.6	746.2	792.7	865.2	968.3	1117.8	1320.7	1489.2	1523.0
52.5°	615.8	623.2	636.7	663.7	702.1	757.8	841.0	976.3	1158.9	1338.1	1416.1
55°	520.4	525.5	536.3	551.6	582.1	622.2	694.1	787.6	935.2	1115.8	1230.3
57.5°	441.8	444.3	451.2	465.3	486.4	515.7	567.6	646.9	752.7	915.4	1041.8
60°	391.9	394.5	403.3	412.8	429.4	456.1	496.8	552.1	653.9	788.2	916.1
62.5°	352.1	353.7	357.5	367.0	381.5	402.2	434.2	479.4	560.3	678.3	799.0
65°	295.2	295.8	297.1	304.7	313.6	328.9	349.9	381.7	442.8	531.9	638.7
67.5°	240.4	241.4	245.8	248.5	257.8	265.8	278.1	302.5	345.4	405.5	488.6
70°	209.9	209.3	213.8	217.0	220.1	229.7	237.9	257.7	284.4	330.2	399.5
72.5°	181.4	179.7	181.7	182.9	187.0	193.5	201.8	213.9	234.5	266.1	319.1
75°	137.4	138.1	138.1	139.3	142.5	145.1	147.6	153.9	165.4	186.4	215.0
77.5°	96.4	95.4	98.1	98.5	100.4	103.2	105.4	107.9	112.6	121.2	136.0
80°	69.9	69.9	70.6	72.5	71.9	73.1	76.3	78.9	84.6	89.7	94.8
82.5°	53.7	53.2	53.8	54.2	54.1	55.3	56.5	57.0	59.2	61.7	65.2
85°	29.2	29.2	29.9	29.9	30.5	30.5	31.2	31.2	31.2	31.8	32.4
87.5°	15.7	15.2	14.5	14.3	14.8	15.6	14.9	14.1	13.9	13.8	13.9
90°	22.9	22.2	21.6	21.0	20.4	19.5	18.5	17.3	16.3	15.3	13.8
92.5°	21.4	21.0	20.7	20.5	20.2	19.5	18.5	17.3	16.3	15.3	13.9
95°	20.0	20.0	20.0	20.0	20.0	19.5	18.5	17.3	16.3	15.3	23.3
97.5°	20.0	20.0	20.0	20.0	20.0	23.0	28.9	35.0	40.9	46.9	62.9
100°	20.0	20.8	21.7	22.5	23.4	39.6	71.2	102.7	134.3	165.9	165.0
102.5°	119.9	134.3	148.7	163.2	177.6	187.8	193.7	199.6	205.7	211.6	211.1
105°	283.1	283.3	283.5	283.8	284.0	284.1	284.1	284.1	284.1	284.1	284.1
107.5°	356.9	357.5	358.2	358.8	359.5	359.8	359.7	359.7	359.6	359.6	359.1
110°	408.0	407.7	407.6	407.4	407.2	407.4	408.0	408.6	409.3	409.9	409.4



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	453.7	454.0	454.3	454.7	455.0	455.5	456.3	457.1	457.9	458.7	458.5
115°	522.4	523.7	524.9	526.2	527.4	528.5	529.3	530.2	531.0	531.9	531.7
117.5°	595.6	596.2	596.7	597.3	597.8	598.6	599.7	600.9	601.9	603.0	602.2
120°	640.6	641.7	642.7	643.8	644.8	645.5	646.0	646.4	646.9	647.2	646.6
122.5°	683.3	684.6	685.8	687.0	688.2	689.0	689.5	689.8	690.3	690.7	690.4
125°	748.3	748.9	749.6	750.3	750.8	751.6	752.4	753.3	754.1	755.0	755.0
127.5°	803.0	804.6	806.2	807.8	809.3	810.3	810.8	811.2	811.7	812.2	812.3
130°	842.7	843.8	844.8	845.8	846.9	847.7	848.4	849.0	849.7	850.3	850.1
132.5°	879.3	880.3	881.4	882.5	883.5	884.1	884.2	884.4	884.5	884.7	885.0
135°	929.4	930.7	932.0	933.2	934.5	935.4	935.8	936.2	936.6	937.1	937.5
137.5°	979.8	980.9	981.9	983.1	984.2	984.7	984.6	984.5	984.4	984.3	984.7
140°	1009.5	1010.8	1012.0	1013.3	1014.6	1015.0	1014.6	1014.2	1013.7	1013.3	1013.5
142.5°	1037.7	1039.0	1040.3	1041.5	1042.8	1043.4	1043.3	1043.2	1043.1	1043.0	1042.7
145°	1079.1	1080.3	1081.7	1082.9	1084.2	1084.7	1084.5	1084.3	1084.1	1083.8	1083.8
147.5°	1113.2	1114.7	1116.3	1117.8	1119.4	1119.9	1119.7	1119.5	1119.2	1118.9	1118.7
150°	1135.3	1137.0	1138.7	1140.4	1142.1	1142.7	1142.4	1141.9	1141.5	1141.0	1140.7
152.5°	1155.9	1157.4	1159.0	1160.5	1162.1	1162.5	1162.2	1161.7	1161.3	1160.8	1160.5
155°	1183.0	1184.7	1186.4	1188.1	1189.8	1190.3	1189.7	1189.0	1188.4	1187.8	1187.3
157.5°	1205.7	1207.4	1209.1	1210.8	1212.5	1213.0	1212.3	1211.6	1211.0	1210.2	1210.2
160°	1220.2	1221.9	1223.6	1225.3	1226.9	1227.4	1226.5	1225.7	1224.8	1224.0	1223.8
162.5°	1233.1	1235.0	1236.9	1238.7	1240.6	1241.0	1239.7	1238.6	1237.4	1236.1	1236.0
165°	1250.7	1252.4	1254.1	1255.7	1257.4	1257.6	1256.4	1255.1	1253.9	1252.5	1252.4
167.5°	1262.9	1264.8	1266.7	1268.6	1270.5	1270.7	1269.1	1267.6	1266.1	1264.6	1264.4
170°	1269.7	1271.7	1273.6	1275.4	1277.3	1277.5	1275.8	1274.1	1272.4	1270.7	1270.5
172.5°	1274.3	1276.2	1278.1	1280.1	1282.0	1282.1	1280.6	1279.1	1277.5	1276.0	1275.6
175°	1280.3	1282.1	1284.0	1285.9	1287.9	1288.0	1286.3	1284.6	1282.9	1281.2	1281.0
177.5°	1283.6	1285.1	1286.4	1287.7	1289.1	1289.2	1288.0	1286.8	1285.6	1284.4	1284.2
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1592.4	1588.8	1582.2	1576.1	1568.5	1561.9	1557.4	1551.7	1544.6	1536.0	1528.8
5°	1662.9	1648.9	1630.5	1614.6	1594.2	1578.3	1561.8	1545.9	1529.9	1509.6	1491.8
7.5°	1741.1	1712.1	1684.0	1648.7	1616.6	1588.0	1560.5	1532.7	1505.4	1476.5	1448.7
10°	1788.9	1753.9	1715.1	1670.6	1629.8	1591.0	1555.4	1520.4	1483.6	1451.0	1416.1
12.5°	1833.7	1788.5	1744.1	1687.9	1639.0	1591.6	1546.2	1502.6	1463.2	1421.1	1383.6
15°	1874.2	1829.6	1780.0	1711.3	1643.2	1585.9	1532.5	1475.9	1426.9	1379.8	1337.8
17.5°	1889.8	1843.0	1785.5	1719.4	1645.0	1573.0	1504.1	1442.1	1384.4	1329.6	1282.3
20°	1883.7	1838.5	1779.3	1716.4	1636.8	1561.8	1487.3	1418.6	1354.4	1296.5	1246.2
22.5°	1868.9	1822.2	1765.1	1698.6	1623.1	1543.4	1464.0	1390.6	1323.3	1263.4	1208.6
25°	1846.8	1783.2	1724.7	1659.7	1587.9	1509.0	1426.9	1346.1	1274.2	1213.1	1153.4
27.5°	1823.7	1744.4	1669.9	1605.4	1529.5	1459.1	1380.0	1297.1	1221.5	1159.3	1098.0
30°	1802.9	1713.8	1631.7	1558.6	1486.7	1419.9	1344.8	1264.0	1186.5	1122.2	1059.9
32.5°	1776.9	1682.2	1592.0	1507.7	1438.3	1372.1	1304.1	1226.9	1151.3	1085.1	1021.7
35°	1744.4	1623.5	1525.5	1435.8	1358.9	1294.6	1233.5	1171.2	1095.5	1026.8	965.1
37.5°	1701.6	1564.4	1451.0	1353.4	1272.1	1207.7	1159.4	1102.5	1033.4	967.6	910.3
40°	1675.7	1521.7	1397.6	1301.0	1215.7	1147.6	1102.5	1054.1	991.2	929.4	872.1
42.5°	1641.1	1482.5	1343.7	1242.9	1157.2	1091.7	1045.9	1003.7	950.9	892.8	831.4
45°	1573.2	1406.6	1260.8	1152.7	1066.2	1001.9	959.3	921.8	881.7	828.3	774.9
47.5°	1484.9	1327.3	1174.9	1056.8	972.0	912.4	871.0	841.4	812.8	767.3	715.4
50°	1414.2	1262.2	1113.2	998.8	908.4	851.8	813.0	789.5	763.4	722.1	678.8
52.5°	1330.7	1195.0	1049.1	932.1	846.9	793.8	756.5	733.0	711.5	677.8	636.5
55°	1199.2	1080.2	946.6	840.4	762.1	708.7	673.1	650.8	638.1	609.4	577.0
57.5°	1047.4	962.1	844.3	741.9	672.7	619.9	593.8	574.9	560.4	540.3	517.4
60°	941.5	881.7	776.1	678.8	615.2	564.9	541.4	525.5	512.1	494.9	477.1
62.5°	834.2	790.6	698.8	615.2	556.7	514.5	492.5	478.2	462.8	451.2	433.9
65°	690.2	651.4	587.8	522.3	468.3	434.5	418.6	405.9	396.3	383.6	371.6
67.5°	537.0	521.1	477.2	432.1	393.2	363.3	349.5	340.6	329.1	321.5	313.2
70°	442.8	435.2	404.0	374.1	337.8	317.4	304.7	300.9	286.9	279.3	273.5
72.5°	359.3	355.7	337.8	317.1	291.5	273.7	261.9	257.7	248.7	242.6	238.9
75°	246.2	247.5	244.3	230.9	221.4	209.9	199.7	197.2	190.9	185.8	182.6
77.5°	155.7	162.2	162.5	161.8	158.1	151.0	146.8	145.0	138.6	136.8	136.0
80°	106.9	113.9	120.3	119.6	118.3	116.4	113.2	111.3	108.1	106.2	105.0
82.5°	71.3	77.8	83.0	86.5	86.2	84.4	82.2	81.3	80.7	79.3	79.0
85°	33.7	35.0	36.9	41.4	44.5	45.1	44.5	43.9	41.9	42.6	43.3
87.5°	14.1	13.9	14.0	13.8	12.9	15.1	16.3	16.5	15.8	15.1	14.4
90°	12.3	10.8	9.3	7.7	6.0	4.3	2.6	0.9	2.6	4.3	6.0
92.5°	12.6	11.3	10.0	9.9	11.1	12.3	13.5	14.7	13.5	12.3	11.1
95°	31.4	39.4	47.4	51.8	52.4	53.1	53.7	54.3	53.7	53.1	52.4
97.5°	78.8	94.7	110.7	118.0	116.9	115.7	114.6	113.5	114.6	115.7	116.9
100°	164.2	163.3	162.5	161.7	161.1	160.4	159.9	159.2	159.9	160.4	161.1
102.5°	210.6	210.1	209.6	209.0	208.1	207.4	206.5	205.8	206.5	207.4	208.1
105°	284.1	284.1	284.1	283.6	282.8	281.9	281.1	280.2	281.1	281.9	282.8
107.5°	358.7	358.3	357.9	357.7	357.7	357.7	357.7	357.7	357.7	357.7	357.7
110°	409.1	408.6	408.2	408.0	408.0	408.0	408.0	408.0	408.0	408.0	408.0





TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	458.2	458.0	457.7	457.3	456.8	456.3	455.8	455.2	455.8	456.3	456.8
115°	531.5	531.3	531.0	530.5	529.3	528.3	527.3	526.2	527.3	528.3	529.3
117.5°	601.4	600.6	599.8	599.5	599.5	599.6	599.6	599.6	599.6	599.6	599.5
120°	646.0	645.4	644.7	644.5	644.7	644.9	645.2	645.4	645.2	644.9	644.7
122.5°	690.1	689.8	689.6	689.0	688.2	687.4	686.5	685.8	686.5	687.4	688.2
125°	755.0	755.0	755.0	754.2	752.7	751.3	749.8	748.3	749.8	751.3	752.7
127.5°	812.5	812.6	812.7	812.2	811.2	810.1	809.1	807.9	809.1	810.1	811.2
130°	849.9	849.7	849.4	848.9	847.7	846.7	845.6	844.6	845.6	846.7	847.7
132.5°	885.5	886.0	886.5	886.1	884.9	883.6	882.4	881.2	882.4	883.6	884.9
135°	937.9	938.3	938.8	938.3	937.1	935.8	934.5	933.2	934.5	935.8	937.1
137.5°	985.1	985.5	985.9	985.5	984.4	983.3	982.2	981.1	982.2	983.3	984.4
140°	1013.7	1014.0	1014.2	1014.1	1013.6	1013.2	1012.8	1012.4	1012.8	1013.2	1013.6
142.5°	1042.5	1042.2	1041.9	1041.6	1041.3	1041.1	1040.8	1040.6	1040.8	1041.1	1041.3
145°	1083.8	1083.8	1083.8	1083.6	1083.3	1082.8	1082.4	1081.9	1082.4	1082.8	1083.3
147.5°	1118.4	1118.1	1117.9	1117.9	1117.9	1118.0	1118.1	1118.1	1118.1	1118.0	1117.9
150°	1140.2	1139.8	1139.3	1139.3	1139.8	1140.2	1140.7	1141.0	1140.7	1140.2	1139.8
152.5°	1160.1	1159.6	1159.2	1159.4	1160.4	1161.3	1162.2	1163.2	1162.2	1161.3	1160.4
155°	1186.9	1186.5	1186.1	1186.5	1187.8	1189.0	1190.3	1191.6	1190.3	1189.0	1187.8
157.5°	1210.1	1210.1	1210.1	1210.4	1211.3	1212.0	1212.8	1213.5	1212.8	1212.0	1211.3
160°	1223.6	1223.3	1223.1	1223.7	1224.9	1226.2	1227.5	1228.8	1227.5	1226.2	1224.9
162.5°	1235.8	1235.6	1235.3	1235.9	1237.2	1238.4	1239.7	1241.0	1239.7	1238.4	1237.2
165°	1252.2	1252.0	1251.7	1252.3	1253.6	1254.8	1256.1	1257.4	1256.1	1254.8	1253.6
167.5°	1264.1	1263.9	1263.8	1264.3	1265.6	1267.0	1268.3	1269.5	1268.3	1267.0	1265.6
170°	1270.3	1270.1	1269.9	1270.5	1272.0	1273.5	1275.0	1276.4	1275.0	1273.5	1272.0
172.5°	1275.3	1274.9	1274.5	1275.1	1276.6	1278.0	1279.5	1281.0	1279.5	1278.0	1276.6
175°	1280.7	1280.5	1280.3	1280.8	1282.1	1283.4	1284.7	1285.9	1284.7	1283.4	1282.1
177.5°	1284.1	1283.9	1283.7	1284.2	1285.2	1286.2	1287.2	1288.3	1287.2	1286.2	1285.2
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1523.7	1516.6	1511.6	1501.4	1494.2	1491.2	1485.5	1484.0	1489.6	1485.5	1485.1
5°	1478.5	1460.0	1445.4	1430.7	1414.9	1404.7	1389.4	1386.9	1383.0	1377.2	1376.0
7.5°	1424.1	1400.1	1381.2	1357.1	1336.1	1319.2	1300.0	1291.0	1286.1	1278.7	1268.8
10°	1387.4	1358.9	1333.4	1309.2	1283.2	1262.2	1243.0	1228.4	1218.9	1209.9	1206.2
12.5°	1351.3	1322.2	1289.6	1260.4	1231.2	1207.7	1186.6	1177.0	1166.5	1156.0	1147.2
15°	1295.2	1256.4	1220.8	1187.0	1162.2	1136.8	1116.4	1102.5	1086.6	1082.1	1065.0
17.5°	1235.7	1197.6	1155.9	1120.4	1091.7	1063.7	1041.2	1025.4	1013.4	997.0	989.1
20°	1198.5	1153.4	1112.7	1080.2	1048.4	1015.3	992.4	979.0	967.6	954.2	947.9
22.5°	1158.9	1114.7	1073.0	1034.9	1002.6	970.1	953.8	939.9	926.9	914.5	906.2
25°	1100.5	1056.0	1012.1	972.7	939.0	915.4	896.4	880.4	873.5	861.4	852.4
27.5°	1042.9	995.6	950.1	910.7	884.3	861.0	845.4	832.7	820.1	809.5	801.8
30°	1005.8	957.4	907.8	876.7	848.7	826.3	809.2	797.1	787.6	778.1	772.3
32.5°	968.7	918.8	874.7	841.0	814.5	795.3	777.6	766.1	756.0	745.5	738.7
35°	909.1	858.2	822.6	789.5	763.4	745.6	733.5	717.0	708.7	701.1	694.1
37.5°	853.8	806.4	767.9	738.9	716.1	698.5	682.9	673.9	663.7	656.9	651.0
40°	813.0	769.8	734.8	704.3	687.7	668.0	653.4	641.9	634.2	625.4	619.0
42.5°	776.4	736.1	702.2	674.7	654.1	637.4	623.3	611.9	602.2	595.9	590.5
45°	724.6	684.5	651.4	625.9	606.9	591.0	576.4	570.6	557.9	550.3	547.7
47.5°	671.0	635.2	603.2	579.8	560.2	545.2	531.4	519.7	512.7	505.2	501.1
50°	634.9	600.5	570.6	547.7	528.7	512.1	499.4	491.7	482.2	475.2	470.1
52.5°	598.8	566.9	537.1	515.2	498.6	482.1	467.9	460.2	451.2	446.7	443.2
55°	547.1	513.4	488.0	466.3	449.1	433.9	420.5	412.8	407.2	402.7	401.4
57.5°	488.6	461.8	438.2	418.7	400.9	386.5	374.8	367.6	362.5	361.8	358.1
60°	450.4	426.2	404.6	383.6	368.3	355.0	344.8	336.5	331.4	330.8	329.5
62.5°	412.3	389.1	369.0	350.5	336.8	324.0	314.2	305.0	301.9	298.8	296.0
65°	355.6	334.6	318.1	303.4	288.8	278.0	268.4	262.8	255.7	251.9	245.0
67.5°	300.0	283.7	267.9	255.5	244.0	233.8	225.8	217.4	212.6	209.5	204.4
70°	263.3	250.6	234.8	221.4	212.4	204.2	197.8	188.3	185.1	182.6	180.0
72.5°	228.8	217.5	204.2	193.4	184.5	176.7	169.4	164.9	161.7	159.2	157.7
75°	180.0	169.2	157.8	150.1	143.7	137.4	133.6	130.4	129.1	128.5	125.9
77.5°	132.2	126.5	117.3	111.2	107.0	104.4	101.0	99.3	99.2	96.4	95.6
80°	101.1	97.9	90.3	87.8	84.6	82.1	80.1	77.0	73.8	72.5	70.6
82.5°	75.2	72.0	69.0	64.8	62.2	60.7	58.8	57.6	58.1	56.3	55.3
85°	40.1	36.9	35.6	35.0	33.7	35.0	34.3	33.7	33.1	32.4	33.1
87.5°	14.2	14.6	14.4	15.6	14.4	15.3	15.5	15.2	15.4	15.6	15.3
90°	7.7	9.3	10.8	12.3	13.8	15.3	16.3	17.3	18.5	19.5	20.4
92.5°	9.9	10.0	11.3	12.6	13.9	15.3	16.3	17.3	18.5	19.5	20.2
95°	51.8	47.4	39.4	31.4	23.3	15.3	16.3	17.3	18.5	19.5	20.0
97.5°	118.0	110.7	94.7	78.8	62.9	46.9	40.9	35.0	28.9	23.0	20.0
100°	161.7	162.5	163.3	164.2	165.0	165.9	134.3	102.7	71.2	39.6	23.4
102.5°	209.0	209.6	210.1	210.6	211.1	211.6	205.7	199.6	193.7	187.8	177.6
105°	283.6	284.1	284.1	284.1	284.1	284.1	284.1	284.1	284.1	284.1	284.0
107.5°	357.7	357.9	358.3	358.7	359.1	359.6	359.6	359.7	359.7	359.8	359.5
110°	408.0	408.2	408.6	409.1	409.4	409.9	409.3	408.6	408.0	407.4	407.2



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	457.3	457.7	458.0	458.2	458.5	458.7	457.9	457.1	456.3	455.5	455.0
115°	530.5	531.0	531.3	531.5	531.7	531.9	531.0	530.2	529.3	528.5	527.4
117.5°	599.5	599.8	600.6	601.4	602.2	603.0	601.9	600.9	599.7	598.6	597.8
120°	644.5	644.7	645.4	646.0	646.6	647.2	646.9	646.4	646.0	645.5	644.8
122.5°	689.0	689.6	689.8	690.1	690.4	690.7	690.3	689.8	689.5	689.0	688.2
125°	754.2	755.0	755.0	755.0	755.0	755.0	754.1	753.3	752.4	751.6	750.8
127.5°	812.2	812.7	812.6	812.5	812.3	812.2	811.7	811.2	810.8	810.3	809.3
130°	848.9	849.4	849.7	849.9	850.1	850.3	849.7	849.0	848.4	847.7	846.9
132.5°	886.1	886.5	886.0	885.5	885.0	884.7	884.5	884.4	884.2	884.1	883.5
135°	938.3	938.8	938.3	937.9	937.5	937.1	936.6	936.2	935.8	935.4	934.5
137.5°	985.5	985.9	985.5	985.1	984.7	984.3	984.4	984.5	984.6	984.7	984.2
140°	1014.1	1014.2	1014.0	1013.7	1013.5	1013.3	1013.7	1014.2	1014.6	1015.0	1014.6
142.5°	1041.6	1041.9	1042.2	1042.5	1042.7	1043.0	1043.1	1043.2	1043.3	1043.4	1042.8
145°	1083.6	1083.8	1083.8	1083.8	1083.8	1083.8	1084.1	1084.3	1084.5	1084.7	1084.2
147.5°	1117.9	1117.9	1118.1	1118.4	1118.7	1118.9	1119.2	1119.5	1119.7	1119.9	1119.4
150°	1139.3	1139.3	1139.8	1140.2	1140.7	1141.0	1141.5	1141.9	1142.4	1142.7	1142.1
152.5°	1159.4	1159.2	1159.6	1160.1	1160.5	1160.8	1161.3	1161.7	1162.2	1162.5	1162.1
155°	1186.5	1186.1	1186.5	1186.9	1187.3	1187.8	1188.4	1189.0	1189.7	1190.3	1189.8
157.5°	1210.4	1210.1	1210.1	1210.1	1210.2	1210.2	1211.0	1211.6	1212.3	1213.0	1212.5
160°	1223.7	1223.1	1223.3	1223.6	1223.8	1224.0	1224.8	1225.7	1226.5	1227.4	1226.9
162.5°	1235.9	1235.3	1235.6	1235.8	1236.0	1236.1	1237.4	1238.6	1239.7	1241.0	1240.6
165°	1252.3	1251.7	1252.0	1252.2	1252.4	1252.5	1253.9	1255.1	1256.4	1257.6	1257.4
167.5°	1264.3	1263.8	1263.9	1264.1	1264.4	1264.6	1266.1	1267.6	1269.1	1270.7	1270.5
170°	1270.5	1269.9	1270.1	1270.3	1270.5	1270.7	1272.4	1274.1	1275.8	1277.5	1277.3
172.5°	1275.1	1274.5	1274.9	1275.3	1275.6	1276.0	1277.5	1279.1	1280.6	1282.1	1282.0
175°	1280.8	1280.3	1280.5	1280.7	1281.0	1281.2	1282.9	1284.6	1286.3	1288.0	1287.9
177.5°	1284.2	1283.7	1283.9	1284.1	1284.2	1284.4	1285.6	1286.8	1288.0	1289.2	1289.1
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1484.5	1478.9	1477.4	1479.4	1477.4	1478.9	1484.5	1485.1	1485.5	1489.6	1484.0
5°	1369.7	1363.3	1366.5	1365.2	1366.5	1363.3	1369.7	1376.0	1377.2	1383.0	1386.9
7.5°	1268.7	1260.7	1252.4	1255.0	1252.4	1260.7	1268.7	1268.8	1278.7	1286.1	1291.0
10°	1197.9	1191.6	1187.7	1190.9	1187.7	1191.6	1197.9	1206.2	1209.9	1218.9	1228.4
12.5°	1138.3	1134.5	1131.2	1129.8	1131.2	1134.5	1138.3	1147.2	1156.0	1166.5	1177.0
15°	1057.3	1049.7	1046.5	1038.2	1046.5	1049.7	1057.3	1065.0	1082.1	1086.6	1102.5
17.5°	982.6	980.1	971.8	968.3	971.8	980.1	982.6	989.1	997.0	1013.4	1025.4
20°	938.3	935.8	927.6	932.6	927.6	935.8	938.3	947.9	954.2	967.6	979.0
22.5°	901.7	896.1	893.4	891.9	893.4	896.1	901.7	906.2	914.5	926.9	939.9
25°	849.9	841.6	838.5	834.6	838.5	841.6	849.9	852.4	861.4	873.5	880.4
27.5°	798.2	793.8	789.6	788.6	789.6	793.8	798.2	801.8	809.5	820.1	832.7
30°	764.7	760.3	757.1	757.1	757.1	760.3	764.7	772.3	778.1	787.6	797.1
32.5°	734.6	731.2	728.0	727.5	728.0	731.2	734.6	738.7	745.5	756.0	766.1
35°	690.9	685.8	684.5	680.7	684.5	685.8	690.9	694.1	701.1	708.7	717.0
37.5°	645.5	641.2	641.1	640.7	641.1	641.2	645.5	651.0	656.9	663.7	673.9
40°	616.4	613.2	612.7	608.1	612.7	613.2	616.4	619.0	625.4	634.2	641.9
42.5°	585.4	583.7	581.5	579.7	581.5	583.7	585.4	590.5	595.9	602.2	611.9
45°	543.3	538.9	538.9	535.6	538.9	538.9	543.3	547.7	550.3	557.9	570.6
47.5°	499.7	496.3	496.7	493.4	496.7	496.3	499.7	501.1	505.2	512.7	519.7
50°	470.8	468.8	468.3	466.9	468.3	468.8	470.8	470.1	475.2	482.2	491.7
52.5°	441.8	440.8	443.3	440.5	443.3	440.8	441.8	443.2	446.7	451.2	460.2
55°	402.7	400.8	404.6	400.8	404.6	400.8	402.7	401.4	402.7	407.2	412.8
57.5°	357.8	356.0	359.4	357.5	359.4	356.0	357.8	358.1	361.8	362.5	367.6
60°	328.3	324.4	326.3	327.0	326.3	324.4	328.3	329.5	330.8	331.4	336.5
62.5°	293.1	290.9	292.3	289.4	292.3	290.9	293.1	296.0	298.8	301.9	305.0
65°	243.6	241.8	239.2	237.9	239.2	241.8	243.6	245.0	251.9	255.7	262.8
67.5°	204.7	200.1	200.0	201.0	200.0	200.1	204.7	204.4	209.5	212.6	217.4
70°	176.3	176.3	175.6	175.6	175.6	176.3	176.3	180.0	182.6	185.1	188.3
72.5°	156.4	155.9	154.7	154.2	154.7	155.9	156.4	157.7	159.2	161.7	164.9
75°	125.9	126.6	125.4	124.7	125.4	126.6	125.9	125.9	128.5	129.1	130.4
77.5°	93.0	90.3	91.7	90.3	91.7	90.3	93.0	95.6	96.4	99.2	99.3
80°	70.6	69.9	71.9	69.9	71.9	69.9	70.6	70.6	72.5	73.8	77.0
82.5°	55.9	55.2	56.1	54.7	56.1	55.2	55.9	55.3	56.3	58.1	57.6
85°	33.7	33.1	32.4	33.1	32.4	33.1	33.7	33.1	32.4	33.1	33.7
87.5°	15.9	15.6	15.6	15.7	15.6	15.6	15.9	15.3	15.6	15.4	15.2
90°	21.0	21.6	22.2	22.9	22.2	21.6	21.0	20.4	19.5	18.5	17.3
92.5°	20.5	20.7	21.0	21.4	21.0	20.7	20.5	20.2	19.5	18.5	17.3
95°	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	19.5	18.5	17.3
97.5°	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	23.0	28.9	35.0
100°	22.5	21.7	20.8	20.0	20.8	21.7	22.5	23.4	39.6	71.2	102.7
102.5°	163.2	148.7	134.3	119.9	134.3	148.7	163.2	177.6	187.8	193.7	199.6
105°	283.8	283.5	283.3	283.1	283.3	283.5	283.8	284.0	284.1	284.1	284.1
107.5°	358.8	358.2	357.5	356.9	357.5	358.2	358.8	359.5	359.8	359.7	359.7
110°	407.4	407.6	407.7	408.0	407.7	407.6	407.4	407.2	407.4	408.0	408.6



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	454.7	454.3	454.0	453.7	454.0	454.3	454.7	455.0	455.5	456.3	457.1
115°	526.2	524.9	523.7	522.4	523.7	524.9	526.2	527.4	528.5	529.3	530.2
117.5°	597.3	596.7	596.2	595.6	596.2	596.7	597.3	597.8	598.6	599.7	600.9
120°	643.8	642.7	641.7	640.6	641.7	642.7	643.8	644.8	645.5	646.0	646.4
122.5°	687.0	685.8	684.6	683.3	684.6	685.8	687.0	688.2	689.0	689.5	689.8
125°	750.3	749.6	748.9	748.3	748.9	749.6	750.3	750.8	751.6	752.4	753.3
127.5°	807.8	806.2	804.6	803.0	804.6	806.2	807.8	809.3	810.3	810.8	811.2
130°	845.8	844.8	843.8	842.7	843.8	844.8	845.8	846.9	847.7	848.4	849.0
132.5°	882.5	881.4	880.3	879.3	880.3	881.4	882.5	883.5	884.1	884.2	884.4
135°	933.2	932.0	930.7	929.4	930.7	932.0	933.2	934.5	935.4	935.8	936.2
137.5°	983.1	981.9	980.9	979.8	980.9	981.9	983.1	984.2	984.7	984.6	984.5
140°	1013.3	1012.0	1010.8	1009.5	1010.8	1012.0	1013.3	1014.6	1015.0	1014.6	1014.2
142.5°	1041.5	1040.3	1039.0	1037.7	1039.0	1040.3	1041.5	1042.8	1043.4	1043.3	1043.2
145°	1082.9	1081.7	1080.3	1079.1	1080.3	1081.7	1082.9	1084.2	1084.7	1084.5	1084.3
147.5°	1117.8	1116.3	1114.7	1113.2	1114.7	1116.3	1117.8	1119.4	1119.9	1119.7	1119.5
150°	1140.4	1138.7	1137.0	1135.3	1137.0	1138.7	1140.4	1142.1	1142.7	1142.4	1141.9
152.5°	1160.5	1159.0	1157.4	1155.9	1157.4	1159.0	1160.5	1162.1	1162.5	1162.2	1161.7
155°	1188.1	1186.4	1184.7	1183.0	1184.7	1186.4	1188.1	1189.8	1190.3	1189.7	1189.0
157.5°	1210.8	1209.1	1207.4	1205.7	1207.4	1209.1	1210.8	1212.5	1213.0	1212.3	1211.6
160°	1225.3	1223.6	1221.9	1220.2	1221.9	1223.6	1225.3	1226.9	1227.4	1226.5	1225.7
162.5°	1238.7	1236.9	1235.0	1233.1	1235.0	1236.9	1238.7	1240.6	1241.0	1239.7	1238.6
165°	1255.7	1254.1	1252.4	1250.7	1252.4	1254.1	1255.7	1257.4	1257.6	1256.4	1255.1
167.5°	1268.6	1266.7	1264.8	1262.9	1264.8	1266.7	1268.6	1270.5	1270.7	1269.1	1267.6
170°	1275.4	1273.6	1271.7	1269.7	1271.7	1273.6	1275.4	1277.3	1277.5	1275.8	1274.1
172.5°	1280.1	1278.1	1276.2	1274.3	1276.2	1278.1	1280.1	1282.0	1282.1	1280.6	1279.1
175°	1285.9	1284.0	1282.1	1280.3	1282.1	1284.0	1285.9	1287.9	1288.0	1286.3	1284.6
177.5°	1287.7	1286.4	1285.1	1283.6	1285.1	1286.4	1287.7	1289.1	1289.2	1288.0	1286.8
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1485.5	1491.2	1494.2	1501.4	1511.6	1516.6	1523.7	1528.8	1536.0	1544.6	1551.7
5°	1389.4	1404.7	1414.9	1430.7	1445.4	1460.0	1478.5	1491.8	1509.6	1529.9	1545.9
7.5°	1300.0	1319.2	1336.1	1357.1	1381.2	1400.1	1424.1	1448.7	1476.5	1505.4	1532.7
10°	1243.0	1262.2	1283.2	1309.2	1333.4	1358.9	1387.4	1416.1	1451.0	1483.6	1520.4
12.5°	1186.6	1207.7	1231.2	1260.4	1289.6	1322.2	1351.3	1383.6	1421.1	1463.2	1502.6
15°	1116.4	1136.8	1162.2	1187.0	1220.8	1256.4	1295.2	1337.8	1379.8	1426.9	1475.9
17.5°	1041.2	1063.7	1091.7	1120.4	1155.9	1197.6	1235.7	1282.3	1329.6	1384.4	1442.1
20°	992.4	1015.3	1048.4	1080.2	1112.7	1153.4	1198.5	1246.2	1296.5	1354.4	1418.6
22.5°	953.8	970.1	1002.6	1034.9	1073.0	1114.7	1158.9	1208.6	1263.4	1323.3	1390.6
25°	896.4	915.4	939.0	972.7	1012.1	1056.0	1100.5	1153.4	1213.1	1274.2	1346.1
27.5°	845.4	861.0	884.3	910.7	950.1	995.6	1042.9	1098.0	1159.3	1221.5	1297.1
30°	809.2	826.3	848.7	876.7	907.8	957.4	1005.8	1059.9	1122.2	1186.5	1264.0
32.5°	777.6	795.3	814.5	841.0	874.7	918.8	968.7	1021.7	1085.1	1151.3	1226.9
35°	733.5	745.6	763.4	789.5	822.6	858.2	909.1	965.1	1026.8	1095.5	1171.2
37.5°	682.9	698.5	716.1	738.9	767.9	806.4	853.8	910.3	967.6	1033.4	1102.5
40°	653.4	668.0	687.7	704.3	734.8	769.8	813.0	872.1	929.4	991.2	1054.1
42.5°	623.3	637.4	654.1	674.7	702.2	736.1	776.4	831.4	892.8	950.9	1003.7
45°	576.4	591.0	606.9	625.9	651.4	684.5	724.6	774.9	828.3	881.7	921.8
47.5°	531.4	545.2	560.2	579.8	603.2	635.2	671.0	715.4	767.3	812.8	841.4
50°	499.4	512.1	528.7	547.7	570.6	600.5	634.9	678.8	722.1	763.4	789.5
52.5°	467.9	482.1	498.6	515.2	537.1	566.9	598.8	636.5	677.8	711.5	733.0
55°	420.5	433.9	449.1	466.3	488.0	513.4	547.1	577.0	609.4	638.1	650.8
57.5°	374.8	386.5	400.9	418.7	438.2	461.8	488.6	517.4	540.3	560.4	574.9
60°	344.8	355.0	368.3	383.6	404.6	426.2	450.4	477.1	494.9	512.1	525.5
62.5°	314.2	324.0	336.8	350.5	369.0	389.1	412.3	433.9	451.2	462.8	478.2
65°	268.4	278.0	288.8	303.4	318.1	334.6	355.6	371.6	383.6	396.3	405.9
67.5°	225.8	233.8	244.0	255.5	267.9	283.7	300.0	313.2	321.5	329.1	340.6
70°	197.8	204.2	212.4	221.4	234.8	250.6	263.3	273.5	279.3	286.9	300.9
72.5°	169.4	176.7	184.5	193.4	204.2	217.5	228.8	238.9	242.6	248.7	257.7
75°	133.6	137.4	143.7	150.1	157.8	169.2	180.0	182.6	185.8	190.9	197.2
77.5°	101.0	104.4	107.0	111.2	117.3	126.5	132.2	136.0	136.8	138.6	145.0
80°	80.1	82.1	84.6	87.8	90.3	97.9	101.1	105.0	106.2	108.1	111.3
82.5°	58.8	60.7	62.2	64.8	69.0	72.0	75.2	79.0	79.3	80.7	81.3
85°	34.3	35.0	33.7	35.0	35.6	36.9	40.1	43.3	42.6	41.9	43.9
87.5°	15.5	15.3	14.4	15.6	14.4	14.6	14.2	14.4	15.1	15.8	16.5
90°	16.3	15.3	13.8	12.3	10.8	9.3	7.7	6.0	4.3	2.6	0.9
92.5°	16.3	15.3	13.9	12.6	11.3	10.0	9.9	11.1	12.3	13.5	14.7
95°	16.3	15.3	23.3	31.4	39.4	47.4	51.8	52.4	53.1	53.7	54.3
97.5°	40.9	46.9	62.9	78.8	94.7	110.7	118.0	116.9	115.7	114.6	113.5
100°	134.3	165.9	165.0	164.2	163.3	162.5	161.7	161.1	160.4	159.9	159.2
102.5°	205.7	211.6	211.1	210.6	210.1	209.6	209.0	208.1	207.4	206.5	205.8
105°	284.1	284.1	284.1	284.1	284.1	284.1	283.6	282.8	281.9	281.1	280.2
107.5°	359.6	359.6	359.1	358.7	358.3	357.9	357.7	357.7	357.7	357.7	357.7
110°	409.3	409.9	409.4	409.1	408.6	408.2	408.0	408.0	408.0	408.0	408.0



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	457.9	458.7	458.5	458.2	458.0	457.7	457.3	456.8	456.3	455.8	455.2
115°	531.0	531.9	531.7	531.5	531.3	531.0	530.5	529.3	528.3	527.3	526.2
117.5°	601.9	603.0	602.2	601.4	600.6	599.8	599.5	599.5	599.6	599.6	599.6
120°	646.9	647.2	646.6	646.0	645.4	644.7	644.5	644.7	644.9	645.2	645.4
122.5°	690.3	690.7	690.4	690.1	689.8	689.6	689.0	688.2	687.4	686.5	685.8
125°	754.1	755.0	755.0	755.0	755.0	755.0	754.2	752.7	751.3	749.8	748.3
127.5°	811.7	812.2	812.3	812.5	812.6	812.7	812.2	811.2	810.1	809.1	807.9
130°	849.7	850.3	850.1	849.9	849.7	849.4	848.9	847.7	846.7	845.6	844.6
132.5°	884.5	884.7	885.0	885.5	886.0	886.5	886.1	884.9	883.6	882.4	881.2
135°	936.6	937.1	937.5	937.9	938.3	938.8	938.3	937.1	935.8	934.5	933.2
137.5°	984.4	984.3	984.7	985.1	985.5	985.9	985.5	984.4	983.3	982.2	981.1
140°	1013.7	1013.3	1013.5	1013.7	1014.0	1014.2	1014.1	1013.6	1013.2	1012.8	1012.4
142.5°	1043.1	1043.0	1042.7	1042.5	1042.2	1041.9	1041.6	1041.3	1041.1	1040.8	1040.6
145°	1084.1	1083.8	1083.8	1083.8	1083.8	1083.8	1083.6	1083.3	1082.8	1082.4	1081.9
147.5°	1119.2	1118.9	1118.7	1118.4	1118.1	1117.9	1117.9	1117.9	1118.0	1118.1	1118.1
150°	1141.5	1141.0	1140.7	1140.2	1139.8	1139.3	1139.3	1139.8	1140.2	1140.7	1141.0
152.5°	1161.3	1160.8	1160.5	1160.1	1159.6	1159.2	1159.4	1160.4	1161.3	1162.2	1163.2
155°	1188.4	1187.8	1187.3	1186.9	1186.5	1186.1	1186.5	1187.8	1189.0	1190.3	1191.6
157.5°	1211.0	1210.2	1210.2	1210.1	1210.1	1210.1	1210.4	1211.3	1212.0	1212.8	1213.5
160°	1224.8	1224.0	1223.8	1223.6	1223.3	1223.1	1223.7	1224.9	1226.2	1227.5	1228.8
162.5°	1237.4	1236.1	1236.0	1235.8	1235.6	1235.3	1235.9	1237.2	1238.4	1239.7	1241.0
165°	1253.9	1252.5	1252.4	1252.2	1252.0	1251.7	1252.3	1253.6	1254.8	1256.1	1257.4
167.5°	1266.1	1264.6	1264.4	1264.1	1263.9	1263.8	1264.3	1265.6	1267.0	1268.3	1269.5
170°	1272.4	1270.7	1270.5	1270.3	1270.1	1269.9	1270.5	1272.0	1273.5	1275.0	1276.4
172.5°	1277.5	1276.0	1275.6	1275.3	1274.9	1274.5	1275.1	1276.6	1278.0	1279.5	1281.0
175°	1282.9	1281.2	1281.0	1280.7	1280.5	1280.3	1280.8	1282.1	1283.4	1284.7	1285.9
177.5°	1285.6	1284.4	1284.2	1284.1	1283.9	1283.7	1284.2	1285.2	1286.2	1287.2	1288.3
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1557.4	1561.9	1568.5	1576.1	1582.2	1588.8	1592.4	1592.4	1595.5	1602.1	1610.8
5°	1561.8	1578.3	1594.2	1614.6	1630.5	1648.9	1662.9	1676.3	1688.4	1703.6	1719.6
7.5°	1560.5	1588.0	1616.6	1648.7	1684.0	1712.1	1741.1	1763.7	1786.1	1815.3	1838.3
10°	1555.4	1591.0	1629.8	1670.6	1715.1	1753.9	1788.9	1820.7	1851.2	1883.0	1911.7
12.5°	1546.2	1591.6	1639.0	1687.9	1744.1	1788.5	1833.7	1867.6	1903.2	1938.0	1973.2
15°	1532.5	1585.9	1643.2	1711.3	1780.0	1829.6	1874.2	1918.1	1951.1	1990.6	2024.3
17.5°	1504.1	1573.0	1645.0	1719.4	1785.5	1843.0	1889.8	1931.6	1966.8	2010.2	2056.0
20°	1487.3	1561.8	1636.8	1716.4	1779.3	1838.5	1883.7	1926.9	1970.9	2027.4	2083.4
22.5°	1464.0	1543.4	1623.1	1698.6	1765.1	1822.2	1868.9	1921.8	1979.4	2043.7	2111.4
25°	1426.9	1509.0	1587.9	1659.7	1724.7	1783.2	1846.8	1918.1	1988.0	2072.7	2169.9
27.5°	1380.0	1459.1	1529.5	1605.4	1669.9	1744.4	1823.7	1901.0	2001.9	2118.3	2239.8
30°	1344.8	1419.9	1486.7	1558.6	1631.7	1713.8	1802.9	1893.9	2014.1	2150.9	2295.3
32.5°	1304.1	1372.1	1438.3	1507.7	1592.0	1682.2	1776.9	1888.3	2031.9	2187.5	2337.0
35°	1233.5	1294.6	1358.9	1435.8	1525.5	1623.5	1744.4	1879.9	2053.5	2220.8	2355.0
37.5°	1159.4	1207.7	1272.1	1353.4	1451.0	1564.4	1701.6	1866.2	2044.7	2194.7	2251.9
40°	1102.5	1147.6	1215.7	1301.0	1397.6	1521.7	1675.7	1844.8	2024.3	2128.6	2124.1
42.5°	1045.9	1091.7	1157.2	1242.9	1343.7	1482.5	1641.1	1816.8	1968.3	2008.0	1925.1
45°	959.3	1001.9	1066.2	1152.7	1260.8	1406.6	1573.2	1741.8	1838.5	1774.2	1610.1
47.5°	871.0	912.4	972.0	1056.8	1174.9	1327.3	1484.9	1623.2	1636.8	1498.8	1301.9
50°	813.0	851.8	908.4	998.8	1113.2	1262.2	1414.2	1523.0	1489.2	1320.7	1117.8
52.5°	756.5	793.8	846.9	932.1	1049.1	1195.0	1330.7	1416.1	1338.1	1158.9	976.3
55°	673.1	708.7	762.1	840.4	946.6	1080.2	1199.2	1230.3	1115.8	935.2	787.6
57.5°	593.8	619.9	672.7	741.9	844.3	962.1	1047.4	1041.8	915.4	752.7	646.9
60°	541.4	564.9	615.2	678.8	776.1	881.7	941.5	916.1	788.2	653.9	552.1
62.5°	492.5	514.5	556.7	615.2	698.8	790.6	834.2	799.0	678.3	560.3	479.4
65°	418.6	434.5	468.3	522.3	587.8	651.4	690.2	638.7	531.9	442.8	381.7
67.5°	349.5	363.3	393.2	432.1	477.2	521.1	537.0	488.6	405.5	345.4	302.5
70°	304.7	317.4	337.8	374.1	404.0	435.2	442.8	399.5	330.2	284.4	257.7
72.5°	261.9	273.7	291.5	317.1	337.8	355.7	359.3	319.1	266.1	234.5	213.9
75°	199.7	209.9	221.4	230.9	244.3	247.5	246.2	215.0	186.4	165.4	153.9
77.5°	146.8	151.0	158.1	161.8	162.5	162.2	155.7	136.0	121.2	112.6	107.9
80°	113.2	116.4	118.3	119.6	120.3	113.9	106.9	94.8	89.7	84.6	78.9
82.5°	82.2	84.4	86.2	86.5	83.0	77.8	71.3	65.2	61.7	59.2	57.0
85°	44.5	45.1	44.5	41.4	36.9	35.0	33.7	32.4	31.8	31.2	31.2
87.5°	16.3	15.1	12.9	13.8	14.0	13.9	14.1	13.9	13.8	13.9	14.1
90°	2.6	4.3	6.0	7.7	9.3	10.8	12.3	13.8	15.3	16.3	17.3
92.5°	13.5	12.3	11.1	9.9	10.0	11.3	12.6	13.9	15.3	16.3	17.3
95°	53.7	53.1	52.4	51.8	47.4	39.4	31.4	23.3	15.3	16.3	17.3
97.5°	114.6	115.7	116.9	118.0	110.7	94.7	78.8	62.9	46.9	40.9	35.0
100°	159.9	160.4	161.1	161.7	162.5	163.3	164.2	165.0	165.9	134.3	102.7
102.5°	206.5	207.4	208.1	209.0	209.6	210.1	210.6	211.1	211.6	205.7	199.6
105°	281.1	281.9	282.8	283.6	284.1	284.1	284.1	284.1	284.1	284.1	284.1
107.5°	357.7	357.7	357.7	357.7	357.9	358.3	358.7	359.1	359.6	359.6	359.7
110°	408.0	408.0	408.0	408.0	408.2	408.6	409.1	409.4	409.9	409.3	408.6





TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	455.8	456.3	456.8	457.3	457.7	458.0	458.2	458.5	458.7	457.9	457.1
115°	527.3	528.3	529.3	530.5	531.0	531.3	531.5	531.7	531.9	531.0	530.2
117.5°	599.6	599.6	599.5	599.5	599.8	600.6	601.4	602.2	603.0	601.9	600.9
120°	645.2	644.9	644.7	644.5	644.7	645.4	646.0	646.6	647.2	646.9	646.4
122.5°	686.5	687.4	688.2	689.0	689.6	689.8	690.1	690.4	690.7	690.3	689.8
125°	749.8	751.3	752.7	754.2	755.0	755.0	755.0	755.0	755.0	754.1	753.3
127.5°	809.1	810.1	811.2	812.2	812.7	812.6	812.5	812.3	812.2	811.7	811.2
130°	845.6	846.7	847.7	848.9	849.4	849.7	849.9	850.1	850.3	849.7	849.0
132.5°	882.4	883.6	884.9	886.1	886.5	886.0	885.5	885.0	884.7	884.5	884.4
135°	934.5	935.8	937.1	938.3	938.8	938.3	937.9	937.5	937.1	936.6	936.2
137.5°	982.2	983.3	984.4	985.5	985.9	985.5	985.1	984.7	984.3	984.4	984.5
140°	1012.8	1013.2	1013.6	1014.1	1014.2	1014.0	1013.7	1013.5	1013.3	1013.7	1014.2
142.5°	1040.8	1041.1	1041.3	1041.6	1041.9	1042.2	1042.5	1042.7	1043.0	1043.1	1043.2
145°	1082.4	1082.8	1083.3	1083.6	1083.8	1083.8	1083.8	1083.8	1083.8	1084.1	1084.3
147.5°	1118.1	1118.0	1117.9	1117.9	1117.9	1118.1	1118.4	1118.7	1118.9	1119.2	1119.5
150°	1140.7	1140.2	1139.8	1139.3	1139.3	1139.8	1140.2	1140.7	1141.0	1141.5	1141.9
152.5°	1162.2	1161.3	1160.4	1159.4	1159.2	1159.6	1160.1	1160.5	1160.8	1161.3	1161.7
155°	1190.3	1189.0	1187.8	1186.5	1186.1	1186.5	1186.9	1187.3	1187.8	1188.4	1189.0
157.5°	1212.8	1212.0	1211.3	1210.4	1210.1	1210.1	1210.1	1210.2	1210.2	1211.0	1211.6
160°	1227.5	1226.2	1224.9	1223.7	1223.1	1223.3	1223.6	1223.8	1224.0	1224.8	1225.7
162.5°	1239.7	1238.4	1237.2	1235.9	1235.3	1235.6	1235.8	1236.0	1236.1	1237.4	1238.6
165°	1256.1	1254.8	1253.6	1252.3	1251.7	1252.0	1252.2	1252.4	1252.5	1253.9	1255.1
167.5°	1268.3	1267.0	1265.6	1264.3	1263.8	1263.9	1264.1	1264.4	1264.6	1266.1	1267.6
170°	1275.0	1273.5	1272.0	1270.5	1269.9	1270.1	1270.3	1270.5	1270.7	1272.4	1274.1
172.5°	1279.5	1278.0	1276.6	1275.1	1274.5	1274.9	1275.3	1275.6	1276.0	1277.5	1279.1
175°	1284.7	1283.4	1282.1	1280.8	1280.3	1280.5	1280.7	1281.0	1281.2	1282.9	1284.6
177.5°	1287.2	1286.2	1285.2	1284.2	1283.7	1283.9	1284.1	1284.2	1284.4	1285.6	1286.8
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7	1549.7
2.5°	1617.4	1617.4	1626.1	1625.5	1631.2	1629.1	1630.1
5°	1738.6	1749.5	1759.0	1765.4	1774.9	1777.4	1776.1
7.5°	1864.3	1888.4	1900.1	1916.1	1919.0	1927.4	1926.6
10°	1942.2	1965.8	1983.6	1997.5	2004.5	2013.5	2014.1
12.5°	2003.3	2023.3	2039.0	2052.0	2060.5	2063.3	2065.0
15°	2051.0	2073.2	2091.7	2110.2	2121.0	2129.2	2133.7
17.5°	2099.0	2133.4	2166.0	2191.0	2206.1	2218.8	2218.7
20°	2136.3	2175.7	2216.4	2245.0	2274.3	2287.0	2288.9
22.5°	2176.0	2236.3	2288.7	2333.1	2371.4	2384.7	2389.7
25°	2258.3	2337.2	2418.1	2480.4	2524.9	2551.0	2554.9
27.5°	2358.0	2464.7	2549.8	2607.3	2644.3	2663.6	2667.8
30°	2428.3	2526.9	2603.2	2646.5	2663.6	2666.2	2656.7
32.5°	2459.8	2533.5	2564.0	2561.5	2527.7	2505.4	2496.8
35°	2421.2	2405.9	2331.6	2242.5	2174.4	2131.2	2119.7
37.5°	2203.4	2071.7	1934.9	1800.3	1728.6	1692.1	1629.6
40°	1988.7	1801.0	1658.5	1545.2	1464.4	1399.6	1384.3
42.5°	1746.4	1552.7	1410.1	1313.2	1248.7	1204.1	1184.8
45°	1403.4	1236.7	1119.0	1044.6	994.9	962.5	947.9
47.5°	1122.5	993.4	907.7	852.6	814.8	786.6	778.6
50°	968.3	865.2	792.7	746.2	717.6	696.0	687.0
52.5°	841.0	757.8	702.1	663.7	636.7	623.2	615.8
55°	694.1	622.2	582.1	551.6	536.3	525.5	520.4
57.5°	567.6	515.7	486.4	465.3	451.2	444.3	441.8
60°	496.8	456.1	429.4	412.8	403.3	394.5	391.9
62.5°	434.2	402.2	381.5	367.0	357.5	353.7	352.1
65°	349.9	328.9	313.6	304.7	297.1	295.8	295.2
67.5°	278.1	265.8	257.8	248.5	245.8	241.4	240.4
70°	237.9	229.7	220.1	217.0	213.8	209.3	209.9
72.5°	201.8	193.5	187.0	182.9	181.7	179.7	181.4
75°	147.6	145.1	142.5	139.3	138.1	138.1	137.4
77.5°	105.4	103.2	100.4	98.5	98.1	95.4	96.4
80°	76.3	73.1	71.9	72.5	70.6	69.9	69.9
82.5°	56.5	55.3	54.1	54.2	53.8	53.2	53.7
85°	31.2	30.5	30.5	29.9	29.9	29.2	29.2
87.5°	14.9	15.6	14.8	14.3	14.5	15.2	15.7
90°	18.5	19.5	20.4	21.0	21.6	22.2	22.9
92.5°	18.5	19.5	20.2	20.5	20.7	21.0	21.4
95°	18.5	19.5	20.0	20.0	20.0	20.0	20.0
97.5°	28.9	23.0	20.0	20.0	20.0	20.0	20.0
100°	71.2	39.6	23.4	22.5	21.7	20.8	20.0
102.5°	193.7	187.8	177.6	163.2	148.7	134.3	119.9
105°	284.1	284.1	284.0	283.8	283.5	283.3	283.1
107.5°	359.7	359.8	359.5	358.8	358.2	357.5	356.9
110°	408.0	407.4	407.2	407.4	407.6	407.7	408.0



TEST NUMBER: P333708-830

CATALOG NUMBER: S125RDIW-S1090D1050U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	456.3	455.5	455.0	454.7	454.3	454.0	453.7
115°	529.3	528.5	527.4	526.2	524.9	523.7	522.4
117.5°	599.7	598.6	597.8	597.3	596.7	596.2	595.6
120°	646.0	645.5	644.8	643.8	642.7	641.7	640.6
122.5°	689.5	689.0	688.2	687.0	685.8	684.6	683.3
125°	752.4	751.6	750.8	750.3	749.6	748.9	748.3
127.5°	810.8	810.3	809.3	807.8	806.2	804.6	803.0
130°	848.4	847.7	846.9	845.8	844.8	843.8	842.7
132.5°	884.2	884.1	883.5	882.5	881.4	880.3	879.3
135°	935.8	935.4	934.5	933.2	932.0	930.7	929.4
137.5°	984.6	984.7	984.2	983.1	981.9	980.9	979.8
140°	1014.6	1015.0	1014.6	1013.3	1012.0	1010.8	1009.5
142.5°	1043.3	1043.4	1042.8	1041.5	1040.3	1039.0	1037.7
145°	1084.5	1084.7	1084.2	1082.9	1081.7	1080.3	1079.1
147.5°	1119.7	1119.9	1119.4	1117.8	1116.3	1114.7	1113.2
150°	1142.4	1142.7	1142.1	1140.4	1138.7	1137.0	1135.3
152.5°	1162.2	1162.5	1162.1	1160.5	1159.0	1157.4	1155.9
155°	1189.7	1190.3	1189.8	1188.1	1186.4	1184.7	1183.0
157.5°	1212.3	1213.0	1212.5	1210.8	1209.1	1207.4	1205.7
160°	1226.5	1227.4	1226.9	1225.3	1223.6	1221.9	1220.2
162.5°	1239.7	1241.0	1240.6	1238.7	1236.9	1235.0	1233.1
165°	1256.4	1257.6	1257.4	1255.7	1254.1	1252.4	1250.7
167.5°	1269.1	1270.7	1270.5	1268.6	1266.7	1264.8	1262.9
170°	1275.8	1277.5	1277.3	1275.4	1273.6	1271.7	1269.7
172.5°	1280.6	1282.1	1282.0	1280.1	1278.1	1276.2	1274.3
175°	1286.3	1288.0	1287.9	1285.9	1284.0	1282.1	1280.3
177.5°	1288.0	1289.2	1289.1	1287.7	1286.4	1285.1	1283.6
180°	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9	1285.9

(END OF REPORT)