

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B10WFL559024D010 2LBDL\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14807)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQWM2B10WFL559024D010 2LBDL\*H  
Description: 1000 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 641.7 lumens  
Efficiency: N/A  
Efficacy: 62.3 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSSQWM2B10WFL559024D010 2LBDL\*H

### Luminous Intensity Polar Plot

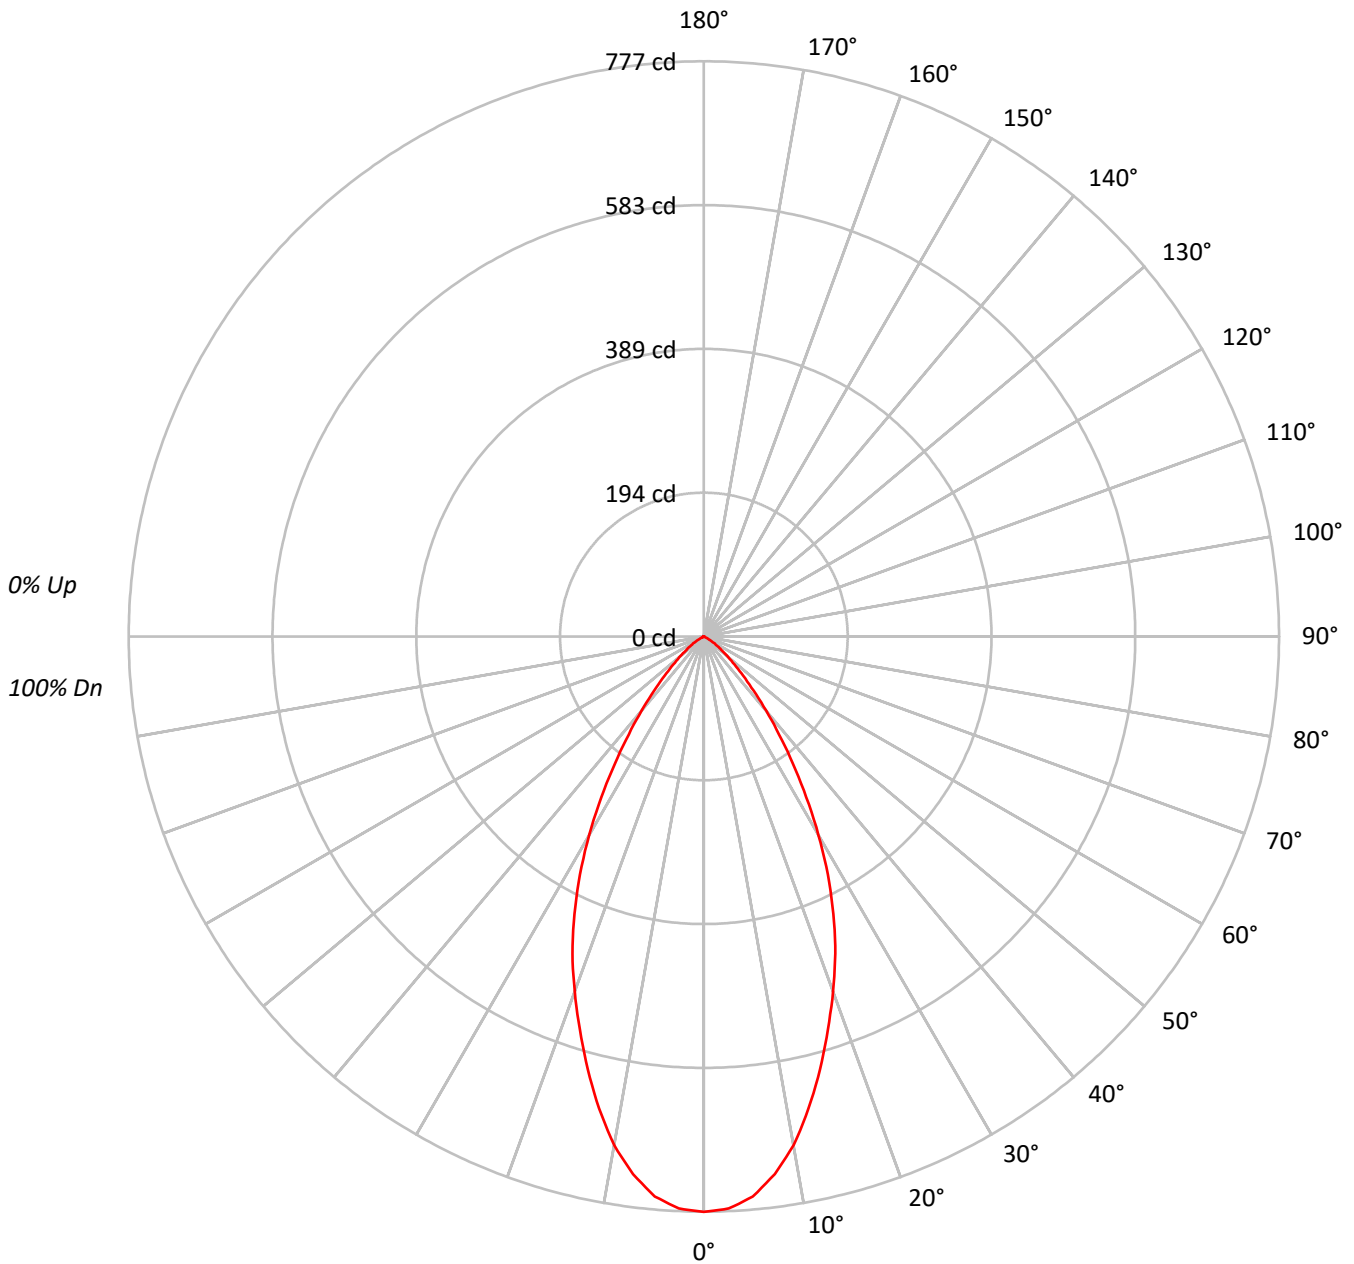



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559024D010 2LBDL\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80			
4	96	89	83	79	95	87	82	78	85	81	77	83	79	76	81	78	75	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	68			
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	59			
8	78	68	62	58	77	68	62	58	67	61	58	66	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	58	54	62	57	54	61	57	54	52			
10	71	61	55	51	70	60	55	51	60	54	51	59	54	51	58	54	50	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	301084
5°	295235
10°	274460
15°	242972
20°	210348
25°	176811
30°	138474
35°	98923
40°	66088
45°	40975
50°	24526
55°	14722
60°	6585
65°	825
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559024D010 2LBDL\*H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	70.5	11.0
10°-20°	168.8	26.3
20°-30°	188.2	29.3
30°-40°	131.8	20.5
40°-50°	60.2	9.4
50°-60°	20.1	3.1
60°-70°	2.2	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	427.4	66.6
0°-40°	559.3	87.2
0°-60°	639.6	99.7
0°-90°	641.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	641.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	777	
5°	759	70
15°	606	169
25°	414	188
35°	209	132
45°	75	60
55°	22	20
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559024D010 2LBDL\*H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	777.3
2.5°	773.5
5°	759.3
7.5°	732.8
10°	697.8
12.5°	653.3
15°	605.9
17.5°	556.7
20°	510.3
22.5°	463.9
25°	413.7
27.5°	362.6
30°	309.6
32.5°	257.5
35°	209.2
37.5°	166.6
40°	130.7
42.5°	99.4
45°	74.8
47.5°	55.9
50°	40.7
52.5°	29.3
55°	21.8
57.5°	15.1
60°	8.5
62.5°	2.8
65°	0.9
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)