

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B10WFL558050D010 2LBDL*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14806)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10WFL558050D010 2LBDL*GPH
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH GRAPHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 913.8 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LSSQWM2B10WFL558050D010 2LBDL*GPH

Luminous Intensity Polar Plot

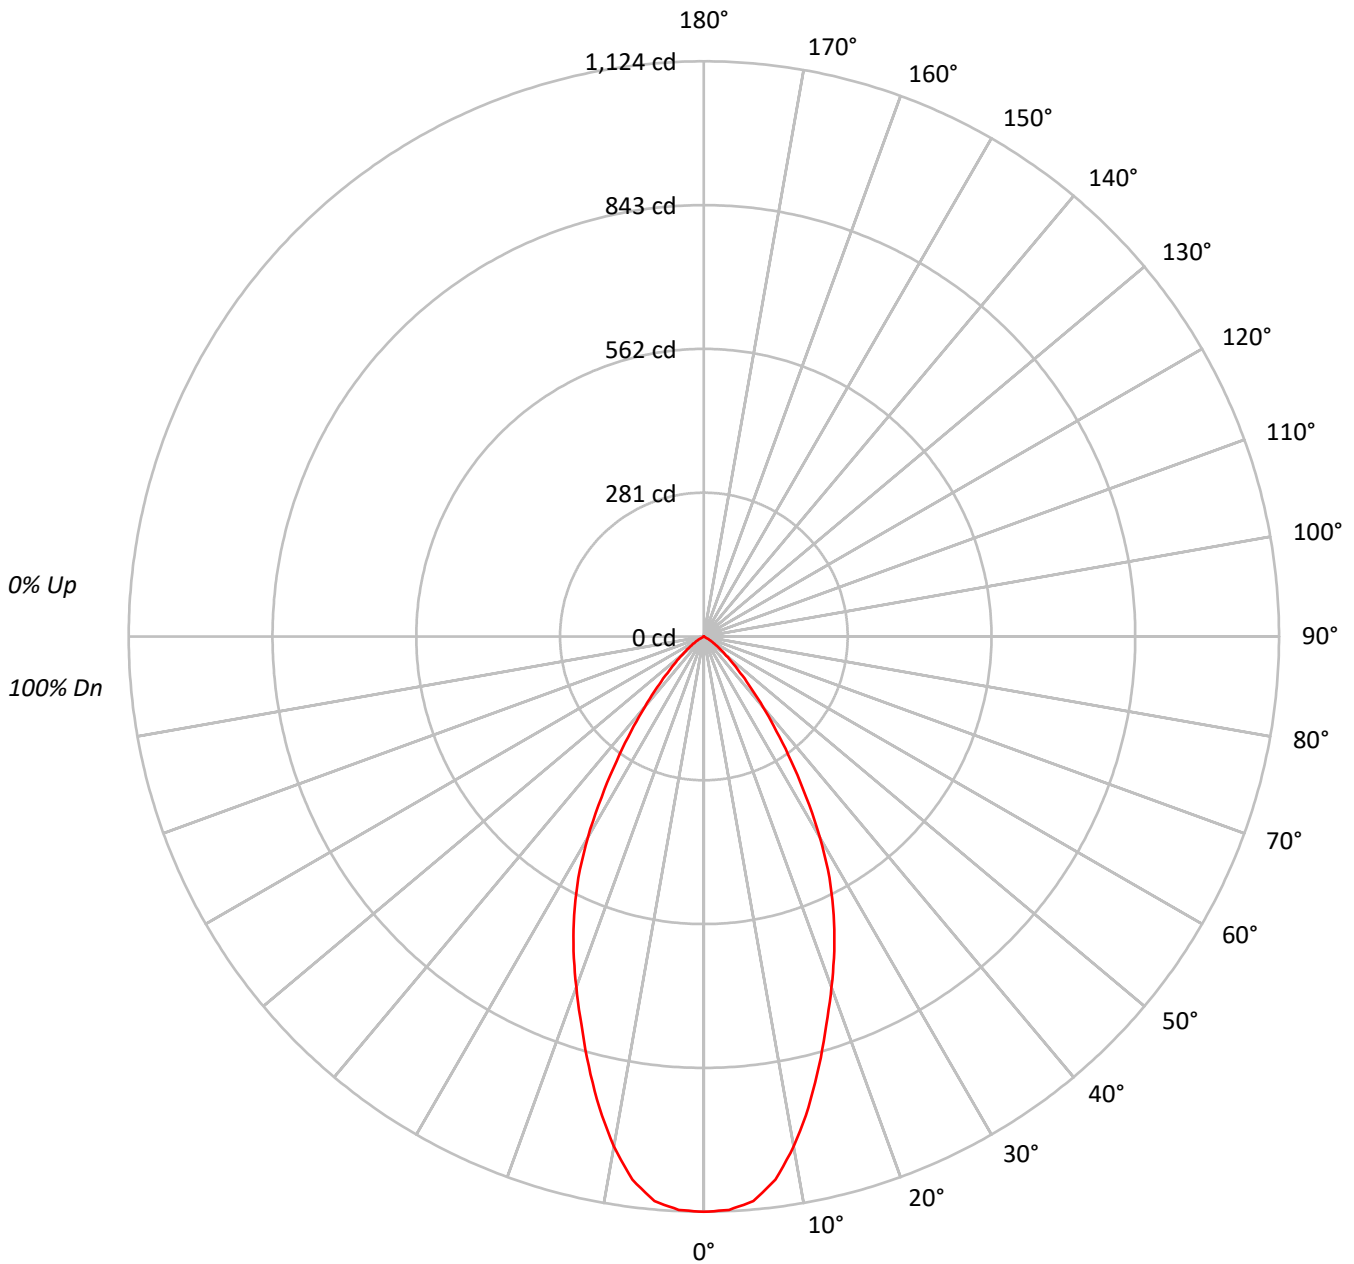



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558050D010 2LBDL*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69			
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64			
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	74	64	59	55	63	58	54	62	58	54	62	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	435454
5°	430663
10°	398041
15°	348598
20°	300539
25°	256562
30°	202926
35°	140440
40°	90864
45°	55162
50°	32239
55°	18098
60°	6895
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558050D010 2LBDL*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.6	11.2
10°-20°	242.3	26.5
20°-30°	272.7	29.8
30°-40°	188.1	20.6
40°-50°	81.2	8.9
50°-60°	25.2	2.8
60°-70°	1.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	617.7	67.6
0°-40°	805.8	88.2
0°-60°	912.2	99.8
0°-90°	913.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	913.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1124	
5°	1108	103
15°	869	242
25°	600	273
35°	297	188
45°	101	81
55°	27	25
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558050D010 2LBDL*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1124.2
2.5°	1121.6
5°	1107.6
7.5°	1070.6
10°	1012.0
12.5°	943.2
15°	869.3
17.5°	795.3
20°	729.1
22.5°	665.3
25°	600.3
27.5°	531.5
30°	453.7
32.5°	372.2
35°	297.0
37.5°	233.2
40°	179.7
42.5°	135.1
45°	100.7
47.5°	73.9
50°	53.5
52.5°	38.2
55°	26.8
57.5°	17.8
60°	8.9
62.5°	2.5
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)