

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225462

Luminaire Tested: **LSSQ2B15FL409030D010 2LBDLC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225462
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14833)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQ2B15FL409030D010 2LBDLC*MB
Description: 1500 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1016.4 lumens
Efficiency: N/A
Efficacy: 71.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225462

CATALOG NUMBER: LSSQ2B15FL409030D010 2LBDLC*MB

Luminous Intensity Polar Plot

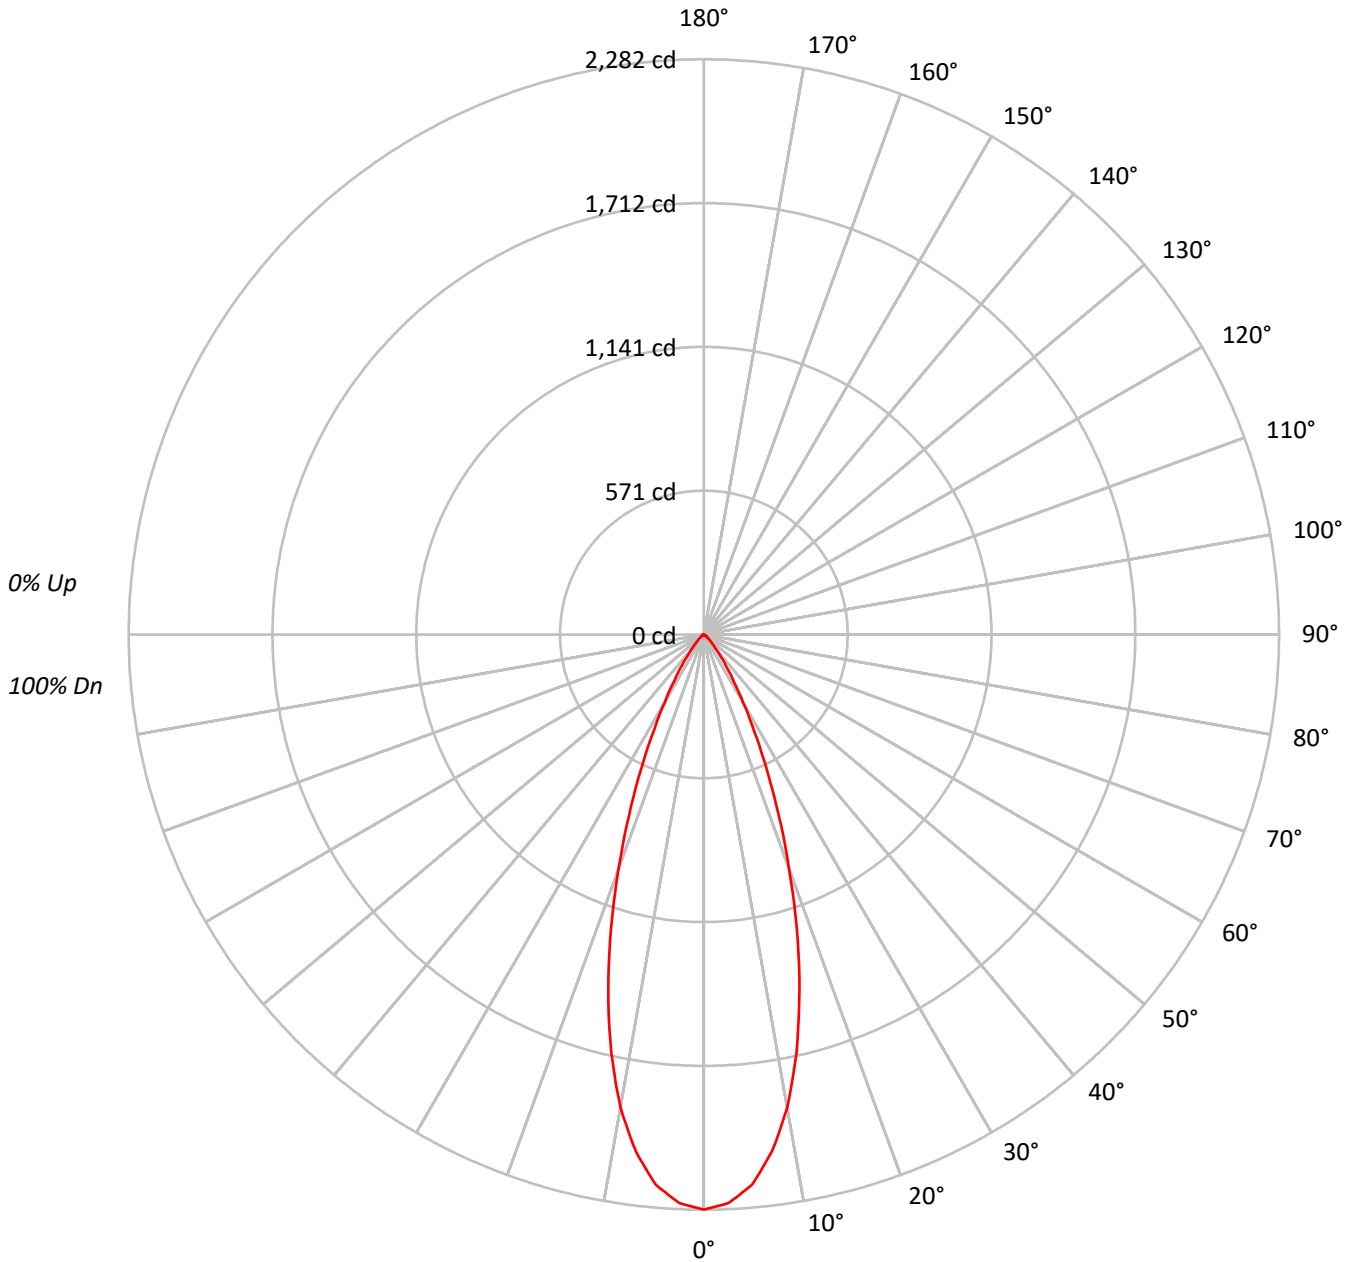



TEST NUMBER: P225462

CATALOG NUMBER: LSSQ2B15FL409030D010 2LBDLC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																										
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95																																				
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90																																				
3	105	100	95	92	103	98	94	91	96	92	90	93	91	88	91	89	87	86																																				
4	101	94	90	86	99	93	89	86	91	87	85	89	86	84	88	85	83	81																																				
5	97	90	85	81	95	89	84	81	87	83	80	85	82	79	84	81	79	77																																				
6	93	85	80	77	92	85	80	76	83	79	76	82	78	75	81	77	75	74																																				
7	89	81	76	73	88	81	76	73	80	75	72	79	75	72	78	74	72	70																																				
8	86	78	73	69	85	77	73	69	76	72	69	75	72	69	75	71	68	67																																				
9	83	75	70	66	82	74	69	66	73	69	66	72	69	66	72	68	65	64																																				
10	80	72	67	63	79	71	66	63	70	66	63	70	66	63	69	65	63	62																																				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	883807
5°	852150
10°	749474
15°	587440
20°	406888
25°	250664
30°	139503
35°	74429
40°	36912
45°	18789
50°	10365
55°	6753
60°	3331
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225462

CATALOG NUMBER: LSSQ2B15FL409030D010 2LBDLC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	199.9	19.7
10°-20°	400.1	39.4
20°-30°	273.4	26.9
30°-40°	104.2	10.3
40°-50°	28.9	2.8
50°-60°	9.1	0.9
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	873.4	85.9
0°-40°	977.6	96.2
0°-60°	1015.6	99.9
0°-90°	1016.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1016.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2282	
5°	2192	200
15°	1465	400
25°	586	273
35°	157	104
45°	34	29
55°	10	9
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225462

CATALOG NUMBER: LSSQ2B15FL409030D010 2LBDLC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	2281.7
2.5°	2257.4
5°	2191.6
7.5°	2068.6
10°	1905.5
12.5°	1698.1
15°	1464.9
17.5°	1226.0
20°	987.1
22.5°	775.4
25°	586.5
27.5°	430.6
30°	311.9
32.5°	221.7
35°	157.4
37.5°	110.2
40°	73.0
42.5°	48.6
45°	34.3
47.5°	24.3
50°	17.2
52.5°	12.9
55°	10.0
57.5°	7.2
60°	4.3
62.5°	1.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)