

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B15WFL558040D010 2LBDC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14811)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B15WFL558040D010 2LBDC*MMS
Description: 1500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1363.0 lumens
Efficiency: N/A
Efficacy: 95.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL558040D010 2LBDC*MMS

Luminous Intensity Polar Plot

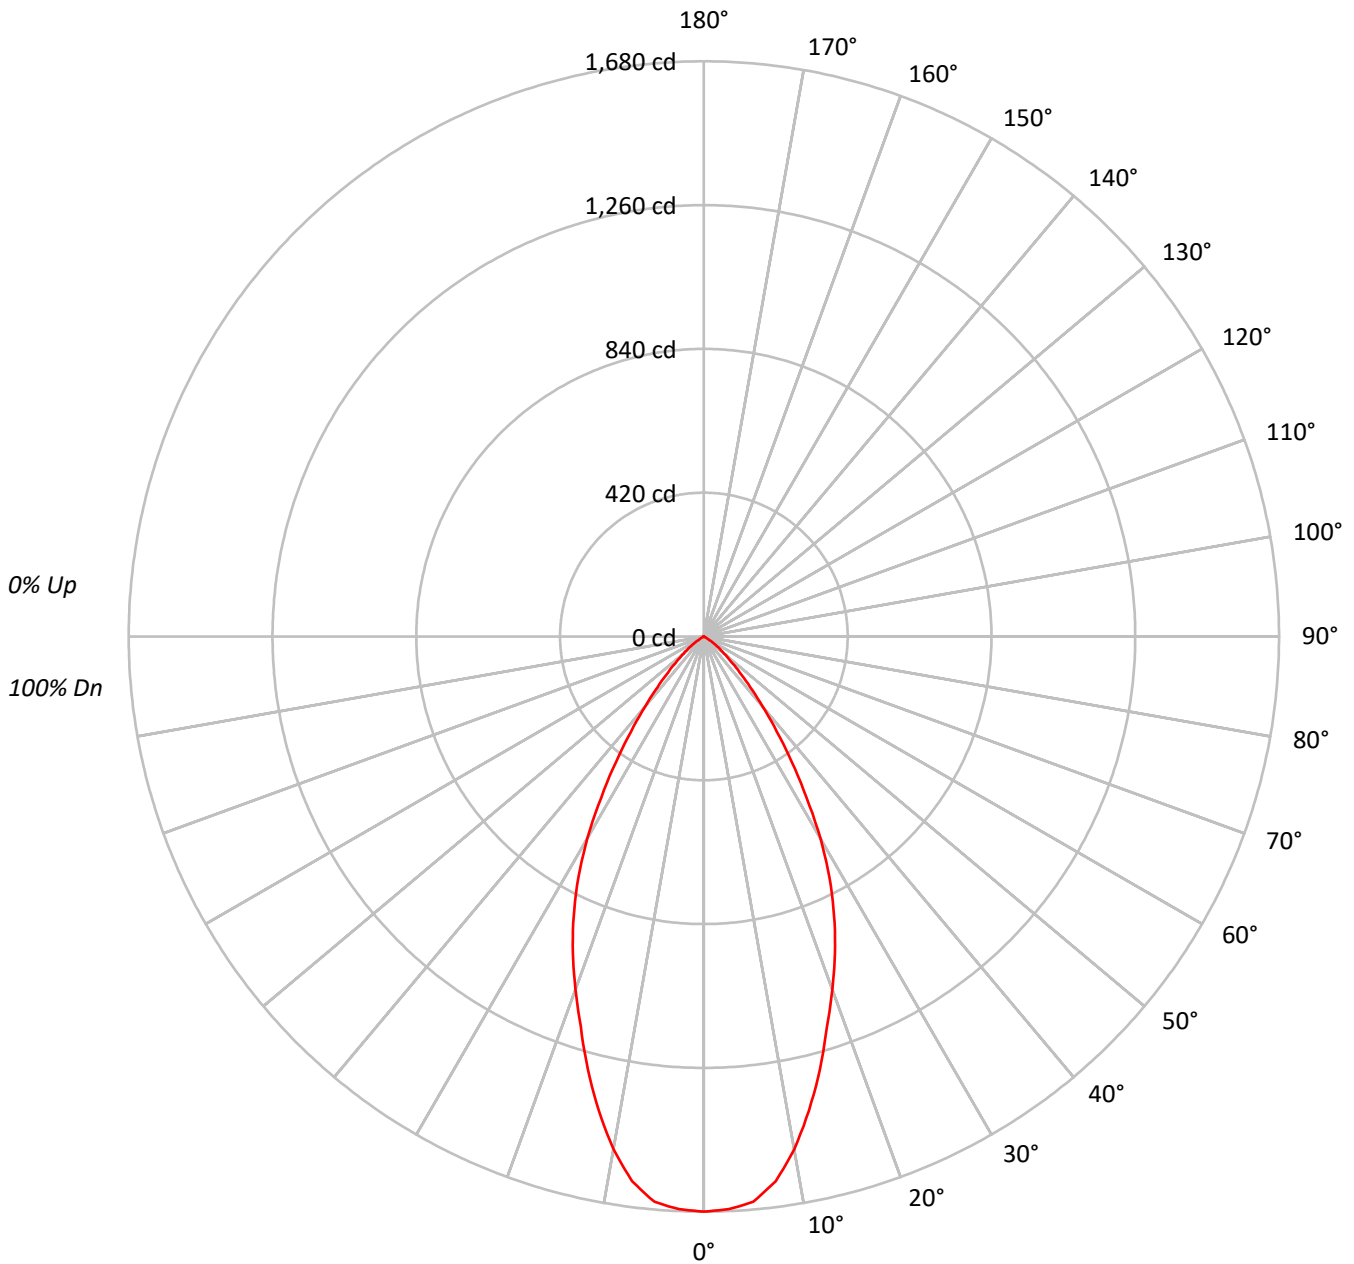



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL558040D010 2LBDC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	84	89	86	83	87	84	82	80
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69
6	87	78	72	68	86	77	72	67	76	71	67	74	70	66	73	69	66	65
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53
10	71	62	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	650703
5°	644478
10°	598203
15°	525123
20°	451900
25°	384565
30°	304545
35°	211417
40°	134299
45°	80963
50°	46220
55°	25257
60°	2866
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL558040D010 2LBDC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.8	11.3
10°-20°	364.5	26.7
20°-30°	409.2	30.0
30°-40°	281.9	20.7
40°-50°	119.2	8.7
50°-60°	33.5	2.5
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	927.4	68.0
0°-40°	1209.4	88.7
0°-60°	1362.1	99.9
0°-90°	1363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1363.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1680	
5°	1658	154
15°	1310	364
25°	900	409
35°	447	282
45°	148	119
55°	37	34
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL558040D010 2LBDC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1679.9
2.5°	1674.3
5°	1657.5
7.5°	1605.1
10°	1520.9
12.5°	1418.0
15°	1309.5
17.5°	1195.4
20°	1096.3
22.5°	1000.8
25°	899.8
27.5°	795.1
30°	680.9
32.5°	557.5
35°	447.1
37.5°	349.8
40°	265.6
42.5°	200.2
45°	147.8
47.5°	106.6
50°	76.7
52.5°	56.1
55°	37.4
57.5°	18.7
60°	3.7
62.5°	1.9
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)