

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2B20WFL559727D010 2LBDL*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14806)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2B20WFL559727D010 2LBDL*GPH
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH GRAPHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1104.7 lumens
Efficiency: N/A
Efficacy: 52.9 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LSR2B20WFL559727D010 2LBDL*GPH

Luminous Intensity Polar Plot

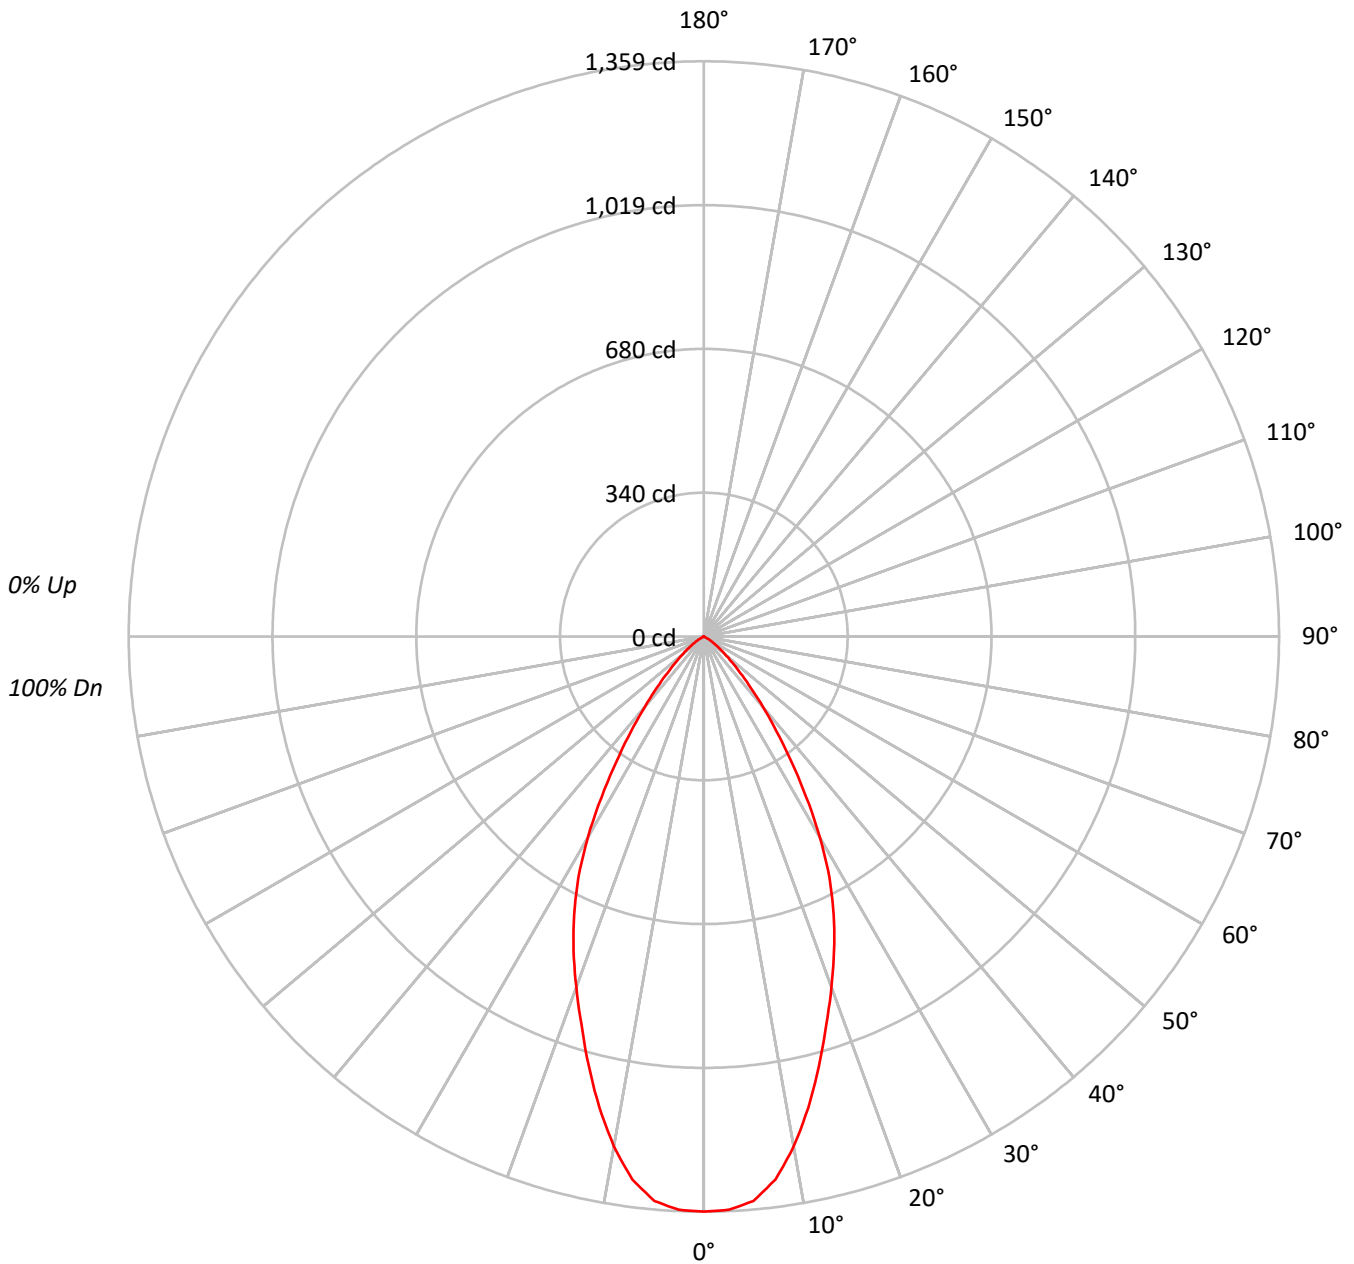



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559727D010 2LBDL*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86		
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	78	76	74		
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69		
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64		
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60		
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56		
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53		
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	526364
5°	520560
10°	481150
15°	421341
20°	363276
25°	310156
30°	245327
35°	169758
40°	109826
45°	66666
50°	38988
55°	21880
60°	8367
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559727D010 2LBDL*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.1	11.2
10°-20°	292.9	26.5
20°-30°	329.7	29.8
30°-40°	227.4	20.6
40°-50°	98.2	8.9
50°-60°	30.5	2.8
60°-70°	2.1	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	746.6	67.6
0°-40°	974.0	88.2
0°-60°	1102.7	99.8
0°-90°	1104.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1104.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1359	
5°	1339	124
15°	1051	293
25°	726	330
35°	359	227
45°	122	98
55°	32	30
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559727D010 2LBDL*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1358.9
2.5°	1355.8
5°	1338.8
7.5°	1294.2
10°	1223.3
12.5°	1140.1
15°	1050.7
17.5°	961.4
20°	881.3
22.5°	804.2
25°	725.7
27.5°	642.5
30°	548.5
32.5°	449.9
35°	359.0
37.5°	281.9
40°	217.2
42.5°	163.3
45°	121.7
47.5°	89.4
50°	64.7
52.5°	46.2
55°	32.4
57.5°	21.6
60°	10.8
62.5°	3.1
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)