

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B05WFL559030D010 2LBD\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29157)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQWM2B05WFL559030D010 2LBD\*H  
Description: 500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 585.0 lumens  
Efficiency: N/A  
Efficacy: 80.1 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSSQWM2B05WFL559030D010 2LBD\*H

### Luminous Intensity Polar Plot

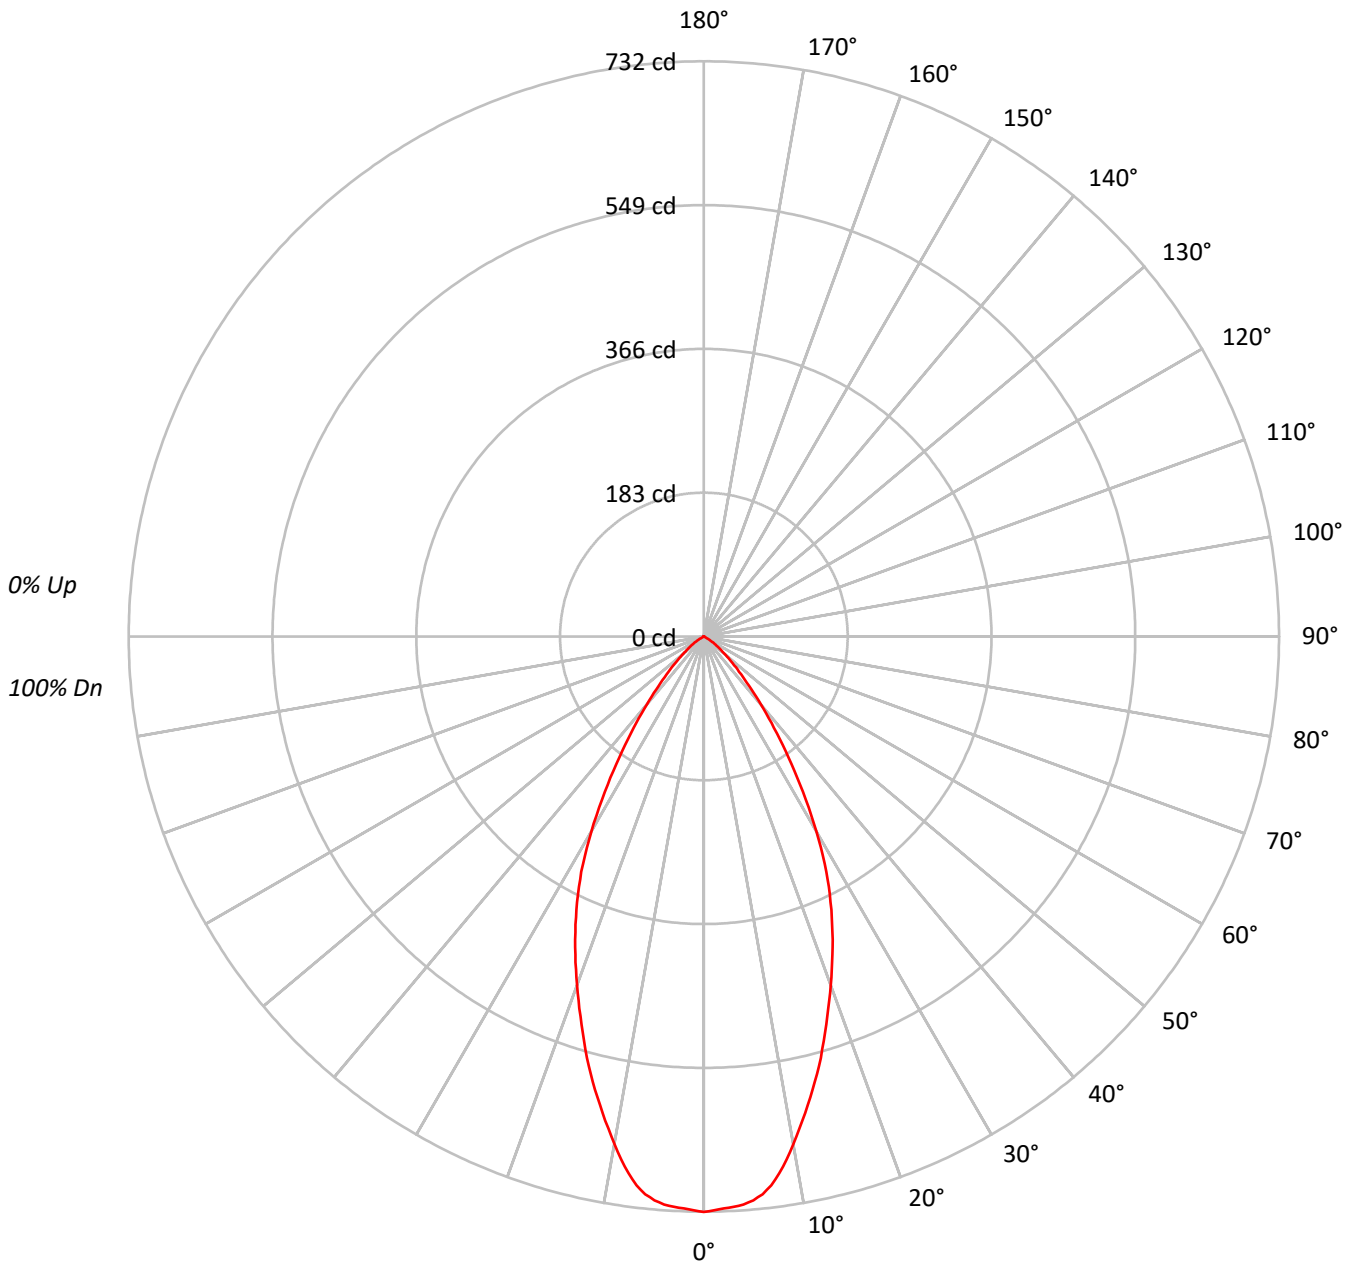



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559030D010 2LBD\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	91	86	100	94	90	86	92	88	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69
6	87	78	72	68	86	77	71	67	76	71	67	74	70	66	73	69	66	64
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53
10	71	62	56	52	70	61	55	52	60	55	52	59	55	51	59	54	51	50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	283692
5°	280110
10°	257940
15°	227052
20°	194437
25°	164032
30°	128098
35°	88473
40°	56834
45°	34730
50°	20549
55°	11683
60°	3719
65°	550
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559030D010 2LBD\*H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.7	11.4
10°-20°	157.3	26.9
20°-30°	174.4	29.8
30°-40°	118.4	20.2
40°-50°	51.1	8.7
50°-60°	16.1	2.7
60°-70°	1.0	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	398.5	68.1
0°-40°	516.9	88.3
0°-60°	584.0	99.8
0°-90°	585.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	585.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	732	
5°	720	67
15°	566	157
25°	384	174
35°	187	118
45°	63	51
55°	17	16
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559030D010 2LBD\*H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	732.4
1°	730.6
2°	728.2
3°	727.0
4°	724.6
5°	720.4
6°	713.8
7°	703.7
8°	689.9
9°	673.8
10°	655.8
11°	637.9
12°	620.0
13°	602.0
14°	584.1
15°	566.2
17.5°	517.7
20°	471.7
22.5°	428.1
25°	383.8
27.5°	337.8
30°	286.4
32.5°	234.4
35°	187.1
37.5°	146.5
40°	112.4
42.5°	84.9
45°	63.4
47.5°	46.6
50°	34.1
52.5°	24.5
55°	17.3
57.5°	11.4
60°	4.8
62.5°	1.2
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559030D010 2LBD\*H

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)