

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B05WFL559730D010 2LBD*WH**

Issue Date: 3/3/2020


Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14804)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B05WFL559730D010 2LBD*WH
Description: 500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH WHEAT HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 533.0 lumens
Efficiency: N/A
Efficacy: 73.0 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.81
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

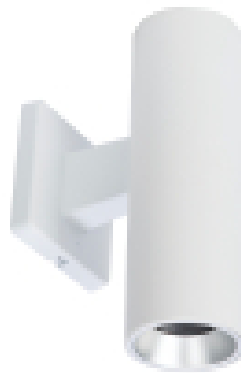

TEST NUMBER: P#
CATALOG NUMBER: LSSQWM2B05WFL559730D010 2LBD*WH

Luminous Intensity Polar Plot

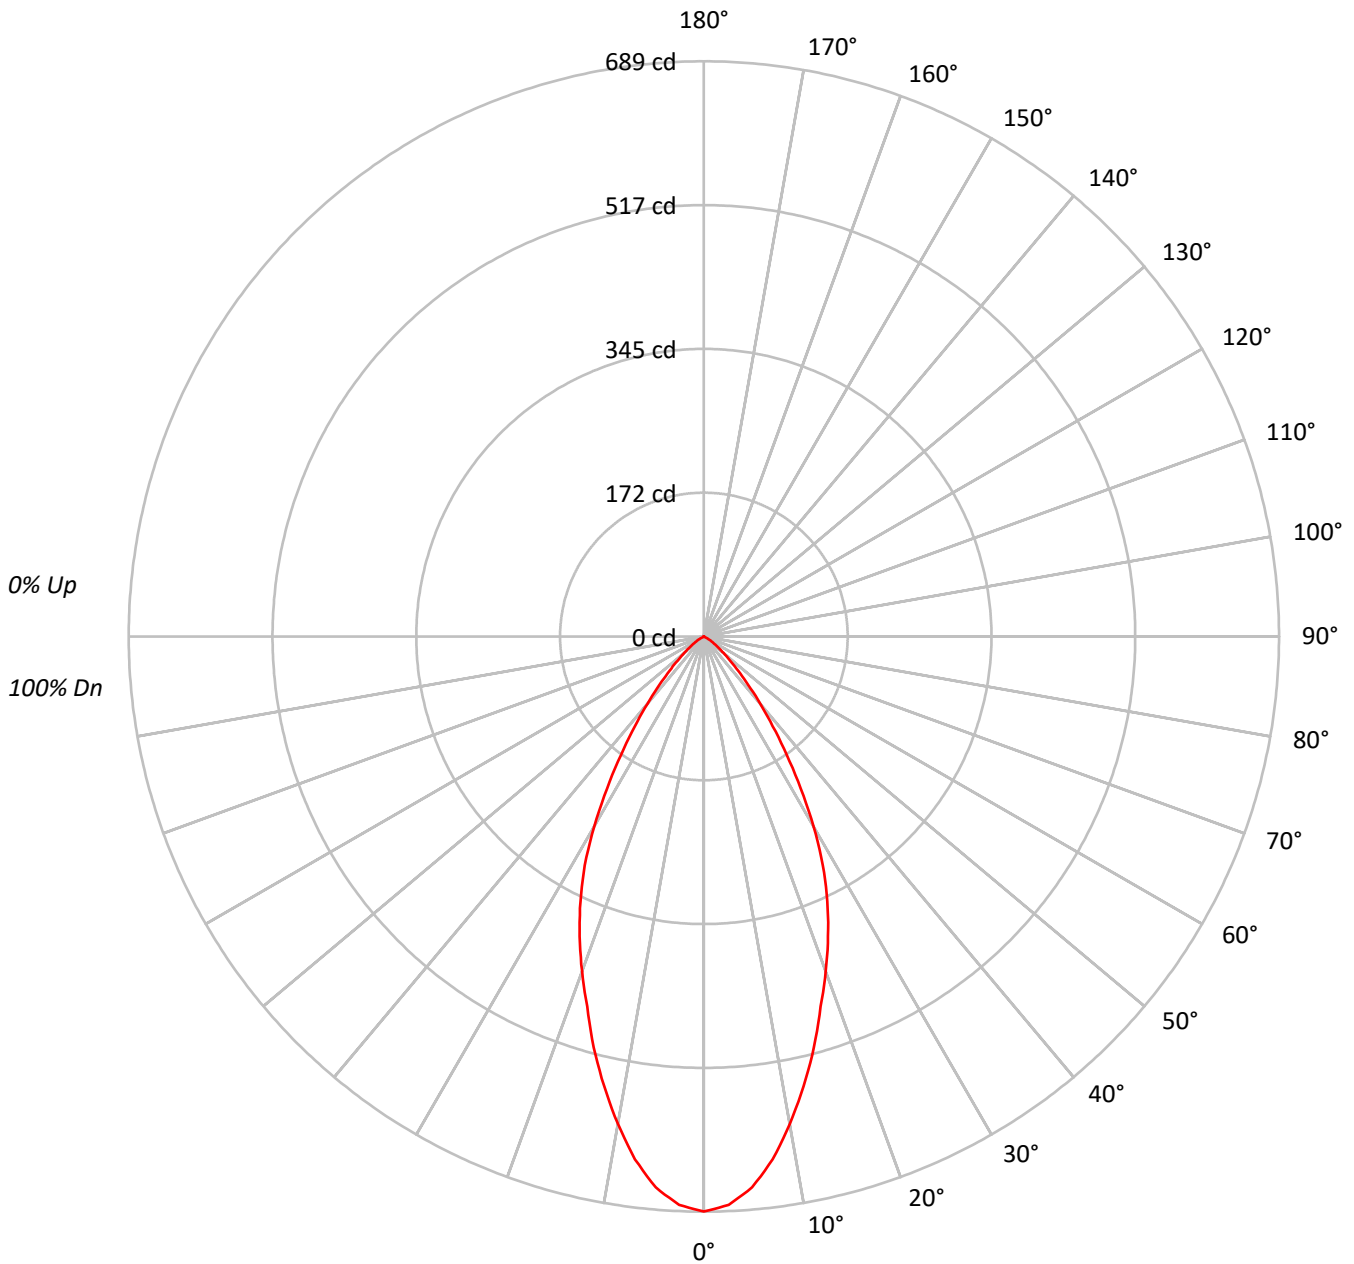



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559730D010 2LBD*WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	86	100	94	90	86	92	88	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69			
6	87	78	72	68	86	77	71	67	76	71	67	74	70	66	73	69	66	64			
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	74	64	59	55	64	58	55	63	58	54	62	57	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	266804
5°	257597
10°	233200
15°	204315
20°	175929
25°	149543
30°	117542
35°	81711
40°	52941
45°	31662
50°	18500
55°	10400
60°	3951
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559730D010 2LBD*WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.0	11.4
10°-20°	141.8	26.6
20°-30°	158.9	29.8
30°-40°	109.2	20.5
40°-50°	46.9	8.8
50°-60°	14.3	2.7
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	361.8	67.9
0°-40°	471.0	88.4
0°-60°	532.2	99.9
0°-90°	533.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	533.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	689	
5°	662	61
15°	510	142
25°	350	159
35°	173	109
45°	58	47
55°	15	14
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559730D010 2LBD*WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	688.8
2.5°	681.5
5°	662.5
7.5°	631.7
10°	592.9
12.5°	551.9
15°	509.5
17.5°	464.8
20°	426.8
22.5°	388.7
25°	349.9
27.5°	308.9
30°	262.8
32.5°	215.9
35°	172.8
37.5°	135.4
40°	104.7
42.5°	78.3
45°	57.8
47.5°	42.5
50°	30.7
52.5°	21.2
55°	15.4
57.5°	10.2
60°	5.1
62.5°	0.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)