

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSRWM2B05WFL558050D010 2LBDL*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B05WFL558050D010 2LBDL*MW
Description: 500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 706.0 lumens
Efficiency: N/A
Efficacy: 96.7 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LSRWM2B05WFL558050D010 2LBDL*MW

Luminous Intensity Polar Plot

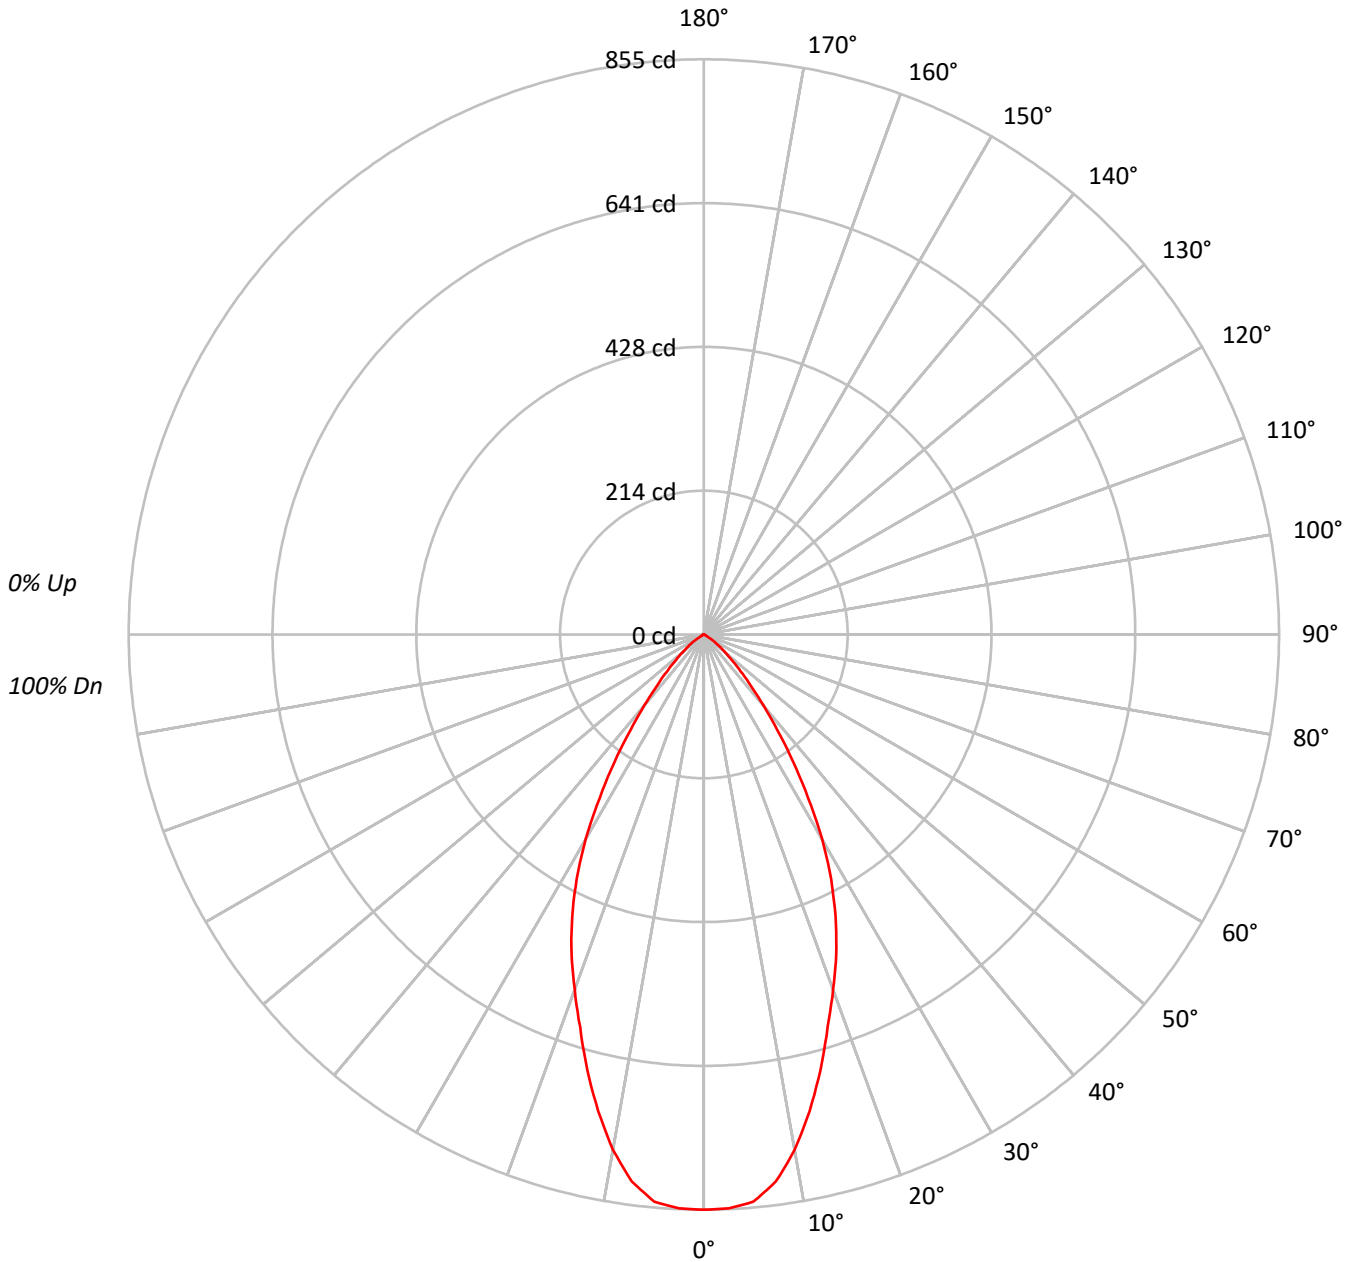



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL558050D010 2LBDL*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	331181
5°	329063
10°	305925
15°	268556
20°	231494
25°	197967
30°	157125
35°	109515
40°	69273
45°	42289
50°	25008
55°	13709
60°	3021
65°	2658
70°	2152
75°	2844
80°	2231
85°	4444



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL558050D010 2LBDL*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.5	11.1
10°-20°	186.5	26.4
20°-30°	210.4	29.8
30°-40°	145.6	20.6
40°-50°	62.1	8.8
50°-60°	18.0	2.5
60°-70°	2.6	0.4
70°-80°	1.6	0.2
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	475.5	67.3
0°-40°	621.1	88.0
0°-60°	701.1	99.3
0°-90°	706.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	706.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	855	
5°	846	79
15°	670	187
25°	463	210
35°	232	146
45°	77	62
55°	20	18
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL558050D010 2LBDL*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	855.0
2.5°	854.0
5°	846.3
7.5°	820.2
10°	777.8
12.5°	725.7
15°	669.7
17.5°	611.8
20°	561.6
22.5°	514.3
25°	463.2
27.5°	409.2
30°	351.3
32.5°	288.5
35°	231.6
37.5°	179.5
40°	137.0
42.5°	103.3
45°	77.2
47.5°	56.0
50°	41.5
52.5°	29.9
55°	20.3
57.5°	8.7
60°	3.9
62.5°	2.9
65°	2.9
67.5°	1.9
70°	1.9
72.5°	1.9
75°	1.9
77.5°	1.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)