

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL558027 2LBDL*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14806)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20WFL558027 2LBDL*GPH
Description: 2000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH GRAPHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1557.7 lumens
Efficiency: N/A
Efficacy: 74.5 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDL*GPH

Luminous Intensity Polar Plot

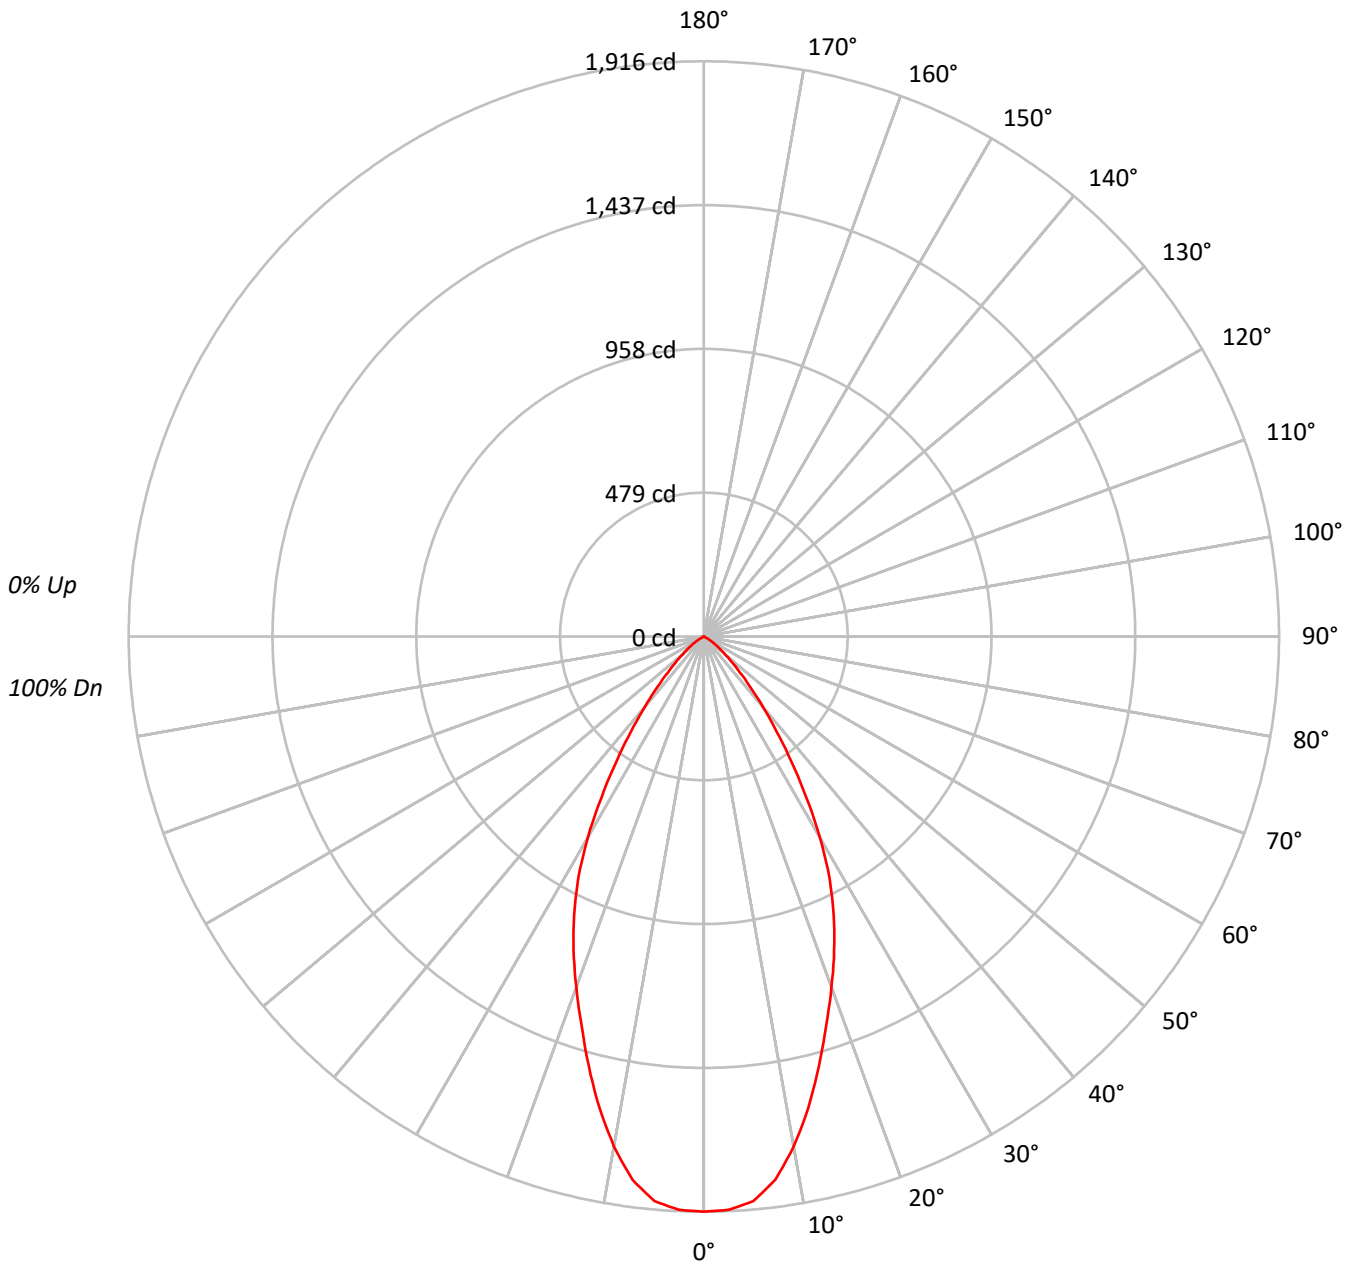



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDL*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93				93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86				86
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80				80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74				74
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69				69
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64				64
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60				60
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56				56
9	75	65	59	55	74	64	59	55	63	58	54	62	58	54	62	57	54	53				53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50				50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	742194
5°	734064
10°	678440
15°	594137
20°	512206
25°	437304
30°	345918
35°	239363
40°	154879
45°	94001
50°	54957
55°	30794
60°	11775
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDL*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.9	11.2
10°-20°	413.1	26.5
20°-30°	464.8	29.8
30°-40°	320.6	20.6
40°-50°	138.4	8.9
50°-60°	43.0	2.8
60°-70°	2.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1052.8	67.6
0°-40°	1373.4	88.2
0°-60°	1554.8	99.8
0°-90°	1557.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1557.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1916	
5°	1888	175
15°	1482	413
25°	1023	465
35°	506	321
45°	172	138
55°	46	43
65°	0	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558027 2LBDL*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1916.1
2.5°	1911.8
5°	1887.9
7.5°	1824.9
10°	1724.9
12.5°	1607.6
15°	1481.6
17.5°	1355.6
20°	1242.6
22.5°	1134.0
25°	1023.2
27.5°	905.9
30°	773.4
32.5°	634.4
35°	506.2
37.5°	397.6
40°	306.3
42.5°	230.3
45°	171.6
47.5°	126.0
50°	91.2
52.5°	65.2
55°	45.6
57.5°	30.4
60°	15.2
62.5°	4.3
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)