

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B20D010 EU2B20WFL558040 2LBDLC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14811)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B20D010 EU2B20WFL558040 2LBDLC\*MMS  
Description: 2000 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1664.3 lumens  
Efficiency: N/A  
Efficacy: 79.6 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558040 2LBDLC\*MMS

### Luminous Intensity Polar Plot

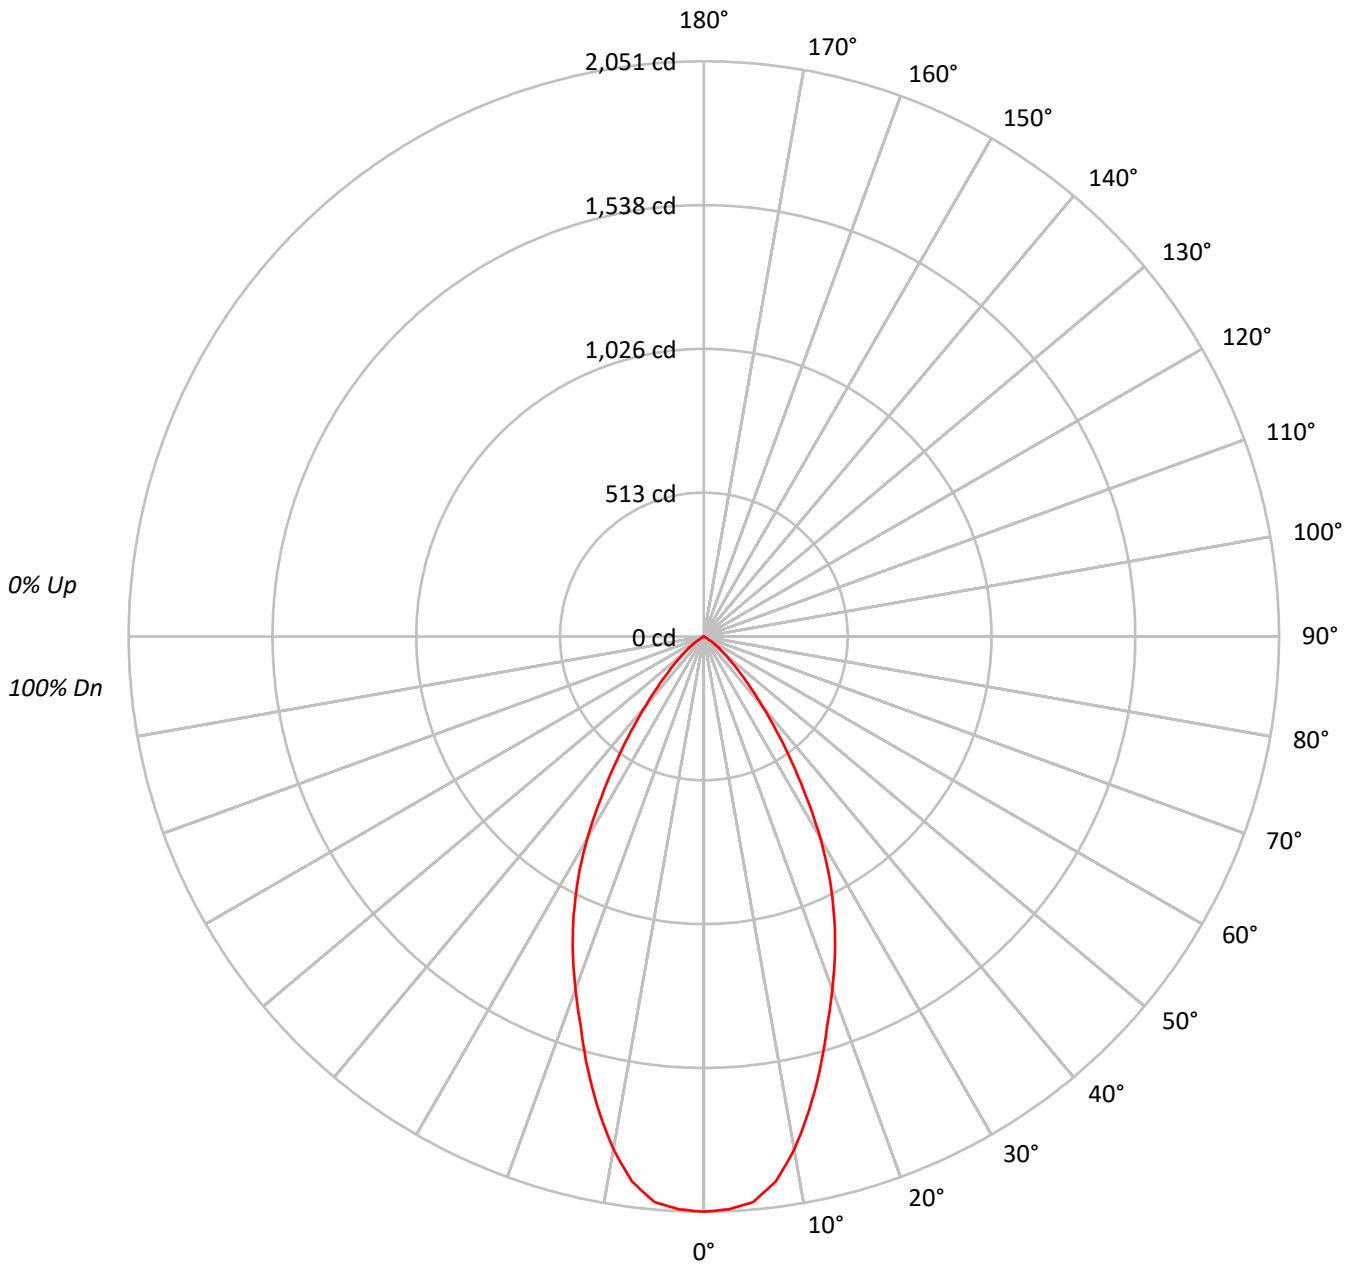



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558040 2LBDLC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	84	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74		
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69		
6	87	78	72	68	86	77	72	67	76	71	67	74	70	66	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	62	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	794563
5°	786944
10°	730437
15°	641215
20°	551778
25°	469572
30°	371904
35°	258135
40°	164031
45°	98876
50°	56464
55°	30862
60°	3564
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558040 2LBDLC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	187.8	11.3
10°-20°	445.1	26.7
20°-30°	499.6	30.0
30°-40°	344.3	20.7
40°-50°	145.5	8.7
50°-60°	41.0	2.5
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1132.4	68.0
0°-40°	1476.7	88.7
0°-60°	1663.2	99.9
0°-90°	1664.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1664.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2051	
5°	2024	188
15°	1599	445
25°	1099	500
35°	546	344
45°	180	146
55°	46	41
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B20D010 EU2B20WFL558040 2LBDLC\*MMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2051.3
2.5°	2044.4
5°	2023.9
7.5°	1959.9
10°	1857.1
12.5°	1731.5
15°	1599.0
17.5°	1459.6
20°	1338.6
22.5°	1222.1
25°	1098.7
27.5°	970.8
30°	831.5
32.5°	680.7
35°	545.9
37.5°	427.2
40°	324.4
42.5°	244.4
45°	180.5
47.5°	130.2
50°	93.7
52.5°	68.5
55°	45.7
57.5°	22.8
60°	4.6
62.5°	2.3
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)