

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280492

Luminaire Tested: **LDA2B109050D010 EU2B10WFL559050 2LBALD1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P280492
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B109050D010 EU2B10WFL559050 2LBALD1MW
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in ADJ spun Refl w/lens Self-Flanged, MW
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1006.2 lumens
Efficiency: N/A
Efficacy: 100.6 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P280492

CATALOG NUMBER: LDA2B109050D010 EU2B10WFL559050 2LBALD1MW

Luminous Intensity Polar Plot

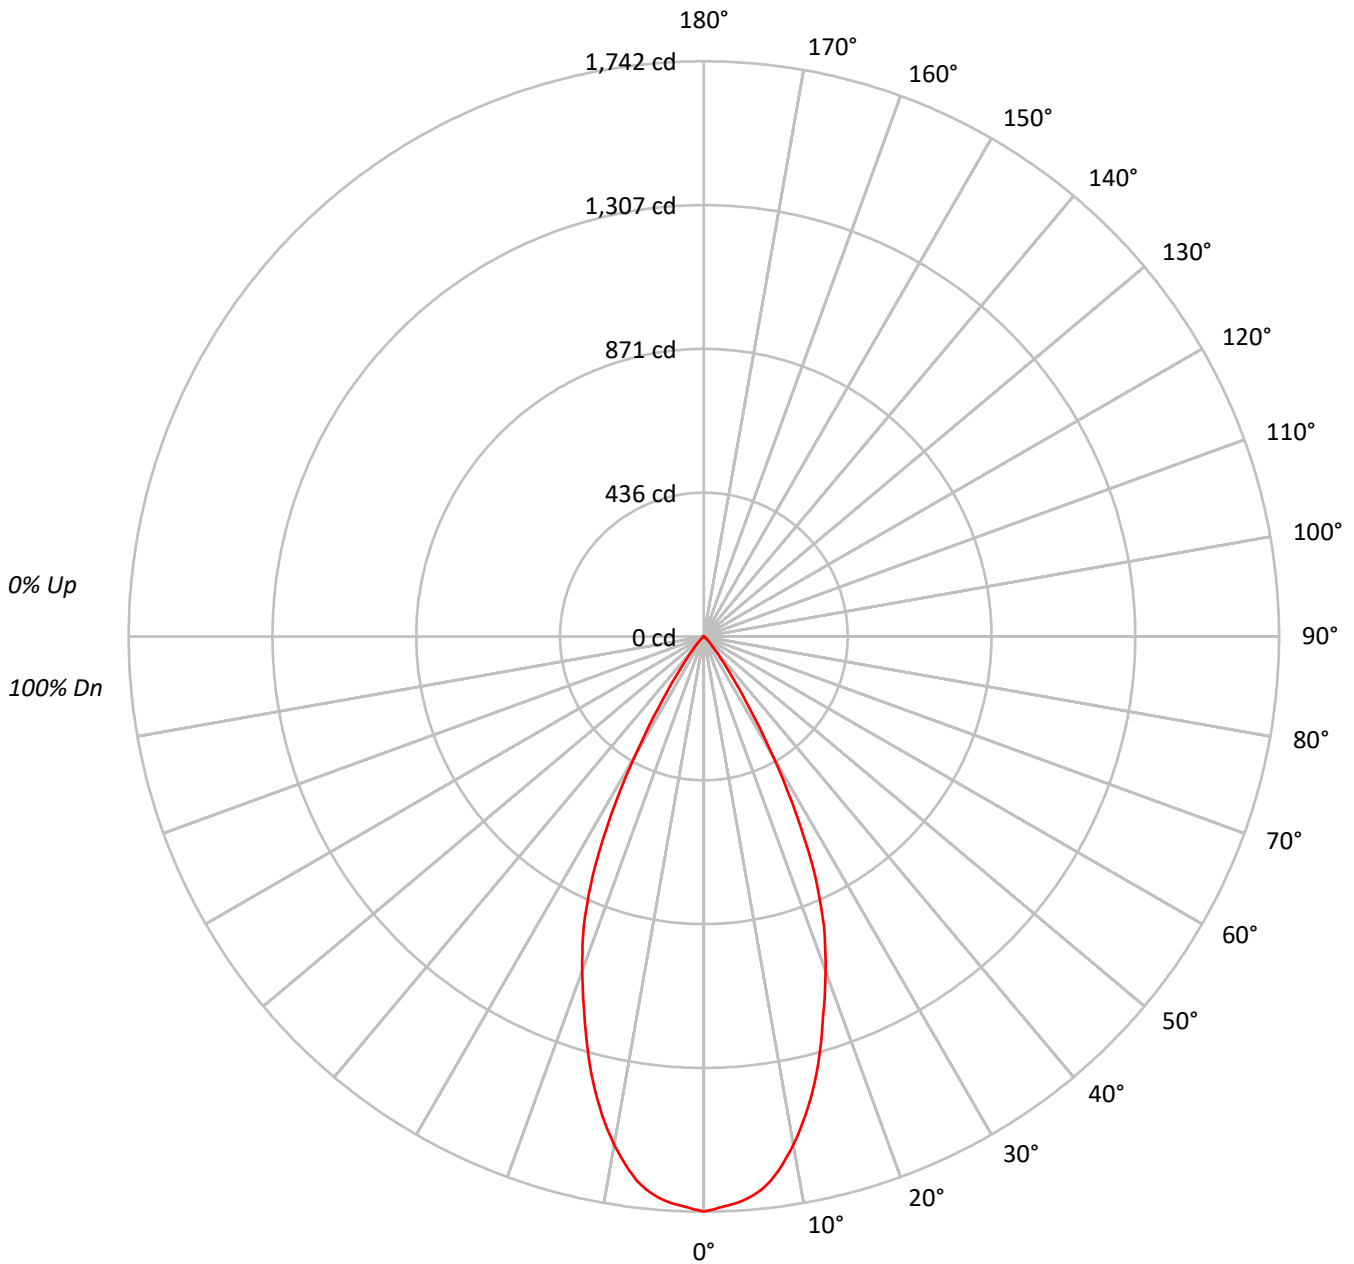



TEST NUMBER: P280492

CATALOG NUMBER: LDA2B109050D010 EU2B10WFL559050 2LBALD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	859288
5°	841770
10°	782820
15°	683456
20°	565872
25°	432824
30°	236818
35°	87692
40°	30334
45°	13675
50°	6447
55°	3183
60°	888
65°	584
70°	721
75°	0
80°	0
85°	0



TEST NUMBER: P280492

CATALOG NUMBER: LDA2B109050D010 EU2B10WFL559050 2LBALD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	15.7
10°-20°	369.8	36.8
20°-30°	349.6	34.7
30°-40°	107.6	10.7
40°-50°	17.0	1.7
50°-60°	3.6	0.4
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	877.4	87.2
0°-40°	985.0	97.9
0°-60°	1005.6	99.9
0°-90°	1006.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1006.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1742	
5°	1700	158
15°	1338	370
25°	795	350
35°	146	108
45°	20	17
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280492

CATALOG NUMBER: LDA2B109050D010 EU2B10WFL559050 2LBALD1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1741.7
1°	1735.2
2°	1727.3
3°	1720.7
4°	1712.3
5°	1699.7
6°	1683.4
7°	1661.5
8°	1632.1
9°	1598.0
10°	1562.6
11°	1523.4
12°	1481.9
13°	1436.6
14°	1389.5
15°	1338.1
17.5°	1202.4
20°	1077.8
22.5°	951.4
25°	795.1
27.5°	606.6
30°	415.7
32.5°	255.2
35°	145.6
37.5°	81.2
40°	47.1
42.5°	29.4
45°	19.6
47.5°	13.1
50°	8.4
52.5°	5.6
55°	3.7
57.5°	2.3
60°	0.9
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280492

CATALOG NUMBER: LDA2B109050D010 EU2B10WFL559050 2LBALD1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)