

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P497390

Luminaire Tested: **LDA2B158027R70D010 2LBDLC1MB**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P497390
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B158027R70D010 2LBDLC1MB
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 2700K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1352.3 lumens
Efficiency: N/A
Efficacy: 95.9 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P497390

CATALOG NUMBER: LDA2B158027R70D010 2LBDLC1MB

Luminous Intensity Polar Plot

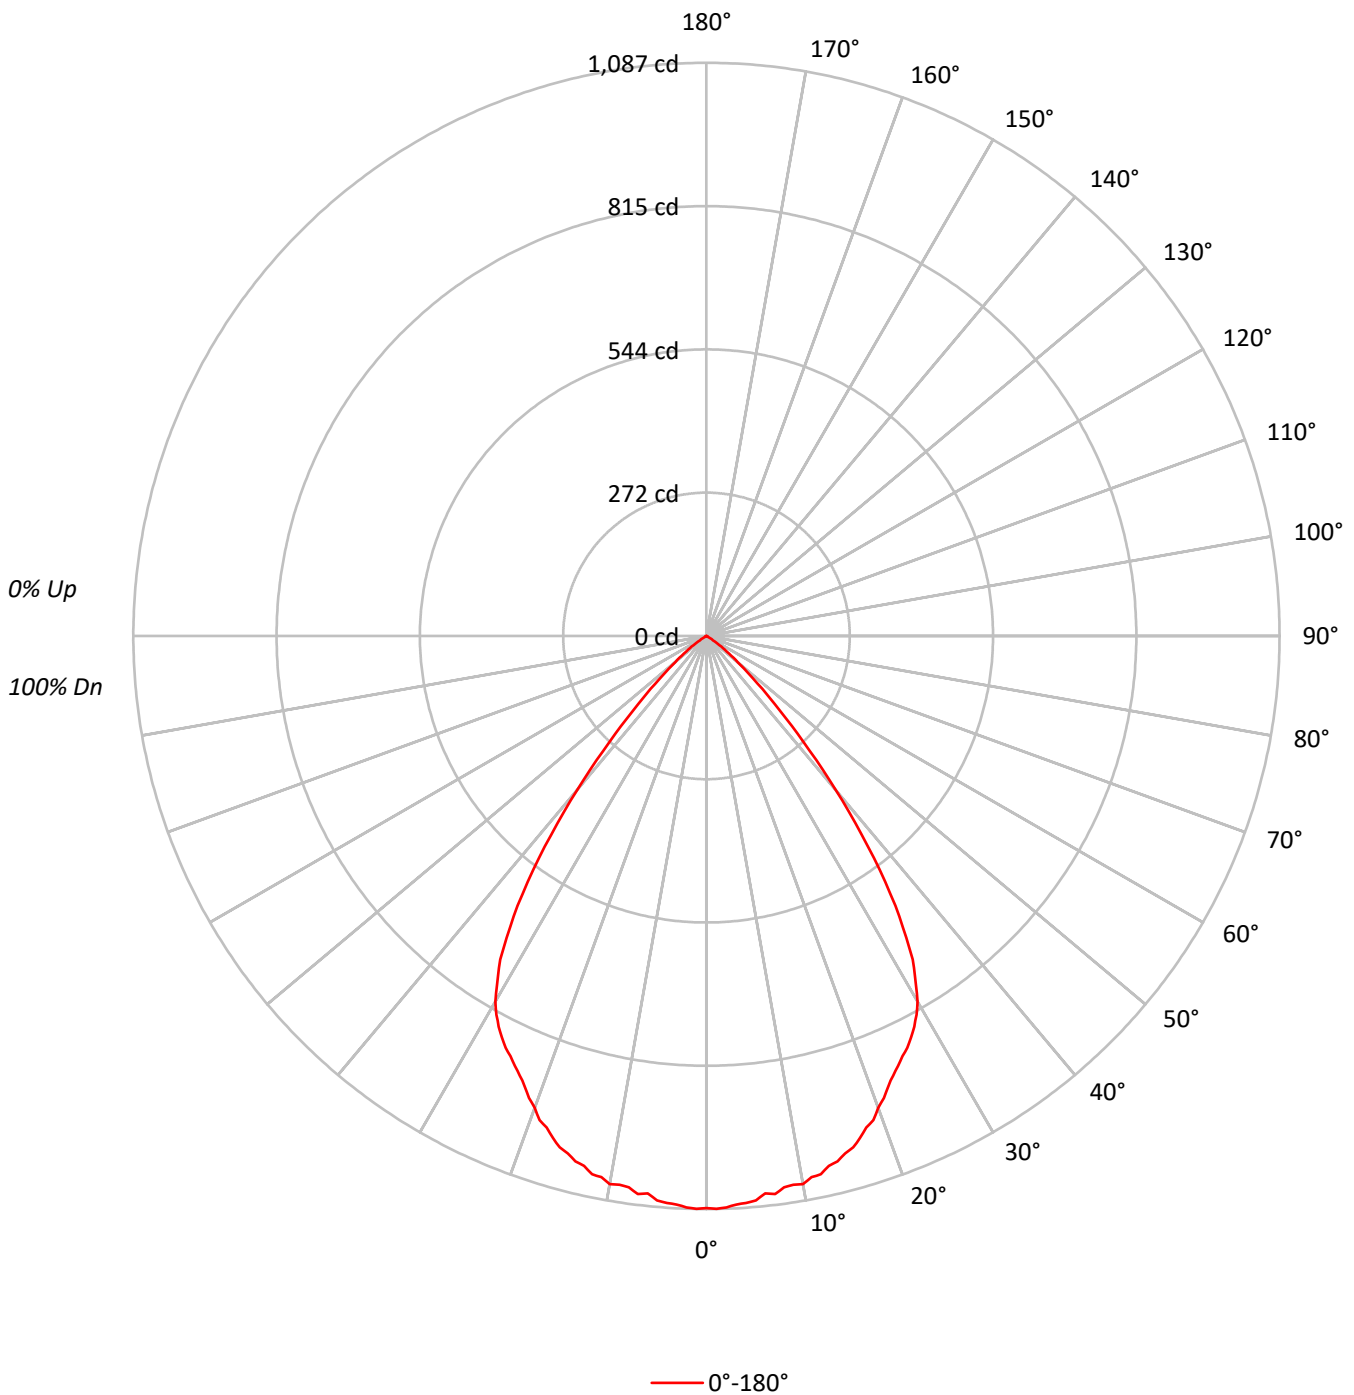



TEST NUMBER: P497390

CATALOG NUMBER: LDA2B158027R70D010 2LBDLC1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63	71	66	63	70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48
10	68	57	51	47	66	57	50	46	56	50	46	55	50	46	54	49	46	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	535396
5°	532291
10°	528727
15°	518887
20°	500138
25°	478823
30°	456147
35°	376367
40°	244670
45°	127822
50°	59484
55°	21762
60°	2171
65°	1751
70°	1010
75°	1334
80°	0
85°	0



TEST NUMBER: P497390

CATALOG NUMBER: LDA2B158027R70D010 2LBDLC1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.6	7.5
10°-20°	285.5	21.1
20°-30°	405.2	30.0
30°-40°	378.9	28.0
40°-50°	152.4	11.3
50°-60°	26.6	2.0
60°-70°	1.3	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	792.4	58.6
0°-40°	1171.3	86.6
0°-60°	1350.3	99.9
0°-90°	1352.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1352.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1085	
5°	1075	102
15°	1016	285
25°	880	405
35°	625	379
45°	183	152
55°	25	27
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P497390

CATALOG NUMBER: LDA2B158027R70D010 2LBDLC1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1085.2
1°	1086.7
2°	1084.5
3°	1080.0
4°	1077.8
5°	1074.8
6°	1062.9
7°	1066.6
8°	1056.2
9°	1053.9
10°	1055.4
11°	1045.7
12°	1043.5
13°	1031.6
14°	1027.1
15°	1015.9
16°	1009.2
17°	995.8
18°	980.2
19°	971.3
20°	952.6
21°	938.5
22.5°	912.4
23°	905.7
24°	893.1
25°	879.6
26°	869.2
27°	854.3
28°	839.4
29°	821.5
30°	800.7
32.5°	727.7
35°	624.9
37.5°	503.5
40°	379.9
42.5°	271.1
45°	183.2
47.5°	120.7
50°	77.5
52.5°	48.4
55°	25.3
57.5°	8.2
60°	2.2
62.5°	1.5
65°	1.5



TEST NUMBER: P497390

CATALOG NUMBER: LDA2B158027R70D010 2LBDLC1MB

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)