

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P492869

Luminaire Tested: **LDA2B059027R20D010 2LBD1MW-30DEG TILT**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P492869
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/8/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B059027R20D010 2LBD1MW-30DEG TILT
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2700K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 392.1 lumens
Efficiency: N/A
Efficacy: 56.0 lumens/watt
Spacing Criteria (0/90/45): 2.56 / 0.56 / 1.2
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P492869

CATALOG NUMBER: LDA2B059027R20D010 2LBD1MW-30DEG TILT

Luminous Intensity Polar Plot

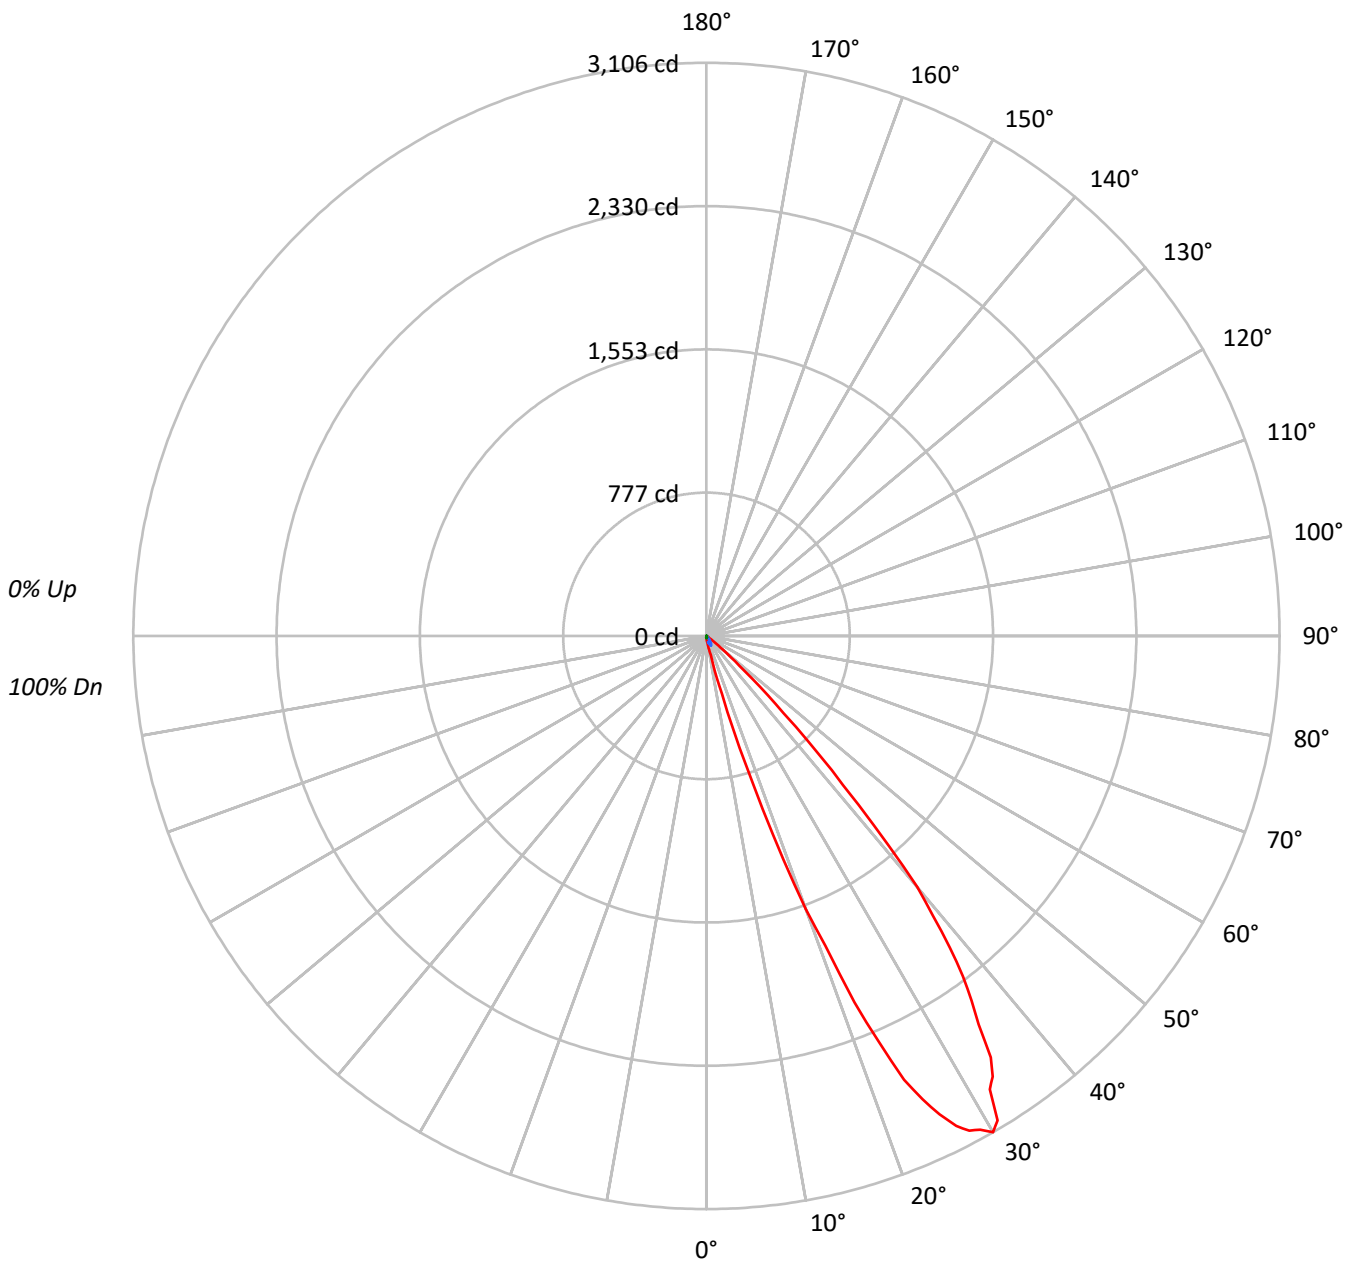

— 0°-180° - - - 45°-225° ····· 90°-270°



TEST NUMBER: P492869

CATALOG NUMBER: LDA2B059027R20D010 2LBD1MW-30DEG TILT

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	76	71	90	82	75	70	79	74	70	77	73	69	75	71	68	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53
7	74	63	55	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	43
9	64	53	45	40	63	52	45	40	51	45	40	50	44	40	49	44	40	38
10	60	48	41	36	59	48	41	36	47	41	36	46	40	36	45	40	36	34

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	6216	6216	6216
5°	11935	5497	4011
10°	28455	4809	2705
15°	165846	3831	1073
20°	827229	2363	315
25°	1508434	817	0
30°	1769214	0	0
35°	1548531	0	0
40°	1143554	0	0
45°	412212	0	0
50°	85810	0	0
55°	19611	258	0
60°	6216	296	0
65°	1401	700	0
70°	0	865	433
75°	0	1144	0
80°	0	1705	0
85°	0	3396	0



TEST NUMBER: P492869

CATALOG NUMBER: LDA2B059027R20D010 2LBD1MW-30DEG TILT

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1.4	0.4
10°-20°	21.5	5.5
20°-30°	145.2	37.0
30°-40°	169.7	43.3
40°-50°	49.5	12.6
50°-60°	3.3	0.8
60°-70°	0.6	0.2
70°-80°	0.5	0.1
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	168.2	42.9
0°-40°	337.8	86.2
0°-60°	390.6	99.6
0°-90°	392.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	392.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	13	13	13	13	13	
5°	24	17	11	9	8	3
15°	325	37	8	4	2	169
25°	2771	57	2	0	0	1227
35°	2571	31	0	0	0	1579
45°	591	6	0	0	0	544
55°	23	1	0	0	0	29
65°	1	1	1	1	0	2
75°	0	1	1	1	0	0
85°	0	1	1	1	0	0
90°	0	0	0	0	0	



TEST NUMBER: P492869

CATALOG NUMBER: LDA2B059027R20D010 2LBD1MW-30DEG TILT

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6
2.5°	16.2	16.2	14.4	12.9	11.7	11.1	10.8	10.2	9.9
5°	24.1	21.0	17.4	13.5	11.1	10.2	9.3	8.4	8.1
7.5°	35.2	30.7	21.0	13.8	10.5	9.0	8.1	7.2	6.6
10°	56.8	44.2	25.9	13.8	9.6	7.8	6.6	5.7	5.4
12.5°	104.9	67.6	31.0	13.5	8.7	6.6	5.1	4.5	3.6
15°	324.7	140.1	36.7	12.9	7.5	5.1	3.9	2.4	2.1
17.5°	839.7	327.1	40.9	11.4	6.0	3.6	1.8	1.5	1.5
20°	1575.6	593.2	46.9	9.9	4.5	2.4	1.2	0.9	0.6
21°	1797.5	725.7	49.9	9.3	3.9	1.5	0.9	0.3	0.3
22°	2142.3	870.3	52.3	8.7	3.3	0.9	0.6	0.3	0.0
23°	2388.0	962.6	54.7	7.8	2.4	0.9	0.3	0.0	0.0
24°	2633.6	1080.2	56.2	7.2	2.1	0.6	0.3	0.0	0.0
25°	2771.0	1178.2	56.8	6.6	1.5	0.3	0.0	0.0	0.0
26°	2884.0	1243.7	57.1	6.0	0.9	0.0	0.0	0.0	0.0
27°	2980.8	1319.8	56.5	5.4	0.9	0.0	0.0	0.0	0.0
28°	3035.8	1332.4	55.6	4.8	0.3	0.0	0.0	0.0	0.0
29°	3059.6	1317.1	52.9	4.2	0.3	0.0	0.0	0.0	0.0
30°	3105.6	1302.7	50.2	3.9	0.0	0.0	0.0	0.0	0.0
31°	3063.2	1254.9	46.9	3.3	0.0	0.0	0.0	0.0	0.0
32°	2897.2	1214.6	43.0	2.7	0.0	0.0	0.0	0.0	0.0
33°	2847.6	1131.9	38.8	2.4	0.0	0.0	0.0	0.0	0.0
34°	2754.1	1008.9	35.2	2.1	0.0	0.0	0.0	0.0	0.0
35°	2571.1	907.3	30.7	1.8	0.0	0.0	0.0	0.0	0.0
36°	2443.3	791.3	26.8	1.5	0.0	0.0	0.0	0.0	0.0
37°	2309.5	690.0	23.8	1.2	0.0	0.0	0.0	0.0	0.0
38°	2143.2	583.5	20.1	0.9	0.0	0.0	0.0	0.0	0.0
39°	1949.6	482.2	17.1	0.9	0.0	0.0	0.0	0.0	0.0
40°	1775.6	388.7	14.7	0.6	0.0	0.0	0.0	0.0	0.0
42.5°	1095.8	221.9	8.7	0.6	0.0	0.0	0.0	0.0	0.0
45°	590.8	134.7	6.3	0.3	0.0	0.0	0.0	0.0	0.0
47.5°	272.1	62.8	4.5	0.3	0.0	0.0	0.0	0.0	0.0
50°	111.8	28.0	3.3	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	40.3	15.6	2.1	0.0	0.0	0.3	0.0	0.0	0.0
55°	22.8	9.0	1.2	0.3	0.3	0.3	0.3	0.0	0.0
57.5°	10.8	5.1	0.3	0.3	0.3	0.3	0.3	0.0	0.0
60°	6.3	2.7	0.3	0.3	0.3	0.6	0.3	0.0	0.0
62.5°	3.0	0.9	0.3	0.6	0.6	0.6	0.6	0.3	0.0
65°	1.2	0.3	0.6	0.6	0.6	0.9	0.6	0.3	0.0
67.5°	0.3	0.3	0.6	0.6	0.6	0.9	0.6	0.3	0.3
70°	0.0	0.3	0.6	0.6	0.6	0.9	0.6	0.3	0.3
72.5°	0.0	0.3	0.6	0.6	0.6	0.9	0.6	0.3	0.3
75°	0.0	0.3	0.6	0.6	0.6	0.6	0.6	0.3	0.0
77.5°	0.0	0.3	0.6	0.6	0.6	0.6	0.6	0.3	0.0
80°	0.0	0.3	0.6	0.6	0.6	0.6	0.6	0.3	0.0



TEST NUMBER: P492869

CATALOG NUMBER: LDA2B059027R20D010 2LBD1MW-30DEG TILT

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
82.5°	0.0	0.3	0.6	0.6	0.6	0.6	0.6	0.3	0.0
85°	0.0	0.3	0.6	0.6	0.6	0.6	0.6	0.3	0.0
87.5°	0.0	0.3	0.6	0.6	0.6	0.6	0.3	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)